

Internet-Box 3 network wiring cupboard bracket

Install the Internet-Box 3 in the wiring cupboard

(Deutsch auf der Rückseite)




Start The package includes:



1 Unscrew the stand of the Internet-Box 3.




2 Install the two mounting brackets and hang the Internet-Box in the wiring cupboard.

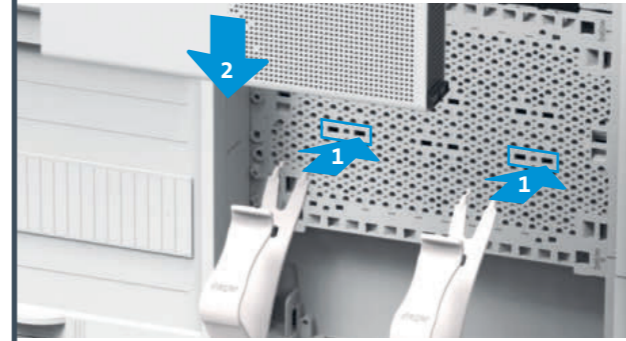


Optional: Use the enclosed screws to fix the bracket.

3 Connect the power supply and the fibre optic cable ...

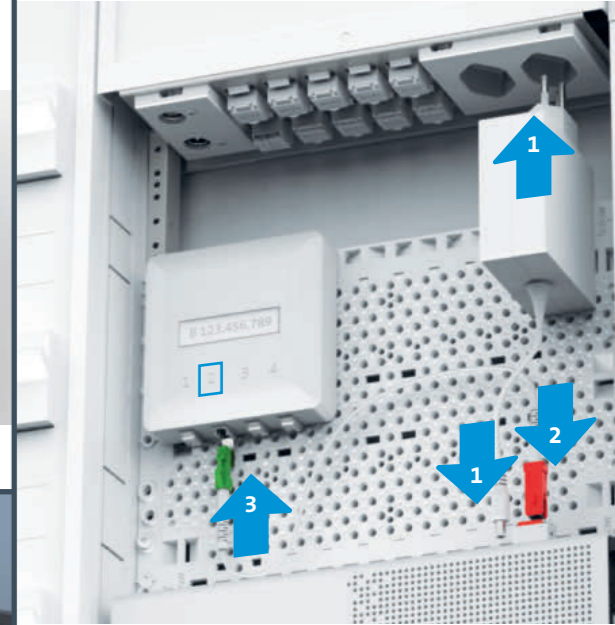

... or the DSL cable.

For more information see www.swisscom.ch/home-networking

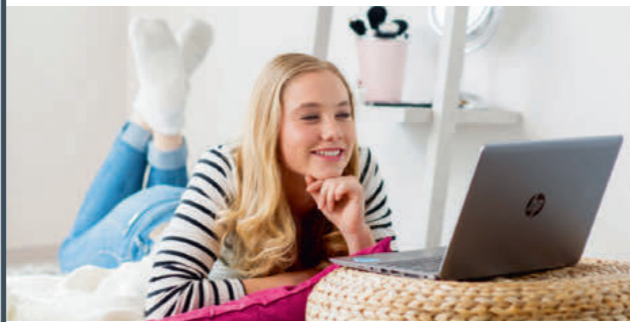


Installation example

Network connection in one room




8 Your Internet-Box is now fully installed.

Optional: Connect a corded telephone to the Internet-Box.

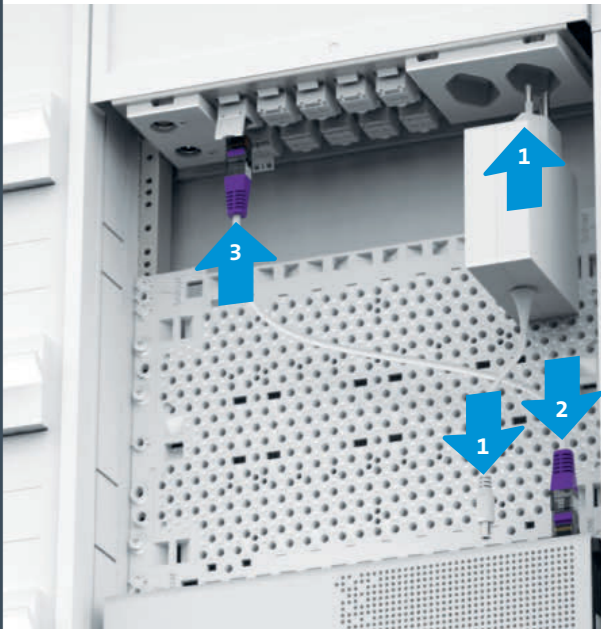

Please refer to the Internet-Box instructions for help.

4 Connect the network ports with the Internet-Box.

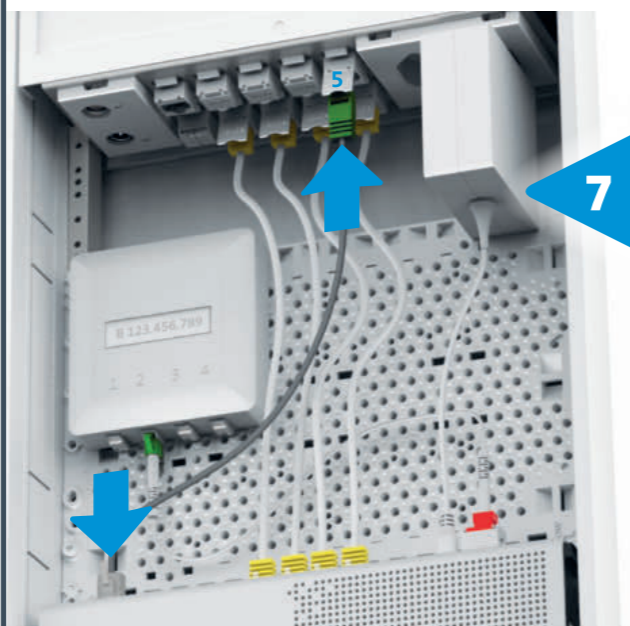

Connect the phone to a network port. Use the telephone cable to connect the «phone» port on the Internet-Box to the corresponding network port.

Optional: Connect your HD-Phone.




HD-Phones connect to the Internet-Box, even when they are in the wiring cupboard. If the distance is too great, you can use a DECT repeater, available in the online shop as «Gigaset Repeater HX».

Optional: Connect a WLAN-Box.



Note: WLAN and DECT reception is greatly impaired in the wiring cupboard. To improve WLAN performance, we recommend connecting a WLAN-Box 2 in a central room. More information on the WLAN-Box: swisscom.ch/wlan-box2

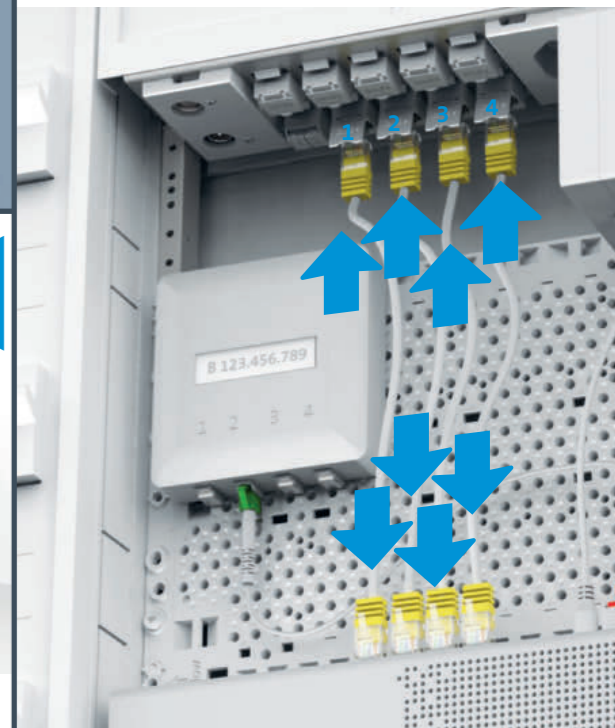

The ports in the wiring cupboard correspond to the network ports in your rooms (same number). You can connect devices to the Internet via cables there.