




Extend Swisscom TV / DSL

Optical connection kit set-up




Installation




Warning:

Do not bend and kink the optical cable!
Loop diameter should never be smaller
than 2 cm.

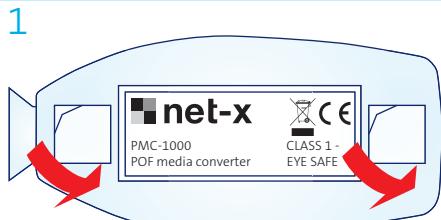


If necessary, secure the media converter to
the DSL modem and Swisscom TV-Box or
computer using double sided adhesive
tape.

4

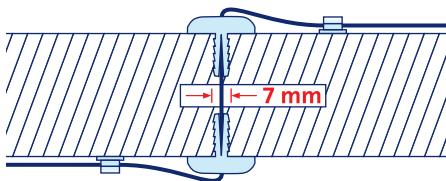


When laying cable through walls use
protective cable bushings. Diameter of
hole 7 mm.

5

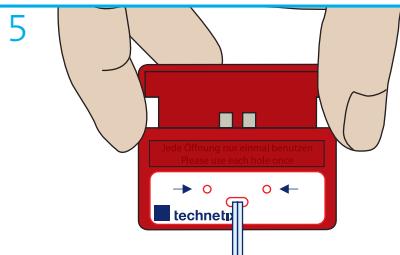


Note: Check length of cable. Cut to correct
length using lower opening on the cutter.

8

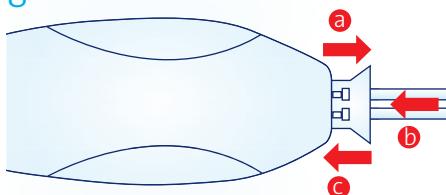


First end of cable: Pull out clip, push in
cable as far as possible, push clip closed,
(steps a to c).

9

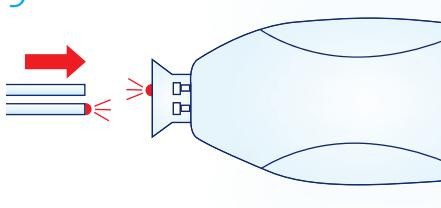


Second end of cable: Connect flashing
end to flashing connection.

2

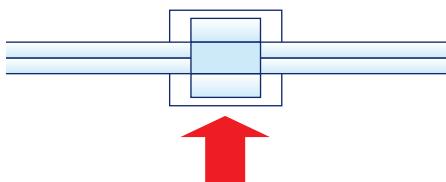


Lay the cable: Secure along walls using cable clips.

3

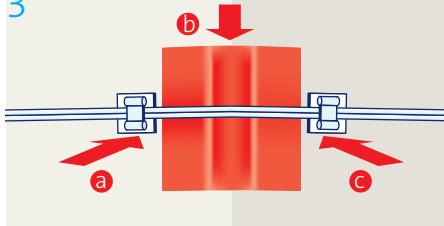


When laying the cable around corners, use the corner template. Refer to steps **a** to **c**. Remove template.

6




Cut both ends of cable for optimum connection. Use the upper opening on the cutter to do this.

7

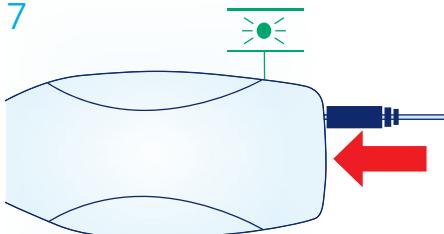


Connect both media converters to the power supply using the mains adapter.

10

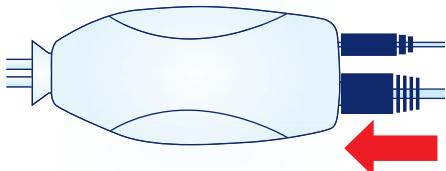


Connect both media converters with Ethernet cables to DSL modem and Swisscom TV-Box or computer.

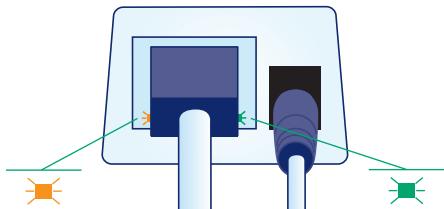


Check connections: LEDs on the Ethernet connectors must flash orange and green. In the event of any disruption, see reverse side.

Assembly and equipment markings

* Included in the delivery

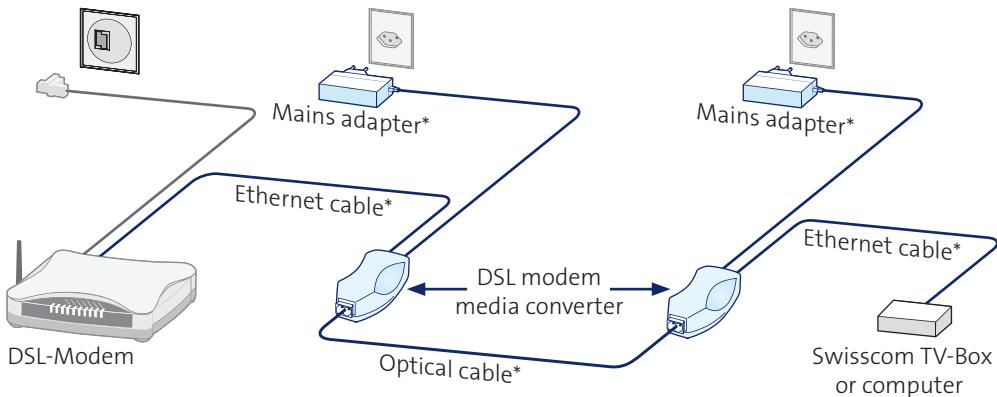


Also included in the delivery:



1 cutting tool for the optical cable



30 self-adhesive cable clips



6 protective cable bushings



1 bending radius template

Troubleshooting

In the event of malfunction, check the LED displays on both pieces of equipment.



No connection.

- Check the mains adapter, the Ethernet connections and the optical cable.



No Ethernet connection.

- Check the Ethernet connections.



No optical connection.

- Check the optical connections.



Optical cable damaged.

- In the event of poor reception, remove the damaged component or replace the optical cable. (Order no. 125-118)

Support

If you experience problems, please refer to the troubleshooting tips. If you are unable to resolve the problems yourself, please contact our customer services on 0800 800 800 (Swisscom local tariff).