

WSG B2B Web Service Tutorial

Version	34
Issue date	20.09.2017
Replaces version	33
Valid from	10.10.2017
Valid until	recalled or replaced by new version
Classification	Technical Support Documentation (BBCS and FA)
Status	Released

- **Contents**

Release	4
1 Introduction	5
1.1 Purpose	5
1.2 Target readership, requirements of the reader	5
1.3 Referenced documents	5
2 Notification (Tracking)	6
2.1 Subscribe to Notifications	6
2.2 Notification Web Service	8
3 Fulfillment (BBCS Order)	13
3.1 Process Overview	13
3.2 Qualification	14
3.3 Customer order creation	31
3.4 Modification of Base Product (Access) and Addition of Streaming Service	34
3.5 Change of Best Effort Service (Speed) and Reduction of Streaming Service	37
3.6 Change of Internet Service Provider	39
3.7 Deprovisioning	40
3.8 Products, Restrictions and Dependencies	43
4 Fulfillment (ULL Orders)	45
4.1 Qualification	45
4.2 Creating a Full Access subscription	48
4.3 Modification of a Full Access description	50
4.4 Disconnection of a Full Access subscription	52
5 Assurance (BBCS Trouble Ticket)	52
5.1 Process Overview	52
5.2 Creation of a Trouble Ticket	54
5.3 Trouble Ticket Types and Restrictions	57
5.4 AccessProfile modification	57
6 Voice Messages	126
6.1 GUI	126
6.2 Notifications	127
7 Appendix A: Notifications created for "Fulfillment (BBCS Order)"	128
7.1 Request	128
7.2 Response	128
8 Appendix B: Notifications created for "Assurance (BBCS Trouble Ticket)"	148
8.1 Request	148
8.2 Response	149
9 Appendix C: getDetail BBCS TroubleTicket	152
9.1 Request	152
9.2 Response	153
10 Appendix D: getOrderDetail	156
10.1 Request	156
10.2 Response	157

Checklist of changes

Version	Date	Changed by	Comments / nature of the change
0.1	29.10.2010	HP	- Initial version
0.2	02.12.2010	HP	- Worked over after review with Swisscom
0.3	02.02.2011	HP	- Updated to BB-V20
11	08.06.2011	HP	- Updated for newer B2B versions
12	25.08.2011	Peter Rosenberger	- Review xml Requests
13	21.10.2011	HP	- Corrected XML-Requests and adding FA - Updated for new WS versions
14	26.03.2012	Roland Staub	- Updated for newer B2B Versions
15	19.09.2012	Roland Staub	- Update for newer B2B Versions
16	05.05.2012	Roland Staub	- Update for newer B2B Mai13
17	15.07.2012	Roland Staub	- Update for newer B2B Aug13
18	25.07.2012	Roland Staub	- Update for newer B2B Aug13
19	06.02.2014	Roland Staub	- Update for newer B2B Feb14
20	28.04.2014	Roland Staub	- Update for newer B2B Mai14
21	08.08.2014	Roland Staub	- Update for newer B2B Aug14
22	29.10.2014	Roland Staub	- Update for newer B2B Nov14
23	21.01.2015	Roland Staub	- Update for newer B2B March15
26	22.05.2015	Roland Staub	- Update for newer B2B June15
25	03.07.2015	Roland Staub	- Update for newer B2B Aug15
26	18.10.2015	Roland Staub	- Update for newer B2B Nov15
27	19.01.2016	Roland Staub	- Update for newer B2B Feb16
28	29.04.2016	Roland Staub	- Update for newer B2B May16
29	30.09.2016	Roland Staub	- Update for newer B2B Nov16
30	09.02.2017	Roland Staub	- Update for newer B2B March17
31	21.05.2017	Roland Staub	- Update for newer B2B June
32	12.07.2017	Roland Staub	- Update for newer B2B August 17
33	18.08.2017	Roland Staub	- Update for newer B2B September 17
33	20.09.2017	Roland Staub	- Update for newer B2B October 17

Release

int.Version	Date	Released by	Comments / nature of the change
10	25.02.2011	A. Studerus (iA rope1)	Released for WSG-8.3 (Mar 2011)
11	10.06.2011	A. Studerus (iA rope1)	Released for WSG-8.4 (Jun 2011)
13	25.10.2011	H.Künzi	Released for WSG-8.6 (Nov 2011)
14	28.03.2012	H.Künzi	Released for WSG-9.0 (Mai 2012)
15	28.09.2012	H.Künzi	Released for WSG-9.2 (Oct 2012)
16	08.05.2013	H.Künzi	Released for WSG-9.4 (Mai 2013)
17	16.07.2013	H.Künzi	Released for WSG-9.5 (Aug 2013)
19	10.02.2014	H.Künzi	Released for WSG-9.7 (Feb2014)
20	05.05.2014	H.Künzi	Released for WSG-9.8 (Mai2014)
21	13.08.2014	H.Künzi	Released for WSG-9.9 (Aug2014)
22	04.11.2014	H.Künzi	Released for WSG-9.10 (Nov2014)
23	17.02.2015	H.Künzi	Released for WSG-9.11 (Mar2015)
26	28.05.2015	H.Künzi	Released for WSG-9.12 (Jun2015)
25	31.07.2015	H.Künzi	Released for WSG-9.13 (Aug2015)
26	20.10.2015	H.Künzi	Released for WSG-9.14 (Nov2015)
27	20.01.2016	H.Künzi	Released for WSG-9.15 (Feb2016)
28	04.05.2016	H.Künzi	Released for WSG-9.16 (Mai2016)
29	01.11.2016	H.Künzi	Released for WSG-9.18 (Nov2016)
30	13.02.2017	H.Künzi	Released for WSG-9.19 (Mar2017)
31	22.05.2017	H.Künzi	Released for WSG1706 (Jun2017)
32	17.07.2017	H.Künzi	Released for WSG-08.17(Aug2017)
33	26.09.2017	H.Künzi	Released for WSG1710 (Oct 2017)

1 Introduction

1.1 Purpose

This document provides information on how to integrate an ISP's/PTS's fulfillment (order handling) and assurance (trouble ticketing) system using the Web services offered by WSG. The following services are covered with examples:

- Notification
- Fulfillment
- Assurance

1.2 Target readership, requirements of the reader

This document addresses architects and developers of client applications using the services mentioned above. Knowledge of Web service technology, the WSG system and the BBCS ordering process are needed.

1.3 Referenced documents

- [1] B2B Interfaces Overview, B2B_Interfaces-Overview.doc
- [2] WSG Model Notification - WEB Outbound (v20.0.1), wsgNotification_v20.0.1.zip
- [3] WSG Model - WEB Outbound (v34.0.1), wsgBb_v34.0.1.zip
- [4] WSG Model - WEB Outbound Trouble Ticket (v28.0.2), wsgTt_v28.0.2.zip
- [5] WSG Model - FA / TAL - Fulfillment (v12.0.0), wsgFa_v12.0.0.zip
- [6] WSG Model - FA / TAL - Assurance (v3.0.0), wsgFaa_v3.0.0.zip

2 Notification (Tracking)

The Notification Service is used to track the processing of Orders in WSG and acts as a replacement for the different list functions of the file transfer (listRequest, listTdmMessageRequest, etc.) and the notification by email.

Instead of requesting a list of orders in form of a file the Notification Service offers the possibility to subscribe to notification messages which are created if a specific event occurs. They can then be retrieved via the Notification Web service and remain on the system for a defined number of days (currently 4 days). The notification messages contain the data that is needed to keep the client system up-to-date with the progress of an order. If at a certain point more data is needed, there is always the possibility to retrieve all the details of an order by using a different Web service , e.g. the BB Outbound service for orders.

2.1 Subscribe to Notifications

Changes to the following objects can be notified:

- BBCS-Order
- BBCS-Installation Ticket
- BBCS-Access TT
- BBCS-Connectivity TT
- FA-Order
- FA-TT
- FA-Clarification T
- Information Request
- NetworkCustomerNotifications
- Voice Business

The notifications can be subscribed to in the administration of the corresponding service, for example in the BBCS Order GUI as shown on the next screen shots:

Order settings	Installation Ticket settings	Voice Message Settings	ISP Pool Settings	All ISP Pool Settings				
BB Order settings								
Voice message e-mail: xyz@zyx.net								
☐ Notify voice message								
State change e-mail: xyz@zyx.net								
Notify on entering state								
Object Type	Initiator	Activator	Object State	Step	Event	Comment	By Email	By Notification
-	ISP	Order	ENTERED	-	Order Notification	BBCS Order by ISP Status ENTERED	☐	☒
-	ISP	Order	HOLDING	-	Order Notification	BBCS Order by ISP Status HOLDING	☐	☒
-	ISP	Order	CHECKED	-	Order Notification	BBCS Order by ISP Status CHECKED	☐	☒
-	ISP	Order	EXECUTED	-	Order Notification	BBCS Order by ISP Status EXECUTED	☐	☒
-	ISP	Order	REJECTED	-	Order Notification	BBCS Order by ISP Status REJECTED	☐	☒
-	ISP	Order	COMPLETED	-	Order Notification	BBCS Order by ISP Status COMPLETED	☐	☒
-	ISP	Order	EXCEPTION	-	Order Notification	BBCS Order by ISP Status EXCEPTION	☐	☒
-	SCS	Order	COMPLETED	-	Order Notification	BBCS Order by SCS Status COMPLETED	☐	☒
Special informations e-mail: xyz@zyx.net								
☐ Notify special informations								
Special order notification e-mail: xyz@zyx.net								
back submit reset								

Order settings

Installation Ticket settings

Voice Message Settings

ISP Pool Settings

All ISP Pool Settings

Notify on entering state

Object Type	Initiator	Activator	Object State	Step	Event	Comment	By Notification
GV01	-	-	-	-	Classical Notification	New Subscriber	☒
GV02	-	-	-	-	Classical Notification	New Subscriber	☒
GV03	-	-	-	-	Classical Notification	Relocation	☒
GV04	-	-	-	-	Classical Notification	Relocation	☒
GV05	-	-	-	-	Classical Notification	Temporary Lines	☒
GV06	-	-	-	-	Classical Notification	Temporary Lines	☒
GV11	-	-	-	-	Classical Notification	Correction	☒
GV12	-	-	-	-	Classical Notification	Transfer	☒
GV14	-	-	-	-	Classical Notification	Cancellation	☒
GV15	-	-	-	-	Classical Notification	Relocation	☒
GV16	-	-	-	-	Classical Notification	Number Change	☒
GV17	-	-	-	-	Classical Notification	Access Type Change	☒
GV25	-	-	-	-	Classical Notification	Temporary Service Canceled	☒
GV37	-	-	-	-	Classical Notification	Temporary Service Canceled	☒

back

submit


reset

2.2 Notification Web Service

The Notification Web service is used to retrieve the notifications created based on the subscriptions to the different objects that can be notified.

For a detailed interface definition see [2]

2.2.1 Request

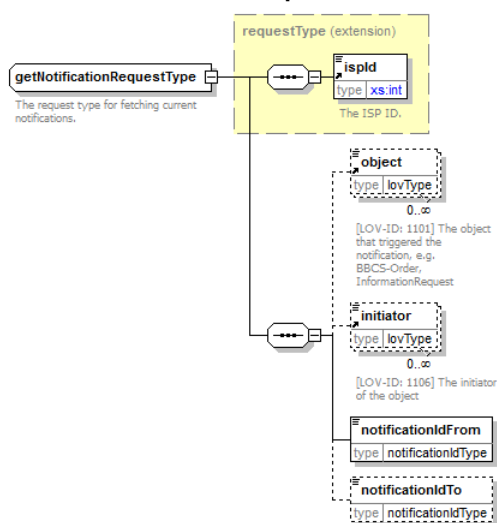


The typical usage is to periodically poll for all new notifications for a specific ISP/PTS. This can be achieved by calling the getNotification() operation with the "ispid" of the ISP/PTS and the "notificationIdFrom" set to the

maximum value received on the previous call + 1 (boundaries are included in the selection). It is also possible to additionally filter the notifications by object which is useful if the states of the different objects are tracked by different client processes.

A sample XML for the getNotification() request:

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:request>
        <v20:ispId>777710</v20:ispId>
        <v20:object>3</v20:object>
        <v20:notificationIdFrom>82178505</v20:notificationIdFrom>
      </v20:request>
    </v20:getNotification>
  </soapenv:Body>
</soapenv:Envelope>
```


2.2.2 Response

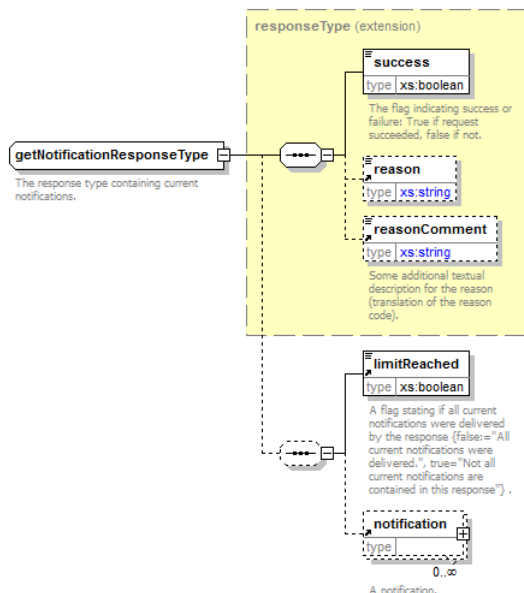

The response contains the “success” flag which indicates whether the operation succeeded or failed. In case of failure the “reason” and “reasonComment” offer additional information about the problem that occurred. The payload consists of a flag “limitReached” and a list of “notifications”. If the flag “limitReached” is true then there

are more notifications available and it is good practice to repeat the retrieval of notifications immediately until the flag is “false” instead of waiting for the next interval.

The notifications contain the fields that are common for all types of notifications and data structures that are populated depending on the object. The following picture shows the structure of a notification for a “BBCS Access” order:

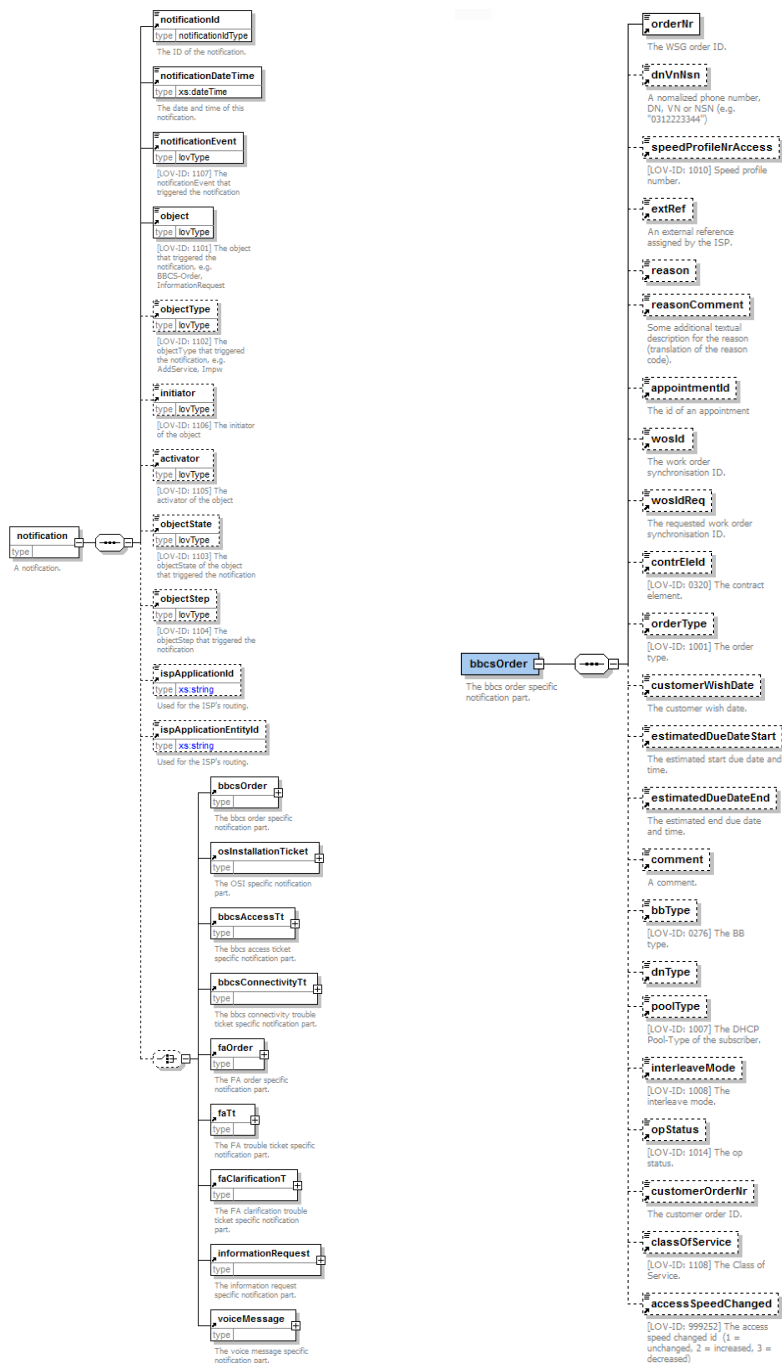

Common notification fields

Object specific fields

A sample XML for the getNotification() response:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:response>
```

```

<v20:success>true</v20:success>
<v20:limitReached>>false</v20:limitReached>
<v20:notification>
  <v20:notificationId>47408113</v20:notificationId>
  <v20:notificationDateTime>2012-08-06T12:11:52.834+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>2</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>10000820120412028889000000</v20:orderNr>
    <v20:dnVnNsn>0819336410</v20:dnVnNsn>
    <v20:contrEleId>110</v20:contrEleId>
    <v20:orderType>1</v20:orderType>
    <v20:estimatedDueDateStart>2012-12-
10T06:02:00.000+01:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2012-12-
10T12:00:00.000+01:00</v20:estimatedDueDateEnd>
    <v20:bbType>1</v20:bbType>
    <v20:customerOrderNr>10000820120412028889000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  </v20:bbcsOrder>
</v20:notification>
</v20:response>
</v20:getNotificationResponse>
</soapenv:Body>
</soapenv:Envelope>


```

3 Fulfillment (BBCS Order)

For a detailed interface definition see [3].

3.1 Process Overview

The following picture shows the interactions between the ISP's fulfilment system and WSG:

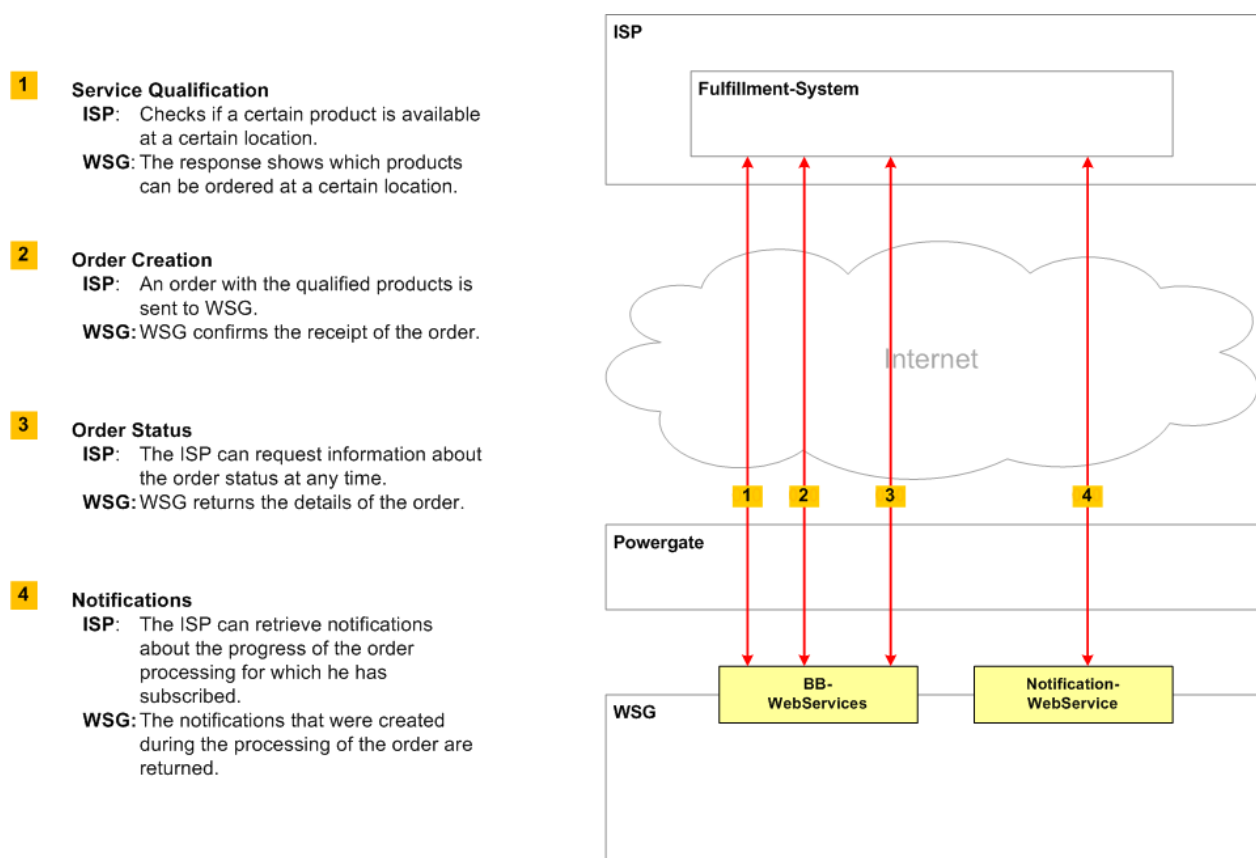

3.2 Qualification

The qualification delivers the capabilities (e.g. available speeds) of a location and should be used to determine if a certain service can be ordered at that location. The following example shows a qualification for an existing voice subscriber.

3.2.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v34:srvQualifByNumber>
      <v34:request correlationId="RegrTest T123 WS qualifByNr">
        <v34:ispId>777710</v34:ispId>
        <v34:basisContrEleId>120</v34:basisContrEleId>
        <v34:contrEleId>100</v34:contrEleId>
        <v34:bbType>2</v34:bbType>
        <v34:qualifExtRef>Regression WS qualifByNr</v34:qualifExtRef>
        <v34:synchWithVoice>>false</v34:synchWithVoice>
        <v34:sfSlaId>1</v34:sfSlaId>
        <v34:customerWishDate>2017-05-22+02:00</v34:customerWishDate>
        <v34:dnVnNsn>0719875577</v34:dnVnNsn>
      </v34:request>
    </v34:srvQualifByNumber>
  </soapenv:Body>
</soapenv:Envelope>
```

3.2.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v34:srvQualifByNumberResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="RegrTest T123 WS qualifByNr">
        <v34:success>>true</v34:success>
        <v34:dnStnr>0719875577</v34:dnStnr>
        <v34:qualificationResult>
          <v34:contrEleId>120</v34:contrEleId>
          <v34:contrEleId>100</v34:contrEleId>
          <v34:bbType>2</v34:bbType>
          <v34:dnType>13</v34:dnType>
          <v34:qualifNr>147109999</v34:qualifNr>
          <v34:lineState>1</v34:lineState>
          <v34:qualifAnswer>
            <v34:qualiResultState>ok</v34:qualiResultState>
            <v34:qualiResultDetail>
              <v34:resultCode>Q00</v34:resultCode>
              <v34:resultComment>This telephone line is suitable for
xDSL.</v34:resultComment>
            </v34:qualiResultDetail>
          <v34:endPoint>
            <v34:taxRegion>64</v34:taxRegion>
            <v34:accessNet>BOL</v34:accessNet>
            <v34:site>BOLQ</v34:site>
          </v34:endPoint>
        </v34:qualificationResult>
      </v34:response>
    </v34:srvQualifByNumberResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

<v34:siteCategory>6</v34:siteCategory>
<v34:bbDeviceLocation>DELOC</v34:bbDeviceLocation>
<v34:availableTechnologyType>
  <v34:technologyType>2</v34:technologyType>
  <v34:technologyType>1</v34:technologyType>
</v34:availableTechnologyType>
<v34:bbPortInfo>
  <v34:dslamName>IPC-SUR710-S-VD-05</v34:dslamName>
  <v34:dslamType>3</v34:dslamType>
  <v34:bbPortNr>VDSL-1-2-1-3</v34:bbPortNr>
  <v34:bbAdslEmulated>1</v34:bbAdslEmulated>
</v34:bbPortInfo>
</v34:endPoint>
<v34:plannedEndPoint>
  <v34:taxRegion>64</v34:taxRegion>
  <v34:accessNet>BOL</v34:accessNet>
  <v34:site>BOLP</v34:site>
  <v34:bbDeviceLocation>BOLD</v34:bbDeviceLocation>
  <v34:equippedDate>2017-06</v34:equippedDate>
  <v34:equippedDateQuality>1</v34:equippedDateQuality>
  <v34:equippedDateComment>The new endpoint will be available on 2017-
06</v34:equippedDateComment>
  <v34:equippedDateHistory>
    <v34:sortNr>3</v34:sortNr>
    <v34:changeDate>2015-09-26</v34:changeDate>
    <v34:eventType>1</v34:eventType>
    <v34:from>2015-03-21</v34:from>
    <v34:to>2015-11-21</v34:to>
    <v34:changeReasonId>3</v34:changeReasonId>
    <v34:changeReasonDescription>Missing
material</v34:changeReasonDescription>
  </v34:equippedDateHistory>
  <v34:equippedDateHistory>
    <v34:sortNr>1</v34:sortNr>
    <v34:changeDate>2015-05-12</v34:changeDate>
    <v34:eventType>2</v34:eventType>
    <v34:from>98</v34:from>
    <v34:to>3</v34:to>
    <v34:changeReasonId>6</v34:changeReasonId>
    <v34:changeReasonDescription>Management re-
priorisation</v34:changeReasonDescription>
  </v34:equippedDateHistory>
  <v34:equippedDateHistory>
    <v34:sortNr>2</v34:sortNr>
    <v34:changeDate>2015-01-31</v34:changeDate>
    <v34:eventType>2</v34:eventType>
    <v34:from>3</v34:from>
    <v34:to>98</v34:to>
    <v34:changeReasonId>6</v34:changeReasonId>
    <v34:changeReasonDescription>Management re-
priorisation</v34:changeReasonDescription>
  </v34:equippedDateHistory>
  <v34:plannedSpeed>
    <v34:up>1000</v34:up>
    <v34:down>8000</v34:down>
  </v34:plannedSpeed>
  <v34:extensionCategory>3</v34:extensionCategory>
</v34:plannedEndPoint>
<v34:cpeInfo>
  <v34:cpeName>Motorola 7347-44 POTS rel.7.9</v34:cpeName>
  <v34:dslamTypeAllowed>
    <v34:technology>1</v34:technology>
    <v34:dslamType>1</v34:dslamType>
  </v34:dslamTypeAllowed>
  <v34:dslamTypeAllowed>

```

```

        <v34:technology>2</v34:technology>
        <v34:dslamType>2</v34:dslamType>
        <v34:dslamType>3</v34:dslamType>
    </v34:dslamTypeAllowed>
    <v34:capability>
        <v34:technologyType>2</v34:technologyType>
        <v34:capabilityOverall>1</v34:capabilityOverall>
        <v34:capabilityHardware>2</v34:capabilityHardware>
        <v34:capabilityFirmware>1</v34:capabilityFirmware>
    </v34:capability>
    <v34:capability>
        <v34:technologyType>1</v34:technologyType>
        <v34:capabilityOverall>3</v34:capabilityOverall>
        <v34:capabilityHardware>0</v34:capabilityHardware>
        <v34:capabilityFirmware>2</v34:capabilityFirmware>
    </v34:capability>
    <v34:comment>Das ist ein Kommentar für CPE Info</v34:comment>
</v34:cpeInfo>
<v34:maxAccessSpeed>
    <v34:speedProfileNr>59</v34:speedProfileNr>
    <v34:description>50000/10000</v34:description>
    <v34:max>
        <v34:up>10000</v34:up>
        <v34:down>50000</v34:down>
    </v34:max>
    <v34:min>
        <v34:up>10000</v34:up>
        <v34:down>50000</v34:down>
    </v34:min>
    <v34:technologyType>1</v34:technologyType>
</v34:maxAccessSpeed>
<v34:averageFlag>1</v34:averageFlag>
<v34:nrOfWires>2</v34:nrOfWires>
<v34:fulfillmentTimeSlot>
    <v34:fulfillmentTimeSlotQualifIndex>1</v34:fulfillmentTimeSlotQualifIndex>
    <v34:fulfillmentTimeSlotStart>2017-05-
22T10:00:00.000+02:00</v34:fulfillmentTimeSlotStart>
    <v34:fulfillmentTimeSlotEnd>2017-05-
22T12:00:00.000+02:00</v34:fulfillmentTimeSlotEnd>
</v34:fulfillmentTimeSlot>
<v34:startPoint>
    <v34:taxRegion>64</v34:taxRegion>
    <v34:accessNet>BOL</v34:accessNet>
    <v34:unitType>3</v34:unitType>
    <v34:unitNumber>10000</v34:unitNumber>
    <v34:sse>1</v34:sse>
    <v34:contactType>1</v34:contactType>
    <v34:contactNr>62</v34:contactNr>
    <v34:upPreparation>1</v34:upPreparation>
</v34:startPoint>
<v34:address>
    <v34:street>Schönstrasse</v34:street>
    <v34:houseNr>1a</v34:houseNr>
    <v34:building>Chalet</v34:building>
    <v34:zip>307400</v34:zip>
    <v34:city>Hinterfultigen</v34:city>
</v34:address>
<v34:resourceAvailability>
    <v34:available>true</v34:available>
    <v34:resourceType>1</v34:resourceType>
</v34:resourceAvailability>
<v34:resourceAvailability>
    <v34:available>false</v34:available>
    <v34:resourceType>2</v34:resourceType>

```

```

11T00:00:00.000+01:00</v34:upgradePlanDateTime>
</v34:resourceAvailability>
<v34:qualifProfile>
  <v34:qualifIndex>10</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>260</v34:speedProfileNr>
    <v34:description>max2000/200</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>200</v34:up>
    <v34:down>2000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>11</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>268</v34:speedProfileNr>
    <v34:description>max2000/400</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>400</v34:up>
    <v34:down>2000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>12</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>268</v34:speedProfileNr>
    <v34:description>max2000/400</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>400</v34:up>
    <v34:down>2000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>12</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>268</v34:speedProfileNr>
    <v34:description>max2000/400</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>400</v34:up>
    <v34:down>2000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>

```

```

</v34:usedAccessSpeed>
<v34:serviceSpeed>
  <v34:speedProfileNr>203</v34:speedProfileNr>
  <v34:description>max5000/500</v34:description>
</v34:serviceSpeed>
<v34:effectiveSpeed>
  <v34:up>500</v34:up>
  <v34:down>5000</v34:down>
</v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>13</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>253</v34:speedProfileNr>
    <v34:description>max5000/1000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>1000</v34:up>
    <v34:down>5000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>14</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>255</v34:speedProfileNr>
    <v34:description>max8000/800</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>800</v34:up>
    <v34:down>8000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>15</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>

```

```

        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
        <v34:up>500</v34:up>
        <v34:down>5000</v34:down>
    </v34:min>
</v34:usedAccessSpeed>
<v34:serviceSpeed>
    <v34:speedProfileNr>256</v34:speedProfileNr>
    <v34:description>max8000/1600</v34:description>
</v34:serviceSpeed>
<v34:effectiveSpeed>
    <v34:up>1600</v34:up>
    <v34:down>8000</v34:down>
</v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>16</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>209</v34:speedProfileNr>
        <v34:description>max10000/1000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>1000</v34:up>
        <v34:down>10000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>17</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>258</v34:speedProfileNr>
        <v34:description>max10000/2000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>10000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>

```

```

<v34:qualifProfile>
  <v34:qualifIndex>18</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>207</v34:speedProfileNr>
    <v34:description>max15000/1500</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>1500</v34:up>
    <v34:down>15000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>19</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>261</v34:speedProfileNr>
    <v34:description>max15000/3000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>15000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>20</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>230</v34:speedProfileNr>

```

```

        <v34:description>max20000/2000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>21</v34:qualifIndex>
    <v34:nrOfWires>2</v34:nrOfWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>263</v34:speedProfileNr>
        <v34:description>max20000/4000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>22</v34:qualifIndex>
    <v34:nrOfWires>2</v34:nrOfWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>265</v34:speedProfileNr>
        <v34:description>max25000/2500</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>23</v34:qualifIndex>
    <v34:nrOfWires>2</v34:nrOfWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>

```

```

        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>266</v34:speedProfileNr>
        <v34:description>max25000/5000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>26</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>237</v34:speedProfileNr>
        <v34:description>max30000/3000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>25</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>267</v34:speedProfileNr>
        <v34:description>max30000/6000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>26</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>

```

```

<v34:usedAccessSpeed>
  <v34:speedProfileNr>170</v34:speedProfileNr>
  <v34:description>5000-18000/500-2000</v34:description>
  <v34:max>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:max>
  <v34:min>
    <v34:up>500</v34:up>
    <v34:down>5000</v34:down>
  </v34:min>
</v34:usedAccessSpeed>
<v34:serviceSpeed>
  <v34:speedProfileNr>260</v34:speedProfileNr>
  <v34:description>max40000/4000</v34:description>
</v34:serviceSpeed>
<v34:effectiveSpeed>
  <v34:up>2000</v34:up>
  <v34:down>18000</v34:down>
</v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>27</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>272</v34:speedProfileNr>
    <v34:description>max40000/8000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>28</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>262</v34:speedProfileNr>
    <v34:description>max50000/5000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>

```

```

        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>29</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>266</v34:speedProfileNr>
        <v34:description>max50000/10000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>30</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>270</v34:speedProfileNr>
        <v34:description>max60000/6000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>31</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>

```

```

        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>273</v34:speedProfileNr>
        <v34:description>max60000/12000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>32</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>271</v34:speedProfileNr>
        <v34:description>max80000/8000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>33</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>274</v34:speedProfileNr>
        <v34:description>max80000/16000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>34</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>

```

```

    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>264</v34:speedProfileNr>
    <v34:description>max100000/10000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>35</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>267</v34:speedProfileNr>
    <v34:description>max100000/20000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>36</v34:qualifIndex>
  <v34:nrofWires>2</v34:nrofWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>278</v34:speedProfileNr>
    <v34:description>max200000/20000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>

```

```

</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>37</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>276</v34:speedProfileNr>
    <v34:description>max200000/40000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>38</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>
    <v34:speedProfileNr>279</v34:speedProfileNr>
    <v34:description>max250000/25000</v34:description>
  </v34:serviceSpeed>
  <v34:effectiveSpeed>
    <v34:up>2000</v34:up>
    <v34:down>18000</v34:down>
  </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
  <v34:qualifIndex>39</v34:qualifIndex>
  <v34:nrOfWires>2</v34:nrOfWires>
  <v34:usedAccessSpeed>
    <v34:speedProfileNr>170</v34:speedProfileNr>
    <v34:description>5000-18000/500-2000</v34:description>
    <v34:max>
      <v34:up>2000</v34:up>
      <v34:down>18000</v34:down>
    </v34:max>
    <v34:min>
      <v34:up>500</v34:up>
      <v34:down>5000</v34:down>
    </v34:min>
  </v34:usedAccessSpeed>
  <v34:serviceSpeed>

```

```

        <v34:speedProfileNr>280</v34:speedProfileNr>
        <v34:description>max250000/50000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>40</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>281</v34:speedProfileNr>
        <v34:description>max300000/30000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>41</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>282</v34:speedProfileNr>
        <v34:description>max300000/60000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>42</v34:qualifIndex>
    <v34:nrofWires>2</v34:nrofWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>

```

```

        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>283</v34:speedProfileNr>
        <v34:description>max500000/50000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:qualifProfile>
    <v34:qualifIndex>43</v34:qualifIndex>
    <v34:nrOfWires>2</v34:nrOfWires>
    <v34:usedAccessSpeed>
        <v34:speedProfileNr>170</v34:speedProfileNr>
        <v34:description>5000-18000/500-2000</v34:description>
        <v34:max>
            <v34:up>2000</v34:up>
            <v34:down>18000</v34:down>
        </v34:max>
        <v34:min>
            <v34:up>500</v34:up>
            <v34:down>5000</v34:down>
        </v34:min>
    </v34:usedAccessSpeed>
    <v34:serviceSpeed>
        <v34:speedProfileNr>277</v34:speedProfileNr>
        <v34:description>max500000/100000</v34:description>
    </v34:serviceSpeed>
    <v34:effectiveSpeed>
        <v34:up>2000</v34:up>
        <v34:down>18000</v34:down>
    </v34:effectiveSpeed>
</v34:qualifProfile>
<v34:currentDnType>13</v34:currentDnType>
<v34:currentAccessSpeed>
    <v34:speedProfileNr>180</v34:speedProfileNr>
    <v34:description>5000-33000/500-10000</v34:description>
    <v34:max>
        <v34:up>10000</v34:up>
        <v34:down>33000</v34:down>
    </v34:max>
    <v34:min>
        <v34:up>500</v34:up>
        <v34:down>5000</v34:down>
    </v34:min>
    <v34:technologyType>1</v34:technologyType>
</v34:currentAccessSpeed>
<v34:llId>0030719875577</v34:llId>
<v34:jumperAction>false</v34:jumperAction>
<v34:potentialAvailable>1</v34:potentialAvailable>
<v34:reasonOfPotential>
    <v34:potential>
        <v34:potentialCode>1000</v34:potentialCode>
        <v34:potentialDescription>outstanding
upgrooming</v34:potentialDescription>
    </v34:potential>
    <v34:potential>
        <v34:potentialCode>1002</v34:potentialCode>
        <v34:potentialDescription>old CPE Hardware</v34:potentialDescription>
    </v34:potential>

```

```
        </v34:potential>
      </v34:reasonOfPotential>
    <v34:technologyType>1</v34:technologyType>
    <v34:lineState>1</v34:lineState>
    <v34:vectorized>false</v34:vectorized>
    <v34:siteDevelopment>
      <v34:fullyDeveloped>true</v34:fullyDeveloped>
      <v34:nrofBasicConnectivities>10</v34:nrofBasicConnectivities>
      <v34:nrofUtilisationUnits>20</v34:nrofUtilisationUnits>
    </v34:siteDevelopment>
    <v34:swisscomReady>true</v34:swisscomReady>
  </v34:qualifAnswer>
</v34:qualificationResult>
</v34:response>
</v34:srvQualifByNumberResponse>
</soapenv:Body>
</soapenv:Envelope>
```

3.3 Customer order creation

3.3.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v31="http://www.swisscom.com/wsg/bb/v31" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v31:createCustomerOrder>
      <v31:request correlationId="Regression WS Standalone">
        <v31:ispId>777710</v31:ispId>
        <v31:qualification>
          <v31:qualifNr>147109991</v31:qualifNr>
          <v31:qualifIndex>12</v31:qualifIndex>
          <v31:fulfillmentTimeSlotQualifIndex>1</v31:fulfillmentTimeSlotQualifIndex>
        </v31:qualification>
        <v31:creationType>1</v31:creationType>
        <v31:dnVnNsn>0719875577</v31:dnVnNsn>
        <v31:order xsi:type="v31:createType" correlationId="1">
          <v31:contrEleId>120</v31:contrEleId>
          <v31:extRef>Regression WS</v31:extRef>
          <v31:layer2>
            <v31:bbType>2</v31:bbType>
            <v31:sessionType>2</v31:sessionType>
          </v31:layer2>
          <v31:processWithLowPriority>false</v31:processWithLowPriority>
        </v31:order>
        <v31:order xsi:type="v31:addType" correlationId="2">
          <v31:contrEleId>100</v31:contrEleId>
          <v31:extRef>Regression SrvAdd Internet</v31:extRef>
          <v31:speedProfileNrReq>203</v31:speedProfileNrReq>
          <v31:processWithLowPriority>false</v31:processWithLowPriority>
        </v31:order>
      </v31:request>
    </v31:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.3.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v34:createCustomerOrderResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="Regression WS StandaloneAndInternet">
        <v34:success>true</v34:success>
        <v34:customerOrderNr>77771020170522000033000000</v34:customerOrderNr>
        <v34:nsn>0108728519</v34:nsn>
        <v34:orderItem correlationId="1">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170522000032000000</v34:orderNr>
        </v34:orderItem>
        <v34:orderItem correlationId="2">
          <v34:success>true</v34:success>
        </v34:orderItem>
      </v34:response>
    </v34:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```
<v34:orderNr>77771020170522000034000000</v34:orderNr>
</v34:orderItem>
</v34:response>
</v34:createCustomerOrderResponse>
</soapenv:Body>
</soapenv:Envelope>
```

3.3.3 GUI

The orders created are visible in the BBCS Access Service GUI:

77771020170522000034000000	SRV_ADD	COMPLETED	0108728519	22/05/2017	22/05/2017	22/05/2017 11:00	22/05/2017 13:00	22/05/2017 10:53:56.311	Best Effort	VDSL	Netservices number
77771020170522000032000000	BBCS_CREATE	COMPLETED	0108728519	22/05/2017	22/05/2017	22/05/2017 11:00	22/05/2017 13:00	22/05/2017 10:43:51.906	BBCS_Standalone	VDSL	Netservices number

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Detail Order																																				
Main Services CPE Info																																				
Order Info Order Type: BBCS_GETSTATUS Order State: COMPLETED Creation Type: New Response: - SI Exempt Prio: - Delivery Notification: -		DN Info DN / VN / NSN (Requested): 0719875577 DN (STNR) / VN / NSN: 0719875577 STNR DDI: - Dn Type: Economy Line																																		
ISP / Order Nr Info ISP: 7777110 Testaccount WSG Team Customer Order Nr: 77771920190502000019000000 Order Nr: 77771920190502000019000000 Order Group Nr: -		Date Info Customer Wish Date: 02/05/2016 Estimated Due Date/Time Start: 02/05/2016 00:00 Estimated Due Date/Time End: 02/05/2016 00:00 Termination Date: -																																		
WOS ID WOS ID (Requested): - WOS ID: -		Qualification Info Qualification Nr: - Qualification Index: - Fulfillment Time Slot Index: -																																		
References External Reference: Regression WG Internal Reference: -																																				
Layer 1 / Basis Contr Element: BBCS_en_TOM Level Of Supp: Standard																																				
Layer 2 BB Type: VDSL BB ADSL Emulated: No Session Type: DHCP Termination: @FWS Interleave Mode: Interleave Medium Pool Type: - Access Speed: 50000 down / 10000 up Access Speed Changed: - Op Status: Open Pipe Measure		Layer 2 / Cable Box UP Board Nr: 334 UP Switching Place Nr: 0 UP Type of Contact: UPK UP Contact Nr: 1 UP Coordinate X: - UP Coordinate Y: - BB Port: 04-540																																		
Layer 2 / Address / Starting Point Region: - Billing Zone: - Street, Nr, Building: - ZIP, City: - Starting Point: 64-BRE:3:334-0 Contact Type: 1 Contact Number: 1 BB Number Of Wires: 2 Reason of Potential: -																																				
Further Details Appointment Id: - Calculated max. Bitrate: - Measured max. Bitrate: - Appointment Date/Time: - Onsite Support: - Self Install: - Modem Owner: Unknown BB Access: -																																				
Comment Last Comment:																																				
History <table border="1"> <thead> <tr> <th>User name</th> <th>Order State</th> <th>DN (STNR) / VN / NSN</th> <th>Response</th> <th>Transaction Date/Time</th> <th>BB Type</th> <th>Speed Profile Nr</th> <th>Comment</th> <th>Customer Wish Date</th> <th>Estimated Due Date/Time Start</th> <th>Estimated Due Date/Time End</th> </tr> </thead> <tbody> <tr> <td>Pol</td> <td>COMPLETED</td> <td>0719875577</td> <td></td> <td>02/05/2016 10:30:05.550</td> <td>VDSL</td> <td></td> <td></td> <td>02/05/2016</td> <td>02/05/2016 00:00</td> <td>02/05/2016 00:00</td> </tr> <tr> <td>ISP User</td> <td>ENTERED</td> <td>0719875577</td> <td></td> <td>02/05/2016 10:30:05.550</td> <td></td> <td></td> <td></td> <td>02/05/2016</td> <td>02/05/2016 00:00</td> <td>02/05/2016 00:00</td> </tr> </tbody> </table>				User name	Order State	DN (STNR) / VN / NSN	Response	Transaction Date/Time	BB Type	Speed Profile Nr	Comment	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Pol	COMPLETED	0719875577		02/05/2016 10:30:05.550	VDSL			02/05/2016	02/05/2016 00:00	02/05/2016 00:00	ISP User	ENTERED	0719875577		02/05/2016 10:30:05.550				02/05/2016	02/05/2016 00:00	02/05/2016 00:00
User name	Order State	DN (STNR) / VN / NSN	Response	Transaction Date/Time	BB Type	Speed Profile Nr	Comment	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End																										
Pol	COMPLETED	0719875577		02/05/2016 10:30:05.550	VDSL			02/05/2016	02/05/2016 00:00	02/05/2016 00:00																										
ISP User	ENTERED	0719875577		02/05/2016 10:30:05.550				02/05/2016	02/05/2016 00:00	02/05/2016 00:00																										

3.3.4 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for “Fulfillment (BBCS Order)” which shows all notifications produced during the processing of the orders above.

3.4 Modification of Base Product (Access) and Addition of Streaming Service

Existing subscriptions can be modified to satisfy the new needs of a customer. In this example the Streaming service (TV) is added to an existing subscription. Note that this addition makes it necessary to modify the Base Product's session type to "DHCP" and the BB type to "VDSL". Please note you need to perform a qualification beforehand to create a modification.

3.4.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v34:createCustomerOrder>
      <v34:request correlationId="Regression WS change Type">
        <v34:ispId>777710</v34:ispId>
        <v34:creationType>1</v34:creationType>
        <v34:dnVnNsn>0719875577</v34:dnVnNsn>
        <v34:order xsi:type="v34:modifyType" correlationId="1">
          <v34:extRef>extRef RegressionWs modify Type</v34:extRef>
          <v34:layer2>
            <v34:bbType>2</v34:bbType>
            <v34:sessionType>2</v34:sessionType>
          </v34:layer2>
          <v34:processWithLowPriority>false</v34:processWithLowPriority>
        </v34:order>
        <v34:order xsi:type="v34:addType" correlationId="2">
          <v34:contrEleId>9</v34:contrEleId>
          <v34:extRef>extRef RegressionSrvTst</v34:extRef>
          <v34:speedProfileNrReq>0</v34:speedProfileNrReq>
          <v34:processWithLowPriority>false</v34:processWithLowPriority>
        </v34:order>
      </v34:request>
    </v34:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.4.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v34:createCustomerOrderResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="Regression WS change Type">
        <v34:success>true</v34:success>
        <v34:customerOrderNr>77771020170522000049000000</v34:customerOrderNr>
        <v34:orderItem correlationId="1">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170522000048000000</v34:orderNr>
        </v34:orderItem>
        <v34:orderItem correlationId="2">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170522000050000000</v34:orderNr>
        </v34:orderItem>
      </v34:response>
    </v34:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.4.3 GUI

The following Screenshots show the Service Status of a subscriber after both orders are completed:

Order Info Order Type BBCS_GETSTATUS Order State COMPLETED Creation Type New Response - SI Exempt Prio - Delivery Notification -				DN Info DN / VN / NSN (Requested) 0108410750 DN (STNR) / VN / NSN 0108410750 STNR DOI - Dn Type Netservices number				Current Endpoint DN Office 64BOL BB Device Location BOL Site BOL Site Category RUS Available Technology Type VDSL2, VDSL Vectoring DSLAM Name IPC-SUR710-S-DMA-04 Dslam Type CAN Technology Type VDSL2 Vectorized No			
ISP / Order Nr Info ISP 999999 OM Customer Order Nr 99999920170210000047000000 Order Nr 99999920170210000047000000 Order Group Nr -				Date Info Customer Wish Date 10/02/2017 Estimated Due Date/Time Start 10/02/2017 00:00 Estimated Due Date/Time End 10/02/2017 00:00 Termination Date -							
WOS ID WOS ID (Requested) - WOS ID -				Qualification Info Qualification Nr - Qualification Index - Fulfillment Time Slot Index -							
References External Reference - Internal Reference -											
Layer 1 / Basis Contr Element BBCS_Standalone Level Of Supp Standard											
Layer 2 (NPA/TBCO) BB Type VDSL BB ADSL Emulated No Session Type DHCP Termination @FWS Interleave Mode Interleave Low Pool Type pool1 Access Speed 50000 down / 10000 up Access Speed Changed - Op Status Open Pipe Manual				Layer 2 (APV) / Cable Box UP Board Nr 334 UP Switching Place Nr 0 UP Type of Contact UPK UP Contact Nr 1 UP Coordinate X 200100 UP Coordinate Y 600100 Jumper Action - BB Port 04-640				Layer 2 (LGS) / Address / Starting Point Region - Billing Zone - Street Nr Building - ZIP, City - Gaia Id 1238442 Starting Point 64-BOL-3-334-0 Contact Type 1 Contact Number 1 BB Number Of Wires 2 Reason of Potential 1000 - Pending upgrooming			
Further Details Appointment Id - Calculated max. Btrate - Measured max. Btrate -				Appointment Date/Time - Onsite Support - Self Install -				Modern Owner Unknown BB Access -			
Comment Last Comment ISP 777710 - Testaccount WSG Team											
History											
User name Order State DN (STNR) / VN / NSN Response Transaction Date/Time BB Type Speed Profile Nr Comment Customer Wish Date Estimated Due Date/Time Start Estimated Due Date/Time End											
Detail Pol COMPLETED 0108410750 10/02/2017 11:33:12.000 VDSL ISP 777710 - Testaccount WSG Team 10/02/2017 10/02/2017 00:00 10/02/2017 00:00											
Detail Swisscom SPOC ENTERED 0108410750 10/02/2017 11:33:11.559 10/02/2017 10/02/2017 00:00 10/02/2017 00:00											

3.4.4 Order Details

If, at any stage of the processing, the data retrieved via the Notification Service is not sufficient, then all of the order data can be retrieved by using the "getOrderDetail" operation of the Web service.

3.4.5 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.
See Appendix A: Notifications created for “Fulfillment (BBCS Order)” which shows all notifications produced during the processing of the orders above .

3.5 Change of Best Effort Service (Speed) and Reduction of Streaming Service

It is also possible to only change services and leave the Base Product as it is. The following example changes the speed of the Internet and removes the Streaming Service.

3.5.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v34:createCustomerOrder>
      <v34:request correlationId="Regression WS change Type">
        <v34:ispId>777710</v34:ispId>
        <v34:creationType>1</v34:creationType>
        <v34:dnVnNsn>0719875577</v34:dnVnNsn>
        <v34:order xsi:type="v34:changeType" correlationId="1">
          <v34:contrEleId>100</v34:contrEleId>
          <v34:extRef>extRef RegressionWs change Type</v34:extRef>
          <v34:speedProfileNrReq>209</v34:speedProfileNrReq>
        </v34:order>
        <v34:order xsi:type="v34:reduceType" correlationId="2">
          <v34:contrEleId>9</v34:contrEleId>
          <v34:extRef>extRef RegressionSrvTst</v34:extRef>
        </v34:order>
      </v34:request>
    </v34:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v34:createCustomerOrderResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="Regression WS change Type">
        <v34:success>true</v34:success>
        <v34:customerOrderNr>77771020170522000037000000</v34:customerOrderNr>
        <v34:orderItem correlationId="1">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170522000038000000</v34:orderNr>
        </v34:orderItem>
        <v34:orderItem correlationId="2">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170522000039000000</v34:orderNr>
        </v34:orderItem>
      </v34:response>
    </v34:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.2.1 GUI

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Detail Order			
Main Services CPE Info			
Order Info Order Type: BBSC_GETSTATUS Order State: COMPLETED Creation Type: New Response: - SF Exempt Prio: - Delivery Notification: -		DN Info DN / VN / NSN (Requested): 0719875577 DN (STNR) / VN / NSN: 0719875577 STNR DDI: - Dn Type: Economy Line Date Info Customer Wish Date: 02/05/2016 Estimated Due Date/Time Start: 02/05/2016 00:00 Estimated Due Date/Time End: 02/05/2016 00:00 Termination Date: -	
ISP / Order Nr Info ISP: 777710 Testaccount WSG Team Customer Order Nr: 77771020180502000100000000 Order Nr: 77771020180502000100000000 Order Group Nr: -		Current Endpoint DN Office: 04BRE BB Device Location: BRE Site: BRE Site Category: RUS Available Technology Type: VDSL Vectoring DSLAM Name: ipo-huq4w5-svid-01 Dslam Type: CAN Technology Type: VDSL Vectoring Vectorized: Yes	
WOS ID WOS ID (Requested): - WOS ID: -		Qualification Info Qualification Nr: - Qualification Index: - Fulfillment Time Slot Index: -	
References External Reference: - Internal Reference: -			
Layer 1 / Basis Contr Element: BBSC_on_TDM Level Of Supp: Standard			
Layer 2 BB Type: VDSL BB ADSL Emulated: No Session Type: DHCP Termination: @FWS Interleave Mode: Interleave Medium Pool Type: - Access Speed: 50000 down / 10000 up Access Speed Changed: - Op Status: Open Pipe Measure		Layer 2 / Cable Box UP Board Nr: 334 UP Switching Place Nr: 0 UP Type of Contact: UPK UP Contact Nr: 1 UP Coordinate X: - UP Coordinate Y: - BB Port: 04-540	
Layer 2 / Address / Starting Point Region: - Billing Zone: - Street, Nr, Building: - ZIP, City: - Starting Point: 04.BRE:3.334.0 Contact Type: 1 Contact Number: 1 BB Number Of Wires: 2 Reason of Potential: -			
Further Details Appointment Id: - Calculated max. Bitrate: - Measured max. Bitrate: -			
Comment Last Comment: -			

3.5.3 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for “Fulfillment (BBCS Order)” which shows all notifications produced during the processing of the orders above.

3.6 Change of Internet Service Provider

It is possible to change the internet service provider for a subscription. The following example shows a change of the ISP from 100008 to 777710. Note: a prior qualification is needed. See 3.2.

3.6.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
  <soapenv:Header/>
  <soapenv:Body>
    <v34:createCustomerOrder>
      <v34:request correlationId="Regression WS change ISP">
        <v34:ispId>777710</v34:ispId>
        <v34:creationType>1</v34:creationType>
        <v34:qualification>
          <v34:qualifNr>147110004</v34:qualifNr>
          <v34:qualifIndex>10</v34:qualifIndex>
        </v34:qualification>
        <v34:dnVnNsn>0108526259</v34:dnVnNsn>
        <v34:order xsi:type="v34:ispChangeType" correlationId="1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
          <v34:extRef>isptest</v34:extRef>
          <v34:customerWishDate>2017-02-10+02:00</v34:customerWishDate>
          <v34:comment>WS-Tutorial</v34:comment>
          <v34:layer2>
            <v34:bbType>2</v34:bbType>
            <v34:sessionType>2</v34:sessionType>
            <v34:termination>2</v34:termination>
            <v34:poolType>pool1</v34:poolType>
          </v34:layer2>
          <v34:selfInstall>1</v34:selfInstall>
          <v34:sla>
            <v34:sfSlaId>1</v34:sfSlaId>
            <v34:saSlaId>1</v34:saSlaId>
          </v34:sla>
        </v34:order>
      </v34:request>
    </v34:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
  <soapenv:Body>
    <v34:createCustomerOrderResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="Regression WS change ISP">
        <v34:success>true</v34:success>
        <v34:customerOrderNr>77771020170210000071000000</v34:customerOrderNr>
        <v34:orderItem correlationId="1">
          <v34:success>true</v34:success>
          <v34:orderNr>77771020170210000070000000</v34:orderNr>
        </v34:orderItem>
      </v34:response>
    </v34:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.3 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for “Fulfillment (BBCS Order)” which shows all notifications produced during the processing of the orders above.

3.7 Deprovisioning

If the BBCS subscription is no longer needed it can be deprovisioned as shown in the following example.

3.7.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v34="http://www.swisscom.com/wsg/bb/v34" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v34:createCustomerOrder>
      <v34:request correlationId="Regression WS Disconnect">
        <v34:ispId>100008</v34:ispId>
        <v34:creationType>1</v34:creationType>
        <v34:dnVnNsn>0339513544</v34:dnVnNsn>
        <v34:order xsi:type="v34:disconnectType" correlationId="disconn">
          <v34:extRef>Regression WS</v34:extRef>
        </v34:order>
      </v34:request>
    </v34:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.7.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v34:createCustomerOrderResponse xmlns:v34="http://www.swisscom.com/wsg/bb/v34">
      <v34:response correlationId="Regression WS Disconnect">
        <v34:success>true</v34:success>
        <v34:customerOrderNr>10000820170210000063000000</v34:customerOrderNr>
        <v34:orderItem correlationId="disconn">
          <v34:success>true</v34:success>
          <v34:orderNr>10000820170210000062000000</v34:orderNr>
        </v34:orderItem>
      </v34:response>
    </v34:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```


3.7.3 GUI

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Service Status

ISP 777710 Testaccount WSG Team

DN / VN / NSN * (0314445566)

Service Status

Operation failed

Message No broadband access or service found

3.8 Products, Restrictions and Dependencies

"Swisscom Wholesale" offers some products (also known as "Contract Elements") which can be ordered by an ISP/PTS. The description of these products/Contract Elements is available in the appropriate marketing documentation and also contains some business restrictions.

The following chapters give you an overview of the orderable products and some restrictions/dependencies which are important in the order process.

3.8.1 List of Contract Elements (Swisscom Wholesale Products)

CE-Id	Contract Element	CE-Type	possible BB-Types	mandatory Service	Add-on Services	Fulfillment SLA	Assurance SLA
110	BBCS-on-TDM	BBCS-Basis	ADSL, VDSL	Best Effort	Streaming, RealTime	Basic	Standard
120	BBCS-Standalone	BBCS-Basis	ADSL, VDSL, SDSL	Best Effort	Streaming (not SDSL); RealTime	Basic,	Standard
100	Best Effort	BBCS-Service	ADSL, VDSL, SDSL	n/a	n/a	Basic,	Standard, Plus *
9	Streaming	BBCS-Service (Add-on)	ADSL, VDSL	n/a	n/a	Premium	Intermediate, Plus
12	Real Time	BBCS-Service (Add-on)	ADSL, VDSL, SDSL	n/a	n/a	Basic	Standard
420	BBCS-F (Fiber)	BBCS-Basis	BX	Best Effort on Fiber	n/a	Basic	Standard
101	Best Effort on Fiber	BBCS-Service	BX	n/a	Attribut "Class-of-Service"	Basic	Standard, Plus *
19	Full-Access	FA (ULL)	(1 - 9)	n/a	n/a	Basic	Standard
22	Full-Access Subloop	FA (ULL)	(1 - 9)	n/a	n/a	Basic	Standard

* For the Contract-Element "Best Effort" the Fulfillment-SLA und the Assurance-SLA depend on the chosen service speed

3.8.2 Restrictions and Dependencies

- a) The BBCS copper basis products "BBCS-on-TDM" and "BBCS-Standalone" must always be provisioned with the BBCS service product "Best Effort".
- b) The BBCS base product is without any BBCS service product is known as "Bit-Stream-Access" and cannot be ordered via B2B interface.
- c) The BBCS BB-Type "SDSL" is only possible on "BBCS-Standalone" (not possible on "BBCS-on-TDM").
- d) The BBCS add-on services "Streaming (TV)" and "realtime" require a session type "DHCP" and a termination "@FWS" which must be implemented (created or modified) on the base service (If using only the "Best Effort" service, the usual session type is "PPP" and the termination is "@ISP").
- e) The BBCS fiber base product "BBCS-F" is only possible with the BB-type "BX" and the session type "DHCP" and requires the mandatory (and only possible) service "Best Effort on Fiber"; this service can be provided with "Class-of-Service" which enables the ISP/PTS to implement its own "add-on services".
- f) The ULL (unbundling local loop) products "Full-Access" and "Full-Access Subloop" are layer 1 only implementations which cannot have any services.

4 Fulfillment (ULL Orders)

For a detailed interface definition see [5].

For a process overview see chapter 3.1.

4.1 Qualification

The qualification delivers the capabilities (e.g. available speeds) of a location and should be used to determine if a certain service can be ordered at that location. The following example shows a qualification for an address without Full Access

4.1.1 Request

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>???Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v12:qualifyByAddress>
      <v12:request correlationId="--- WS faQualifyByAddress">
        <v12:ptsId>777710</v12:ptsId>
        <!--1 or more repetitions:-->
        <v12:contrEleId>19</v12:contrEleId>
        <!--Optional:-->
        <v12:poaFaId?</v12:poaFaId>
        <!--Optional:-->
        <!-- <v12:appointmentId>123123</v12:appointmentId>-->
        <!--Optional:-->
        <v12:customerWishDateTime>2010-12-08T15:58:01+02:00</v12:customerWishDateTime>
        <!--Optional:-->
        <v12:extRef>Regr Test FA QualifByAddr</v12:extRef>
        <!--1 or more repetitions:-->
        <v12:faTechnology>1</v12:faTechnology>
        <v12:faTechnology>2</v12:faTechnology>
        <v12:faBusinessCase>1</v12:faBusinessCase>
        <!--Optional:-->
        <v12:lineState>1</v12:lineState>
        <v12:address>
          <!--Optional:-->
          <v12:street>Street</v12:street>
          <!--Optional:-->
          <v12:houseNr>12</v12:houseNr>
          <!--Optional:-->
          <v12:building>Building</v12:building>
          <!--Optional:-->
          <v12:zip>4004</v12:zip>
          <!--Optional:-->
          <v12:city>City</v12:city>
          <!--Optional:-->
          <v12:firstName>First Name</v12:firstName>
          <!--Optional:-->
          <v12:lastName>Last Name</v12:lastName>
        </v12:address>
      </v12:request>
    </v12:qualifyByAddress>
  </soapenv:Body>
</soapenv:Envelope>
```

```

    </v12:address>
  </v12:request>
</v12:qualifyByAddress>
</soapenv:Body>
</soapenv:Envelope>

```

4.1.2 Response

```

<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v12:qualifyByAddressResponse xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
      <v12:response correlationId="--- WS faQualifyByAddress">
        <v12:success>true</v12:success>
        <v12:qualifResult>
          <v12:qualifNr>147109942</v12:qualifNr>
          <v12:contrEleId>19</v12:contrEleId>
          <v12:qualifAnswer>
            <v12:qualiResultState>ok</v12:qualiResultState>
            <v12:qualifIndex>1</v12:qualifIndex>
            <v12:faTechnology>1</v12:faTechnology>
            <v12:address>
              <v12:street>Schönstrasse</v12:street>
              <v12:houseNr>1a</v12:houseNr>
              <v12:building>Chalet</v12:building>
              <v12:zip>307400</v12:zip>
              <v12:city>Aarau</v12:city>
              <v12:firstName>Hans</v12:firstName>
              <v12:lastName>Müller</v12:lastName>
            </v12:address>
            <v12:startPoint>
              <v12:taxRegion>62</v12:taxRegion>
              <v12:accessNet>MOR</v12:accessNet>
              <v12:unitType>3</v12:unitType>
              <v12:unitNumber>10000</v12:unitNumber>
              <v12:sse>1</v12:sse>
              <v12:contactType>1</v12:contactType>
              <v12:contactNr>62</v12:contactNr>
            </v12:startPoint>
            <v12:endPoint>
              <v12:taxRegion>62</v12:taxRegion>
              <v12:accessNet>MOR</v12:accessNet>
              <v12:site>MORS</v12:site>
              <v12:siteCategory>6</v12:siteCategory>
              <v12:bbDeviceLocation>MOR</v12:bbDeviceLocation>
            </v12:endPoint>
            <v12:lineLength>
              <v12:correction>4</v12:correction>
              <v12:segment04>493</v12:segment04>
              <v12:segment05>0</v12:segment05>
              <v12:segment06>368</v12:segment06>
              <v12:segment08>0</v12:segment08>
              <v12:segment10>0</v12:segment10>
            </v12:lineLength>
            <v12:cableSize>400</v12:cableSize>
            <v12:lineState>1</v12:lineState>
            <v12:fulfillmentTimeSlot>
              <v12:fulfillmentTimeSlotQualifIndex>1</v12:fulfillmentTimeSlotQualifIndex>
              <v12:fulfillmentTimeSlotStart>2016-10-16T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
              <v12:fulfillmentTimeSlotEnd>2016-10-16T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
            </v12:fulfillmentTimeSlot>
          </v12:qualifAnswer>
        </v12:qualifResult>
      </v12:response>
    </v12:qualifyByAddressResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

```

        <v12:fulfillmentTimeSlotQualifIndex>2</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
17T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
17T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
        </v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>3</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
18T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
18T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
        </v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>4</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
19T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
19T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
        </v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>5</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
20T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
20T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
        </v12:fulfillmentTimeSlot>
        <v12:currentDnType>1</v12:currentDnType>
    </v12:qualifAnswer>
</v12:qualifResult>
<v12:qualifResult>
    <v12:qualifNr>147109942</v12:qualifNr>
    <v12:contrEleId>19</v12:contrEleId>
    <v12:qualifAnswer>
        <v12:qualiResultState>ok</v12:qualiResultState>
        <v12:qualifIndex>2</v12:qualifIndex>
        <v12:faTechnology>2</v12:faTechnology>
        <v12:address>
            <v12:street>Schönstrasse</v12:street>
            <v12:houseNr>1a</v12:houseNr>
            <v12:building>Chalet</v12:building>
            <v12:zip>307400</v12:zip>
            <v12:city>Aarau</v12:city>
            <v12:firstName>Hans</v12:firstName>
            <v12:lastName>Müller</v12:lastName>
        </v12:address>
        <v12:startPoint>
            <v12:taxRegion>62</v12:taxRegion>
            <v12:accessNet>MOR</v12:accessNet>
            <v12:unitType>3</v12:unitType>
            <v12:unitNumber>10000</v12:unitNumber>
            <v12:sse>1</v12:sse>
            <v12:contactType>1</v12:contactType>
            <v12:contactNr>62</v12:contactNr>
        </v12:startPoint>
        <v12:endPoint>
            <v12:taxRegion>62</v12:taxRegion>
            <v12:accessNet>MOR</v12:accessNet>
            <v12:site>MORS</v12:site>
            <v12:siteCategory>6</v12:siteCategory>
            <v12:bbDeviceLocation>MOR</v12:bbDeviceLocation>
        </v12:endPoint>
        <v12:lineLength>
            <v12:correction>4</v12:correction>
            <v12:segment04>493</v12:segment04>

```

```

        <v12:segment05>0</v12:segment05>
        <v12:segment06>368</v12:segment06>
        <v12:segment08>0</v12:segment08>
        <v12:segment10>0</v12:segment10>
    </v12:lineLength>
    <v12:cableSize>400</v12:cableSize>
    <v12:lineState>1</v12:lineState>
    <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>6</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
16T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
16T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
    </v12:fulfillmentTimeSlot>
    <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>7</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
17T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
17T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
    </v12:fulfillmentTimeSlot>
    <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>8</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
18T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
18T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
    </v12:fulfillmentTimeSlot>
    <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>9</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
19T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
19T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
    </v12:fulfillmentTimeSlot>
    <v12:fulfillmentTimeSlot>
        <v12:fulfillmentTimeSlotQualifIndex>10</v12:fulfillmentTimeSlotQualifIndex>
        <v12:fulfillmentTimeSlotStart>2016-10-
20T12:12:00.000+02:00</v12:fulfillmentTimeSlotStart>
        <v12:fulfillmentTimeSlotEnd>2016-10-
20T14:12:00.000+02:00</v12:fulfillmentTimeSlotEnd>
    </v12:fulfillmentTimeSlot>
    <v12:currentDnType>1</v12:currentDnType>
</v12:qualifAnswer>
</v12:qualifResult>
</v12:response>
</v12:qualifyByAddressResponse>
</soapenv:Body>
</soapenv:Envelope>

```

4.2 Creating a Full Access subscription

After the successful qualification, the order for the desired BBCS subscription can be sent to WSG. The following example shows an order for a Full Access. Note the reference to the qualification result of the previous interaction with WSG. (Chapter 4.1)

4.2.1 Request

```
<?xml version="1.0" encoding="iso-8859-1"?>
```

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>???

```

4.2.2 Response

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v12:createResponse xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
      <v12:response correlationId="--- WS faCreate">
        <v12:success>true</v12:success>
        <v12:orderNr>77771020160930000057000000</v12:orderNr>
      </v12:response>
    </v12:createResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

4.2.3 GUI

The order is visible in the WSG Full Access GUI:

Order Nr	Order Type	Order State	DN / VN / NSN	POA FA Id	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Timestamp	Contract Element	FA Technology	FA Device Location	DN Office	Region	External Reference
Detail 77771020130715000094000000	ACCESS_CREATE	PROCESSING	0108555261 ?		15/07/2013	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	Full Access (TAL)	Classical ADSL	MOR	62MOR	Central	

The following Screenshots show the Service Status of the subscriber after the order is completed:

Detail Order

Main Detail

PTS	777710 Testaccount Peter Rosenberger	Internal Reference	ISP-driven ORDER
Order Nr	7777102013071500009400000	External Reference	-
DN / VN / NSN (Requested)	0108555261	DN (STNR) / VN / NSN	0108555261
STNR DDI	-	DN Type	-
Qualification Nr	8666423	Qualification Index	1
Order Type	ACCESS_CREATE	POA FA Id	?
Order State	PROCESSING	Response	-
DN Office	62MOR	FA Device Location	MOR
Contract Element	Full Access (TAL)	FA Technology	classical ADSL
Customer Wish Date	15/07/2013 00:00	Estimated Due Date/Time Start	29/07/2013 12:12
Last modified	15/07/2013 13:29:20.837 Pol	Termination Date	-
Comment	-	FA Port Nr (requested)	1
Contact Person Name	SOAP UI	Contact Person Phone	0793143367

History

User name	Order State	DN (STNR) / VN / NSN	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Date/Time	FA Technology	Comment	Response
Pol	PROCESSING	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	classical ADSL		
Batch	CHECKED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.135	classical ADSL		
Batch	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:20.790	classical ADSL		
HP Tester	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:12.332	classical ADSL		

Detail Order

Main Detail

Address / Starting Point Region Central Billing Zone - Street, Nr, Building Schönstrasse, 1a, Chalet ZIP, City 307400, Gümliigen Starting Point 62;MOR;3;10000;0 Contact Type 1 Contact Number 62 Number of Wires 2 wires	Cable Box UP Board Nr - UP Switching Place Nr - UP Type of Contact - UP Contact Nr - UP Coordinate X - UP Coordinate Y -	Further Details SG-MM - CPE Owner - Delivery Notification - BB Access - BB Port 1 Effective Speed - Calculated max. Bitrate - Measured max. Bitrate -
Qualification Request First Name First Name Last Name Last Name Building Building Street Street House Nr 12 ZIP 4004 City City		

History

User name	Order State	DN (STNR) / VN / NSN	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Date/Time	FA Technology	Comment	Response
Pol	PROCESSING	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	classical ADSL		
Batch	CHECKED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.135	classical ADSL		
Batch	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:20.790	classical ADSL		
HP Tester	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:12.332	classical ADSL		

4.3 Modification of a Full Access description

Existing subscriptions can be modified to satisfy the new needs of a customer. In this Example the technology is changed from classical ADSL to VDSL

4.3.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:V9="http://www.swisscom.com/wsg/fa/V10">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
```

```

    <wsse:UsernameToken>
      <wsse:Username>???

```

4.3.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <modifyPendingResponse xmlns="http://www.swisscom.com/wsg/fa/V10">
      <response correlationId="Regr Test faModifyPending">
        <success>true</success>
        <extRef>WS faModifyPend</extRef>
        <orderNr>77771020111021000171000000</orderNr>
      </response>
    </modifyPendingResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

shows all notifications produced during the processing of the orders above.

4.4 Disconnection of a Full Access subscription

If the BBCS subscription is no longer needed it can be deprovisioned as shown in the following example

4.4.1 Request

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>???

```

4.4.2 Response

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v12:disconnectResponse xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
      <v12:response correlationId="Regr Test Disconnect">
        <v12:success>true</v12:success>
        <v12:orderNr>77771020160930000059000000</v12:orderNr>
      </v12:response>
    </v12:disconnectResponse>
  </soapenv:Body>
</soapenv:Envelope>
```


5 Assurance (BBCS Trouble Ticket)

For a detailed interface definition see[4].

5.1 Process Overview

The following picture shows the interactions between the ISP's assurance system and WSG:

- 1 xDSL Info**
ISP: Checks the current status of a subscription.
WSG: The response shows information about the subscription including line measurement data.
- 2 Trouble Ticket Creation**
ISP: A trouble ticket is sent to WSG.
WSG: WSG confirms the receipt of the trouble ticket.
- 3 Trouble Ticket Status**
ISP: The ISP can request information about the trouble ticket status at any time.
WSG: WSG returns the details of the trouble ticket.
- 4 Notifications**
ISP: The ISP can retrieve notifications about the progress of the trouble ticket processing for which he has subscribed.
WSG: The notifications that were created during the processing of the trouble ticket are returned.

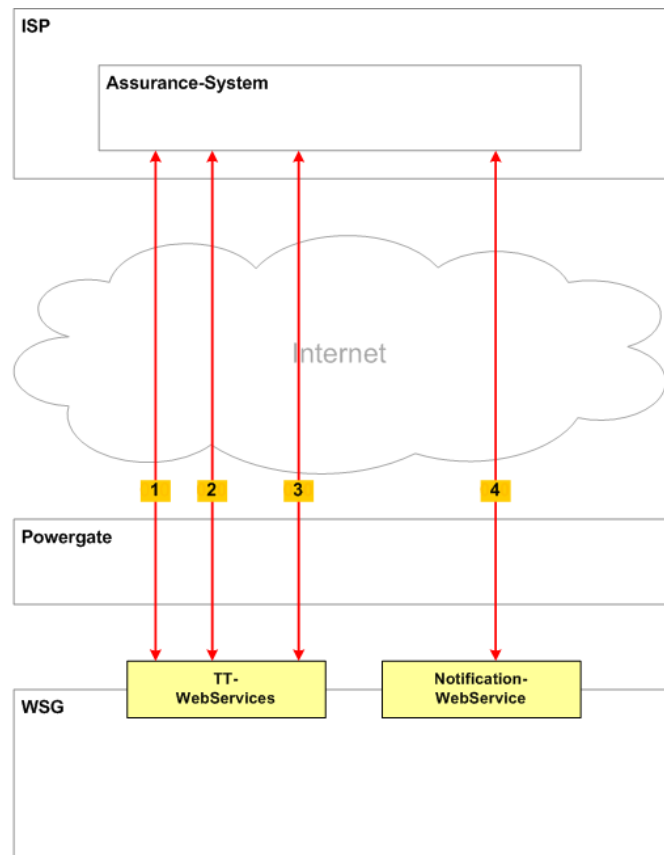

5.2 Creation of a Trouble Ticket

If an existing BBCS subscription does not work (any more) a trouble ticket can be submitted as shown in the following example.

5.2.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v28:createTroubleTicket>
      <v28:request correlationId="createTroubleTicket">
        <v28:ispId>777710</v28:ispId>
        <v28:ispTtRef>WS TEST 1</v28:ispTtRef>
        <v28:ispPhoneNr>0584443593</v28:ispPhoneNr>
        <v28:endUser>
          <v28:street>Schorenstrasse</v28:street>
          <v28:houseNr>68e</v28:houseNr>
          <v28:building>1a</v28:building>
          <v28:zip>3000</v28:zip>
          <v28:city>Bern</v28:city>
          <v28:endUserName>EndUserName</v28:endUserName>
          <v28:endUserLogin>REndUserLogin</v28:endUserLogin>
          <v28:endUserPhoneNr>0794140424</v28:endUserPhoneNr>
        </v28:endUser>
        <v28:contactInfo>
          <v28:firstName>Hans</v28:firstName>
          <v28:lastName>Meier</v28:lastName>
          <v28:phoneNr>0313220133</v28:phoneNr>
          <v28:notificationType>Sms</v28:notificationType>
          <v28:notificationAddress>im Haus</v28:notificationAddress>
        </v28:contactInfo>
        <v28:dnVnNsn>0108542092</v28:dnVnNsn>
        <v28:dnType>13</v28:dnType>
        <v28:bbType>2</v28:bbType>
        <v28:stnrDdi/>
        <v28:problemDescription>any Problem with somewhat reason</v28:problemDescription>
        <v28:problemDateTime>2009-09-01T09:30:47.0+02:00</v28:problemDateTime>
        <v28:lastLoginDateTime>2009-09-01T08:30:47.0+02:00</v28:lastLoginDateTime>
        <v28:comment>any comment</v28:comment>
        <v28:serviceProblem>
          <v28:contrEleId>100</v28:contrEleId>
          <v28:serviceSpeedProfileNr>248</v28:serviceSpeedProfileNr>
          <v28:bbcsEquipment>Equipment</v28:bbcsEquipment>
          <v28:errorCategory>541</v28:errorCategory>
        </v28:serviceProblem>
        <v28:endUserNotificationType>Email</v28:endUserNotificationType>
        <v28:endUserNotificationAddress>WS TEST Notif Addr</v28:endUserNotificationAddress>
        <v28:ispApplicationId>100900</v28:ispApplicationId>
        <v28:ispApplicationEntityId/>
        <v28:measuredIspValues>Measurements ISP</v28:measuredIspValues>
        <v28:saSlaRequested>1</v28:saSlaRequested>
      </v28:request>
    </v28:createTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>
```



WSG B2B Web Service Tutorial C1 - Public

```
</soapenv:Body>  
</soapenv:Envelope>
```

5.2.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v28:createTroubleTicketResponse xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
      <v28:response correlationId="">
        <v28:success>true</v28:success>
        <v28:ttIdWsg>2447601</v28:ttIdWsg>
        <v28:ttState>1</v28:ttState>
        <v28:dnType>13</v28:dnType>
        <v28:bbType>2</v28:bbType>
      </v28:response>
    </v28:createTroubleTicketResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

5.2.3 GUI

Access Trouble Ticket Detail			
Main	xDSL Info	Response	Billing
Ticket Header Ticket ID 2447601 Ticket ID Sys SIM1232447601 Entered 12/07/2017 13:11 Closed 22/03/2010 11:11 Last modified 12/07/2017 13:12 by Pol TT State CLOSED Suspended No			
SLA Contr Element Best Effort SA SLA Intermediate SA SLA (Requested) - SA SLA (Calculated) Intermediate SA SLA Overruled No			
Checklist Problem Date/Time 01/09/2009 09:30 Last successful login 01/09/2009 08:30 TT Error Category 541 - No Signal			
DN Info DN / VN / NSN 0108542092 DN / VN / NSN (Requested) 0108542092		ISP ISP 777710 Testaccount WSG Team ISP phone 0584443593 ISP ticket ref. WS_TEST_1 ISP Application ID 100900 ISP Application Entity ID -	
Current Endpoint DN Office 64BOL BB Device Location BOL Site BOL Site Category RUS DSLAM Name IPC-HIR710-S-DM-11 Dslam Type CAN Available Technology Type VDSL Vectoring		End User End User Login REndUserLogin End User Name EndUserName End User Phone 0794140424 End User Company - End User Street/Nr Schorenstrasse 68e Building 1a End User ZIP/City 3000 Bern	
Connection BBBS connection type Netservices number BB Type VDSL BB ADSL Emulated No Speed Profile Nr max 2M down / 400k up Service Profile (Requested) max 2M down / 400k up Op Status Open Pipe Measure Technology Type VDSL2 Vectorized No Reason of Potential -		Contact Info Contact Person First Name Hans Contact Person Last Name Meier Contact Person Phone 0313220133 Contact Notification Type SMS Contact Notification Email/SMS-Nr im Haus	
Fiber Info OTO Id - OTO Plug Nr - OTO Partner Label - BEP Site Category -		Site Development Fully Developed - Nr of Utilisation Units - Nr of Basic Connectivities -	
Problem description any Problem with somewhat reason			
Comment any comment			
Measured ISP Values Measurements ISP			

5.2.4 Trouble Ticket Detail

If, at any stage of the processing, the data retrieved via the Notification Service is not sufficient, then all the data of order can be retrieved by using the “getDetailBbcsTroubleTicket” operation of the Web service.

Appendix C: getDetail BBcs TroubleTicket shows an example of the data that can be retrieved.

5.2.5 Notifications

During the whole processing, the trouble tickets can be tracked by retrieving notifications from the Notification Service.

See 8 Appendix B: Notifications created for “Assurance (BBcs Trouble Ticket)” shows all notifications produced during the processing of the TT above

5.3 Trouble Ticket Types and Restrictions

- For BBcs copper lines, a trouble ticket is only possible on one of the implemented services ("BestEffort", "Streaming" or "RealTime"); you cannot create a trouble ticket for a BBcs base Contract Element.
- For BBcs fiber lines no trouble tickets are possible in WSG.
- For ULL lines ("Full-Access" or "Full-Access Subloop") a trouble ticket can be created on this service itself

5.4 AccessProfile modification

You have the possibility to check the valid access Profiles for a defined line and to modify them.

5.4.1 getValidAccessProfiles

5.4.1.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v28:getValidAccessProfilesRequest>
      <v28:request correlationId="getValidAccessProfiles">
        <v28:ispId>777710</v28:ispId>
        <v28:dnVnNsn>0108728519</v28:dnVnNsn>
      </v28:request>
    </v28:getValidAccessProfilesRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

5.4.1.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v28:getValidAccessProfilesResponse xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
      <v28:response correlationId="getValidAccessProfiles">
        <v28:success>true</v28:success>
      </v28:response>
    </v28:getValidAccessProfilesResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>33</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>33</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>33</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>34</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>158</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>168</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
    
```

```

        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>

```

```

    <v28:technologyType>1</v28:technologyType>
  </v28:validAccessProfile>
</v28:validAccessProfile>
  <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>157</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>160</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>28</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>175</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
    
```

```

        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>169</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
    </v28:validAccessProfile>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>55</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>176</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
    </v28:validAccessProfile>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>161</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>156</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
    </v28:validAccessProfile>

```

```

        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>177</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>162</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>29</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>31</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>184</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>

```

```

        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>178</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>170</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>56</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>164</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
    
```

```

        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>227</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
    </v28:validAccessProfile>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>30</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>41</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
    </v28:validAccessProfile>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>179</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>60</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
    </v28:validAccessProfile>

```

```

        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>182</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
    </v28:validAccessProfile>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>63</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>172</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>57</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>226</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
    
```

```

        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>166</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>4</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>35</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>186</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
    </v28:validAccessProfile>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>167</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>36</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>6</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>180</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>

```

```

        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
    </v28:validAccessProfile>

```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>5</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>61</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>6</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>173</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>58</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
    </v28:validAccessProfile>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>181</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>4</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>62</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>5</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>

```

```

        <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>174</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
    </v28:validAccessProfile>

```

```

        <v28:interleaveMode>3</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>4</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>5</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>59</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>6</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
    
```

```

        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>187</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>3</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>

```

```

<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>188</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>3</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>189</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>189</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>189</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>190</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>190</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>190</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>513</v28:accessSpeedProfileNr>

```

```

        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>513</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>513</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>514</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>514</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>514</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>509</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>509</v28:accessSpeedProfileNr>
        <v28:psdClass>20</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>509</v28:accessSpeedProfileNr>
        <v28:psdClass>30</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>
        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
    <v28:validAccessProfile>
        <v28:accessSpeedProfileNr>511</v28:accessSpeedProfileNr>
        <v28:psdClass>10</v28:psdClass>
        <v28:interleaveMode>2</v28:interleaveMode>

```

```

        <v28:bbType>2</v28:bbType>
        <v28:technologyType>1</v28:technologyType>
    </v28:validAccessProfile>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>511</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>511</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>515</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>515</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>515</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>510</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>510</v28:accessSpeedProfileNr>
    <v28:psdClass>20</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>510</v28:accessSpeedProfileNr>
    <v28:psdClass>30</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
    <v28:accessSpeedProfileNr>512</v28:accessSpeedProfileNr>
    <v28:psdClass>10</v28:psdClass>
    <v28:interleaveMode>2</v28:interleaveMode>
    <v28:bbType>2</v28:bbType>
    <v28:technologyType>1</v28:technologyType>

```

```

</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>512</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>512</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>516</v28:accessSpeedProfileNr>
  <v28:psdClass>10</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>516</v28:accessSpeedProfileNr>
  <v28:psdClass>20</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
<v28:validAccessProfile>
  <v28:accessSpeedProfileNr>516</v28:accessSpeedProfileNr>
  <v28:psdClass>30</v28:psdClass>
  <v28:interleaveMode>2</v28:interleaveMode>
  <v28:bbType>2</v28:bbType>
  <v28:technologyType>1</v28:technologyType>
</v28:validAccessProfile>
</v28:response>
</v28:getValidAccessProfilesResponse>
</soapenv:Body>
</soapenv:Envelope>

```

5.4.2 modifyAccessProfile

5.4.2.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v28:modifyAccessProfileRequest>
      <v28:request correlationId="anyCorrelation">
        <v28:ispId>777710</v28:ispId>
        <v28:dnVnNsn>0762290309</v28:dnVnNsn>
        <v28:accessSpeedProfileNr>33</v28:accessSpeedProfileNr>
        <!--Optional:-->

```

```
        <v28:psdClass>20</v28:psdClass>
      </v28:request>
    </v28:modifyAccessProfileRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

5.4.2.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v28:modifyAccessProfileResponse xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
      <v28:response correlationId="anyCorrelation">
        <v28:success>true</v28:success>
        <v28:orderNr>77771020150730000006000000</v28:orderNr>
      </v28:response>
    </v28:modifyAccessProfileResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

6 Voice Messages

Voice Messages can be used to detect if a subscriber has to be modified because of change to its voice service. If for example the subscriber moves to a new location, the BBCS subscription has to be modified too. In this case WSG automatically creates the necessary orders based on the Voice Messages.

6.1 GUI

The following Screenshots show the notifications created for the Voice Messages and the resulting Orders:

Notification Maintenance

Back

Refresh

Number Of Entries: 30

[First/Prev] 1, 2 [Next/Last]

	Notification ID	ISP ID	Object	Object Type	Initiator	Activator	Object State	Object Step	Event	Transaction Date/Time
Detail	16622066	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	PONR	Order Notification	26.10.2010 13:32:00
Detail	16622065	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	PONR	Order Notification	26.10.2010 13:32:00
Detail	16622064	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	Order Confirmation	Order Notification	26.10.2010 13:28:00
Detail	16622063	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	Order Confirmation	Order Notification	26.10.2010 13:27:00
Detail	16622062	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	ACCEPTED		Classical Notification	26.10.2010 13:23:00
Detail	16622061	777710	BBCS-Order	BBCS_CREATE	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622060	777710	BBCS-Order	BBCS_CREATE	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622059	777710	BBCS-Order	BBCS_CREATE	SCS	Order	CHECKED		Order Notification	26.10.2010 13:22:00
Detail	16622058	777710	BBCS-Order	BBCS_CREATE	SCS	Order	CHECKED		Order Notification	26.10.2010 13:22:00
Detail	16622057	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622056	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	CHECKED		Order Notification	26.10.2010 13:21:00
Detail	16622055	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:20:00
Detail	16622054	777710	BBCS-Order	SRV_ADD	SCS	Order	HOLDING		Order Notification	26.10.2010 13:20:00
Detail	16622053	777710	BBCS-Order	SRV_ADD	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622052	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622051	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622050	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622049	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622048	777710	BBCS-Order	SRV_ADD	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622047	777710	BBCS-Order	SRV_ADD	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00

[First/Prev] 1, 2 [Next/Last]

Notification Maintenance

[Back](#)
[Refresh](#)

Number Of Entries: 30

[First/Prev] 1, 2 [Next/Last]

	Notification ID	ISP ID	Object	Object Type	Initiator	Activator	Object State	Object Step	Event	Transaction Date/Time
Detail	16622046	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00
Detail	16622045	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00
Detail	16622044	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622043	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622042	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622041	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:41
Detail	16622040	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:41
Detail	16622039	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40
Detail	16622038	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40
Detail	16622037	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40

[First/Prev] 1, 2 [Next/Last]

6.2 Notifications

During the whole processing, the voice messages and orders can be tracked by retrieving notifications from the Notification Service.

7 Appendix A: Notifications created for “Fulfillment (BBCS Order)”

7.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:request>
        <v20:ispId>777710</v20:ispId>
        <v20:object>1</v20:object>
        <v20:notificationIdFrom>137743972</v20:notificationIdFrom>
      </v20:request>
    </v20:getNotification>
  </soapenv:Body>
</soapenv:Envelope>
```

7.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:response>
        <v20:success>true</v20:success>
        <v20:limitReached>false</v20:limitReached>
        <v20:notification>
          <v20:notificationId>137744007</v20:notificationId>
          <v20:notificationDateTime>2017-05-22T10:32:50.426+02:00</v20:notificationDateTime>
          <v20:notificationEvent>1</v20:notificationEvent>
          <v20:object>1</v20:object>
          <v20:objectType>1</v20:objectType>
          <v20:initiator>1</v20:initiator>
          <v20:activator>1</v20:activator>
          <v20:objectState>1</v20:objectState>
          <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:extRef>Regression WS</v20:extRef>
            <v20:contrEleId>120</v20:contrEleId>
            <v20:orderType>1</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
            22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
            22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
          </v20:bbcsOrder>
        </v20:notification>
      </v20:notification>
    </v20:getNotificationResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

</v20:notificationEvent>1</v20:notificationEvent>
<v20:object>1</v20:object>
<v20:objectType>13</v20:objectType>
<v20:initiator>1</v20:initiator>
<v20:activator>1</v20:activator>
<v20:objectState>1</v20:objectState>
<v20:bbcsOrder>
  <v20:orderNr>77771020170522000034000000</v20:orderNr>
  <v20:dnVnNsn>0108728519</v20:dnVnNsn>
  <v20:extRef>Regression SrvAdd Internet</v20:extRef>
  <v20:contrEleId>100</v20:contrEleId>
  <v20:orderType>13</v20:orderType>
  <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
  <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
  <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
  <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
  <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  <v20:speedProfileNr>203</v20:speedProfileNr>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744009</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:34:43.723+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>1</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000032000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:extRef>Regression WS</v20:extRef>
    <v20:contrEleId>120</v20:contrEleId>
    <v20:orderType>1</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>13</v20:dnType>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
  </v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744010</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:36:06.367+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000032000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
    <v20:extRef>Regression WS</v20:extRef>
    <v20:contrEleId>120</v20:contrEleId>
  </v20:bbcsOrder>
</v20:notification>

```

```

        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool12</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744011</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:36:06.514+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>5</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool12</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744012</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:37:13.285+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>2</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000036000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
        <v20:contrEleId>110</v20:contrEleId>
        <v20:orderType>2</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744013</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:38:49.073+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000036000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>1</v20:dnType>
                <v20:opStatus>2</v20:opStatus>
                <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:psdClass>20</v20:psdClass>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744014</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:39:29.764+02:00</v20:notificationDateTime>
            <v20:notificationEvent>2</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>1</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>6</v20:objectState>
            <v20:objectStep>4</v20:objectStep>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000032000000</v20:orderNr>
                <v20:dnVnNsn>0108728519</v20:dnVnNsn>
                <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
                <v20:extRef>Regression WS</v20:extRef>
                <v20:reasonComment>Order confirmed, UP Information now
available</v20:reasonComment>
                <v20:contrEleId>120</v20:contrEleId>
                <v20:orderType>1</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            </v20:bbcsOrder>
        </v20:notification>
    </v20:bbcsOrder>
</v20:bbcsOrder>

```

```

        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:cableBox>
            <v20:boardNr>19</v20:boardNr>
            <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
            <v20:contactType>5</v20:contactType>
            <v20:contactNr>11</v20:contactNr>
            <v20:coordinateX>694135</v20:coordinateX>
            <v20:coordinateY>266730</v20:coordinateY>
        </v20:cableBox>
        <v20:nrofWires>2</v20:nrofWires>
        <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
        <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
        <v20:endPoint>
            <v20:taxRegion>64</v20:taxRegion>
            <v20:accessNet>BOL</v20:accessNet>
            <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
            <v20:site>BOLQ</v20:site>
        </v20:endPoint>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744015</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:40:33.357+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:objectStep>1</v20:objectStep>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:cableBox>
            <v20:boardNr>19</v20:boardNr>
            <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
            <v20:contactType>5</v20:contactType>
            <v20:contactNr>11</v20:contactNr>
            <v20:coordinateX>694135</v20:coordinateX>
            <v20:coordinateY>266730</v20:coordinateY>
        </v20:cableBox>
        <v20:nrofWires>2</v20:nrofWires>
        <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
        <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
        <v20:endPoint>

```

```

        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744016</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:40:40.768+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>18</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000038000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs change Type</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>18</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>209</v20:speedProfileNr>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744017</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:40:41.588+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>14</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000039000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionSrvTst</v20:extRef>
        <v20:contrEleId>9</v20:contrEleId>
        <v20:orderType>14</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744018</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:11.407+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>

```

```

    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000032000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
      <v20:extRef>Regression WS</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>120</v20:contrEleId>
      <v20:orderType>1</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:poolType>pool12</v20:poolType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>7</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:cableBox>
        <v20:boardNr>19</v20:boardNr>
        <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
        <v20:contactType>5</v20:contactType>
        <v20:contactNr>11</v20:contactNr>
        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
      </v20:cableBox>
      <v20:nrofWires>2</v20:nrofWires>
      <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
      <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
      <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
      </v20:endPoint>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744019</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:27.063+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000032000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
      <v20:extRef>Regression WS</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>120</v20:contrEleId>
      <v20:orderType>1</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:cableBox>
                    <v20:boardNr>19</v20:boardNr>
                    <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                    <v20:contactType>5</v20:contactType>
                    <v20:contactNr>11</v20:contactNr>
                    <v20:coordinateX>694135</v20:coordinateX>
                    <v20:coordinateY>266730</v20:coordinateY>
                </v20:cableBox>
                <v20:nrofWires>2</v20:nrofWires>
                <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
                <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
                <v20:endPoint>
                    <v20:taxRegion>64</v20:taxRegion>
                    <v20:accessNet>BOL</v20:accessNet>
                    <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
                    <v20:site>BOLQ</v20:site>
                </v20:endPoint>
                <v20:psdClass>20</v20:psdClass>
                <v20:networkType>3</v20:networkType>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744020</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:43:27.697+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>1</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>6</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000032000000</v20:orderNr>
                <v20:dnVnNsn>0108728519</v20:dnVnNsn>
                <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
                <v20:extRef>Regression WS</v20:extRef>
                <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
                <v20:contrEleId>120</v20:contrEleId>
                <v20:orderType>1</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:cableBox>
                    <v20:boardNr>19</v20:boardNr>
                    <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                    <v20:contactType>5</v20:contactType>
                    <v20:contactNr>11</v20:contactNr>

```

```

        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrofWires>2</v20:nrofWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744021</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:27.942+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:cableBox>
        <v20:boardNr>19</v20:boardNr>
        <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
        <v20:contactType>5</v20:contactType>
        <v20:contactNr>11</v20:contactNr>
        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrofWires>2</v20:nrofWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>

```

```

        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744022</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:43:31.696+02:00</v20:notificationDateTime>
        <v20:notificationEvent>2</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>1</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>7</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
            <v20:extRef>Regression WS</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>120</v20:contrEleId>
            <v20:orderType>1</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:poolType>pool12</v20:poolType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>7</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:cableBox>
                <v20:boardNr>19</v20:boardNr>
                <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                <v20:contactType>5</v20:contactType>
                <v20:contactNr>11</v20:contactNr>
                <v20:coordinateX>694135</v20:coordinateX>
                <v20:coordinateY>266730</v20:coordinateY>
            </v20:cableBox>
            <v20:nrofWires>2</v20:nrofWires>
            <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
            <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
            <v20:endPoint>
                <v20:taxRegion>64</v20:taxRegion>
                <v20:accessNet>BOL</v20:accessNet>
                <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
                <v20:site>BOLQ</v20:site>
            </v20:endPoint>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744023</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:43:36.584+02:00</v20:notificationDateTime>
        <v20:notificationEvent>2</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>1</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>7</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>

```

```

        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:cableBox>
            <v20:boardNr>19</v20:boardNr>
            <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
            <v20:contactType>5</v20:contactType>
            <v20:contactNr>11</v20:contactNr>
            <v20:coordinateX>694135</v20:coordinateX>
            <v20:coordinateY>266730</v20:coordinateY>
        </v20:cableBox>
        <v20:nrofWires>2</v20:nrofWires>
        <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
        <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
        <v20:endPoint>
            <v20:taxRegion>64</v20:taxRegion>
            <v20:accessNet>BOL</v20:accessNet>
            <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
            <v20:site>BOLQ</v20:site>
        </v20:endPoint>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744026</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:51.906+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>13</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>

```

```

<v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
<v20:accessSpeedChanged>1</v20:accessSpeedChanged>
<v20:cableBox>
  <v20:boardNr>19</v20:boardNr>
  <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
  <v20:contactType>5</v20:contactType>
  <v20:contactNr>11</v20:contactNr>
  <v20:coordinateX>694135</v20:coordinateX>
  <v20:coordinateY>266730</v20:coordinateY>
</v20:cableBox>
<v20:nrOfWires>2</v20:nrOfWires>
<v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
<v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
<v20:endPoint>
  <v20:taxRegion>64</v20:taxRegion>
  <v20:accessNet>BOL</v20:accessNet>
  <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
  <v20:site>BOLQ</v20:site>
</v20:endPoint>
<v20:psdClass>20</v20:psdClass>
<v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744025</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:45:08.271+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>13</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000034000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
    <v20:extRef>Regression SrvAdd Internet</v20:extRef>
    <v20:contrEleId>100</v20:contrEleId>
    <v20:orderType>13</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>13</v20:dnType>
    <v20:interleaveMode>2</v20:interleaveMode>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
  </v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744026</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:45:08.745+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>13</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000034000000</v20:orderNr>

```

```

        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744027</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:47:53.449+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:objectStep>4</v20:objectStep>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Order confirmed, UP Information now
available</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744028</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:48:57.857+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:objectStep>1</v20:objectStep>
    <v20:bbcsOrder>

```

```

        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744029</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:10.380+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744030</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:26.091+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>

```

```

        <v20:bbcsOrder>
          <v20:orderNr>77771020170522000034000000</v20:orderNr>
          <v20:dnVnNsn>0108728519</v20:dnVnNsn>
          <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
          <v20:extRef>Regression SrvAdd Internet</v20:extRef>
          <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
          <v20:contrEleId>100</v20:contrEleId>
          <v20:orderType>13</v20:orderType>
          <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
          <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
          <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
          <v20:bbType>2</v20:bbType>
          <v20:dnType>13</v20:dnType>
          <v20:interleaveMode>2</v20:interleaveMode>
          <v20:opStatus>2</v20:opStatus>
          <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
          <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
          <v20:psdClass>20</v20:psdClass>
          <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
      </v20:notification>
    </v20:notification>
    <v20:notification>
      <v20:notificationId>137744031</v20:notificationId>
      <v20:notificationDateTime>2017-05-22T10:51:26.621+02:00</v20:notificationDateTime>
      <v20:notificationEvent>1</v20:notificationEvent>
      <v20:object>1</v20:object>
      <v20:objectType>13</v20:objectType>
      <v20:initiator>1</v20:initiator>
      <v20:activator>1</v20:activator>
      <v20:objectState>6</v20:objectState>
      <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
      </v20:bbcsOrder>
    </v20:notification>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744032</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:28.974+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>

```

```

        <v20:objectState>6</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000034000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
            <v20:extRef>Regression SrvAdd Internet</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>100</v20:contrEleId>
            <v20:orderType>13</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744033</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:51:31.728+02:00</v20:notificationDateTime>
        <v20:notificationEvent>1</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>13</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>6</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000034000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
            <v20:extRef>Regression SrvAdd Internet</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>100</v20:contrEleId>
            <v20:orderType>13</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744034</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:53:11.314+02:00</v20:notificationDateTime>
        <v20:notificationEvent>1</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>13</v20:objectType>
        <v20:initiator>1</v20:initiator>

```

```

    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:speedProfileNr>203</v20:speedProfileNr>
      <v20:effectiveSpeed>
        <v20:up>500</v20:up>
        <v20:down>5000</v20:down>
      </v20:effectiveSpeed>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744035</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:26.954+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:speedProfileNr>203</v20:speedProfileNr>
      <v20:effectiveSpeed>
        <v20:up>500</v20:up>
        <v20:down>5000</v20:down>
      </v20:effectiveSpeed>
    </v20:bbcsOrder>
  </v20:notification>

```

```

        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744036</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:27.870+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>7</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:effectiveSpeed>
            <v20:up>500</v20:up>
            <v20:down>5000</v20:down>
        </v20:effectiveSpeed>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744037</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:29.578+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>7</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>

```

```

        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:effectiveSpeed>
            <v20:up>500</v20:up>
            <v20:down>5000</v20:down>
        </v20:effectiveSpeed>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744038</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:56.311+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>13</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744039</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T11:34:16.012+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>2</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000046000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
        <v20:contrEleId>110</v20:contrEleId>
        <v20:orderType>2</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T12:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T14:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000047000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744040</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T11:36:13.604+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000046000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T12:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T14:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>1</v20:dnType>
                <v20:opStatus>2</v20:opStatus>
                <v20:customerOrderNr>77771020170522000047000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:psdClass>20</v20:psdClass>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744041</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T12:17:29.135+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000048000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744042</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T12:17:29.787+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>

```

```

<v20:objectType>13</v20:objectType>
<v20:initiator>1</v20:initiator>
<v20:activator>1</v20:activator>
<v20:objectState>1</v20:objectState>
<v20:bbcsOrder>
  <v20:orderNr>77771020170522000050000000</v20:orderNr>
  <v20:dnVnNsn>0719875577</v20:dnVnNsn>
  <v20:extRef>extRef RegressionSrvTst</v20:extRef>
  <v20:contrEleId>9</v20:contrEleId>
  <v20:orderType>13</v20:orderType>
  <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
  <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
  <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
  <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
  <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  <v20:speedProfileNr>0</v20:speedProfileNr>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744043</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T12:19:16.747+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>2</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>1</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000048000000</v20:orderNr>
    <v20:dnVnNsn>0719875577</v20:dnVnNsn>
    <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
    <v20:contrEleId>110</v20:contrEleId>
    <v20:orderType>2</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>1</v20:dnType>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
  </v20:bbcsOrder>
</v20:notification>
</v20:response>
</v20:getNotificationResponse>
</soapenv:Body>
</soapenv:Envelope>

```

8 Appendix B: Notifications created for "<?xml version='1.0' encoding='iso-8859-1'?"

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v12:disconnectResponse xmlns:v12="http://www.swisscom.com/wsg/fa/v12">
      <v12:response correlationId="Regr Test Disconnect">
        <v12:success>true</v12:success>
        <v12:orderNr>77771020160930000059000000</v12:orderNr>
      </v12:response>
    </v12:disconnectResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

```
</soapenv:Body>
</soapenv:Envelope>
```

9 Assurance (BBCS Trouble Ticket)"

9.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:request>
        <v20:ispId>777710</v20:ispId>
        <v20:object>3</v20:object>
        <v20:notificationIdFrom>137743972</v20:notificationIdFrom>
      </v20:request>
    </v20:getNotification>
  </soapenv:Body>
</soapenv:Envelope>
```

9.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:response>
        <v20:success>true</v20:success>
        <v20:limitReached>false</v20:limitReached>
        <v20:notification>
          <v20:notificationId>137744131</v20:notificationId>
          <v20:notificationDateTime>2017-07-12T13:26:16.000+02:00</v20:notificationDateTime>
          <v20:notificationEvent>1</v20:notificationEvent>
          <v20:object>3</v20:object>
          <v20:initiator>1</v20:initiator>
          <v20:activator>1</v20:activator>
          <v20:objectState>1</v20:objectState>
          <v20:ispApplicationId>100900</v20:ispApplicationId>
          <v20:bbcsAccessTt>
            <v20:ttIdWsg>2447602</v20:ttIdWsg>
            <v20:dnVnNsn>0108542092</v20:dnVnNsn>
            <v20:extRef>WS_TEST_1</v20:extRef>
            <v20:saSlaRequested>1</v20:saSlaRequested>
            <v20:speedProfileNr>248</v20:speedProfileNr>
          </v20:bbcsAccessTt>
        </v20:notification>
        <v20:notification>
          <v20:notificationId>137744132</v20:notificationId>
          <v20:notificationDateTime>2017-07-12T13:26:16.000+02:00</v20:notificationDateTime>
          <v20:notificationEvent>1</v20:notificationEvent>
          <v20:object>3</v20:object>
          <v20:initiator>1</v20:initiator>
          <v20:activator>1</v20:activator>
```

```

<v20:objectState>3</v20:objectState>
<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744133</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:18.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744134</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:18.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseComment>Sent to TT system</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744135</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>

```

```

<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:responseComment>Received by TT system</v20:responseComment>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744136</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseComment>Processing by TT system</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744137</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:progressCommentCode>60</v20:progressCommentCode>
    <v20:responseComment>dispatching</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744138</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>

```

```

<v20:activator>1</v20:activator>
<v20:objectState>5</v20:objectState>
<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:progressCommentCode>58</v20:progressCommentCode>
  <v20:responseComment>done</v20:responseComment>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744139</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>6</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:progressCommentCode>64</v20:progressCommentCode>
    <v20:responseComment>closed confirmed</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744140</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>6</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseCommentCode>207</v20:responseCommentCode>
    <v20:responseComment>IP-Access Swisscom O.K.</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
</v20:response>
</v20:getNotificationResponse>

```

```
</soapenv:Body>
</soapenv:Envelope>
```

10 Appendix C: getDetail BBCS TroubleTicket

10.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Header/>
  <soapenv:Body>
    <v28:getDetailTroubleTicket>
      <v28:request correlationId="getDetailTroubleTicket">
        <v28:ispId>777710</v28:ispId>
        <v28:ttIdWsg>2447601</v28:ttIdWsg>
      </v28:request>
    </v28:getDetailTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>
```

10.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Body>
    <v28:getDetailTroubleTicketResponse xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
      <v28:response>
        <v28:success>true</v28:success>
        <v28:ticket>
          <v28:ttState>6</v28:ttState>
          <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
          <v28:lastModifiedDateTime>2017-07-12T13:12:02.000+02:00</v28:lastModifiedDateTime>
          <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
          <v28:responseComment>IP-Access Swisscom O.K.</v28:responseComment>
          <v28:responseCommentCode>207</v28:responseCommentCode>
          <v28:problemDescription>any Problem with somewhat reason</v28:problemDescription>
          <v28:billingAction>2</v28:billingAction>
          <v28:ttIdWsg>2447601</v28:ttIdWsg>
          <v28:ttIdSys>SIM1232447601</v28:ttIdSys>
          <v28:ispTtRef>WS_TEST_1</v28:ispTtRef>
          <v28:ispId>777710</v28:ispId>
          <v28:ispName>Testaccount WSG Team</v28:ispName>
          <v28:ispPhoneNr>0584443593</v28:ispPhoneNr>
          <v28:comment>any comment</v28:comment>
          <v28:closedDateTime>2010-03-22T11:11:00.000+01:00</v28:closedDateTime>
          <v28:contrEleId>100</v28:contrEleId>
          <v28:errorCategory>541</v28:errorCategory>
          <v28:problemDateTime>2009-09-01T09:30:00.000+02:00</v28:problemDateTime>
          <v28:endUser>
            <v28:street>Schorenstrasse</v28:street>
            <v28:houseNr>68e</v28:houseNr>
            <v28:building>1a</v28:building>
            <v28:zip>3000</v28:zip>
            <v28:city>Bern</v28:city>
            <v28:endUserName>EndUserName</v28:endUserName>
            <v28:endUserLogin>REndUserLogin</v28:endUserLogin>
            <v28:endUserPhoneNr>0794140424</v28:endUserPhoneNr>
          </v28:endUser>
          <v28:contactInfo>
            <v28:firstName>Hans</v28:firstName>
            <v28:lastName>Meier</v28:lastName>
            <v28:phoneNr>0313220133</v28:phoneNr>
            <v28:notificationType>Sms</v28:notificationType>
            <v28:notificationAddress>im Haus</v28:notificationAddress>
          </v28:contactInfo>
        </v28:ticket>
      </v28:response>
    </v28:getDetailTroubleTicketResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

</v28:contactInfo>
<v28:dnVnNsn>0108542092</v28:dnVnNsn>
<v28:dnVnNsnReq>0108542092</v28:dnVnNsnReq>
<v28:dnType>13</v28:dnType>
<v28:bbType>2</v28:bbType>
<v28:serviceSpeedProfileNr>248</v28:serviceSpeedProfileNr>
<v28:serviceSpeedProfileNrReq>248</v28:serviceSpeedProfileNrReq>
<v28:cableBox>
  <v28:boardNr>10000</v28:boardNr>
  <v28:switchingPlaceNr>1</v28:switchingPlaceNr>
  <v28:contactType>1</v28:contactType>
  <v28:contactNr>1</v28:contactNr>
</v28:cableBox>
<v28:lastLoginDateTime>2009-09-01T08:30:00.000+02:00</v28:lastLoginDateTime>
<v28:ttSaSla>4</v28:ttSaSla>
<v28:wsgSaSla>4</v28:wsgSaSla>
<v28:bbcsEquipment>Equipment</v28:bbcsEquipment>
<v28:suspended>false</v28:suspended>
<v28:nrOfWires>2</v28:nrOfWires>
<v28:ppCount>1</v28:ppCount>
<v28:stdId>160</v28:stdId>
<v28:expense>142</v28:expense>
<v28:lineMeasurementData>
  <v28:noiseMarginUp>11.1</v28:noiseMarginUp>
  <v28:noiseMarginDown>14</v28:noiseMarginDown>
  <v28:actualBitrateUp>16504</v28:actualBitrateUp>
  <v28:actualBitrateDown>55040</v28:actualBitrateDown>
  <v28:attainableBitrateUp>23728</v28:attainableBitrateUp>
  <v28:attainableBitrateDown>16.8</v28:attainableBitrateDown>
  <v28:attenuationDown>14.8</v28:attenuationDown>
  <v28:nrSpontaneousResyncs>1</v28:nrSpontaneousResyncs>
  <v28:calculatedLineLength>862</v28:calculatedLineLength>
  <v28:correctionDbLineLength>872</v28:correctionDbLineLength>
  <v28:xdslLineState>up</v28:xdslLineState>
  <v28:lastStatusChange>1970-01-01T01:00:00.000+01:00</v28:lastStatusChange>
<v28:icaResult>
  <v28:analysisDate>2016-03-15T14:46:15.000+01:00</v28:analysisDate>
  <v28:analysisDate24h>2016-03-10T14:46:15.000+01:00</v28:analysisDate24h>
  <v28:analysisState>6</v28:analysisState>
  <v28:analysisType>1</v28:analysisType>
  <v28:problemDetected>0</v28:problemDetected>
  <v28:potentialAttainBitrateDown>-1</v28:potentialAttainBitrateDown>
  <v28:potentialAttainBitrateUp>-1</v28:potentialAttainBitrateUp>
  <v28:potentialAccessProfileNr>0</v28:potentialAccessProfileNr>
  <v28:accessSpeedGainDown>-1</v28:accessSpeedGainDown>
  <v28:accessSpeedGainUp>-1</v28:accessSpeedGainUp>
  <v28:accessProblemType>0</v28:accessProblemType>
  <v28:bbrSocketInstalled>false</v28:bbrSocketInstalled>
  <v28:bbrSocketInstallationDate>1970-01-
01T02:00:00.000+01:00</v28:bbrSocketInstallationDate>
  <v28:icaProblems>
    <v28:description>1</v28:description>
    <v28:descriptionText>BridgeTap</v28:descriptionText>
    <v28:confidence>90</v28:confidence>
    <v28:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v28:impact>
    <v28:impactAttainBitrateDown>0</v28:impactAttainBitrateDown>
    <v28:impactAttainBitrateUp>0</v28:impactAttainBitrateUp>
  </v28:icaProblems>
  <v28:icaProblems>
    <v28:description>2</v28:description>
    <v28:descriptionText>Degraded Contact</v28:descriptionText>
    <v28:confidence>91</v28:confidence>
    <v28:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v28:impact>

```

```

        <v28:impactAttainBitrateDown>0</v28:impactAttainBitrateDown>
        <v28:impactAttainBitrateUp>0</v28:impactAttainBitrateUp>
    </v28:icaProblems>
    </v28:icaResult>
</v28:lineMeasurementData>
<v28:opStatus>7</v28:opStatus>
<v28:ispApplicationId>100900</v28:ispApplicationId>
<v28:bbAdslEmulated>1</v28:bbAdslEmulated>
<v28:measuredIspValues>Measurements ISP</v28:measuredIspValues>
<v28:historyItem>
    <v28:ttState>6</v28:ttState>
    <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
    <v28:lastModifiedDateTime>2017-07-
12T13:12:01.000+02:00</v28:lastModifiedDateTime>
    <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
    <v28:responseComment>closed confirmed</v28:responseComment>
    <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
    <v28:progressCommentCode>64</v28:progressCommentCode>
    <v28:progressDateTime>2010-03-22T11:11:00.000+01:00</v28:progressDateTime>
    <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
    <v28:ttState>5</v28:ttState>
    <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
    <v28:lastModifiedDateTime>2017-07-
12T13:12:00.000+02:00</v28:lastModifiedDateTime>
    <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
    <v28:responseComment>done</v28:responseComment>
    <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
    <v28:progressCommentCode>58</v28:progressCommentCode>
    <v28:progressDateTime>2010-03-22T11:11:00.000+01:00</v28:progressDateTime>
    <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
    <v28:ttState>5</v28:ttState>
    <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
    <v28:lastModifiedDateTime>2017-07-
12T13:12:00.000+02:00</v28:lastModifiedDateTime>
    <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
    <v28:responseComment>dispatching</v28:responseComment>
    <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
    <v28:progressCommentCode>60</v28:progressCommentCode>
    <v28:progressDateTime>2010-03-20T18:01:00.000+01:00</v28:progressDateTime>
    <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
    <v28:ttState>5</v28:ttState>
    <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
    <v28:lastModifiedDateTime>2017-07-
12T13:11:59.000+02:00</v28:lastModifiedDateTime>
    <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
    <v28:responseComment>Processing by TT system</v28:responseComment>
    <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
    <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
    <v28:ttState>4</v28:ttState>
    <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
    <v28:lastModifiedDateTime>2017-07-
12T13:11:59.000+02:00</v28:lastModifiedDateTime>
    <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>

```

```

        <v28:responseComment>Received by TT system</v28:responseComment>
        <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
        </v28:historyItem>
        <v28:historyItem>
        <v28:ttState>4</v28:ttState>
        <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-07-
12T13:11:53.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:responseComment>Sent to TT system</v28:responseComment>
        <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
        <v28:progressDateTime>2017-07-12T13:11:54.000+02:00</v28:progressDateTime>
        <v28:billingAction>1</v28:billingAction>
        </v28:historyItem>
        <v28:historyItem>
        <v28:ttState>4</v28:ttState>
        <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-07-
12T13:11:52.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
        </v28:historyItem>
        <v28:historyItem>
        <v28:ttState>3</v28:ttState>
        <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-07-
12T13:11:41.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Batch</v28:lastModifiedUsername>
        <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
        </v28:historyItem>
        <v28:historyItem>
        <v28:ttState>1</v28:ttState>
        <v28:entryDateTime>2017-07-12T13:11:41.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-07-
12T13:11:41.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>HP Tester</v28:lastModifiedUsername>
        <v28:problemDescription>any Problem with somewhat
reason</v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
        </v28:historyItem>
        <v28:detailedWorkReport>Arbeitsbeschrieb 2</v28:detailedWorkReport>
        <v28:endPoint>
        <v28:dnOffice>64BOL</v28:dnOffice>
        <v28:site>BOL</v28:site>
        <v28:bbDeviceLocation>BOL</v28:bbDeviceLocation>
        <v28:siteCategory>6</v28:siteCategory>
        <v28:availableTechnologyTypes>
        <v28:technologyType>2</v28:technologyType>
        </v28:availableTechnologyTypes>
        </v28:endPoint>
        <v28:cpeInfo>
        <v28:cpeName>Motorola 7347-44 POTS rel.7.9</v28:cpeName>
        </v28:cpeInfo>
        <v28:vectorized>false</v28:vectorized>
        <v28:technologyType>1</v28:technologyType>
        </v28:ticket>
    </v28:response>
</v28:getDetailTroubleTicketResponse>

```

```
</soapenv:Body>
</soapenv:Envelope>
```

11 Appendix D: getOrderDetail

11.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v28:getDetailTroubleTicket>
      <v28:request correlationId="getDetailTroubleTicket">
        <v28:ispId>777710</v28:ispId>
        <v28:ttIdWsg>2647600</v28:ttIdWsg>
      </v28:request>
    </v28:getDetailTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>
```

11.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v28:getDetailTroubleTicketResponse xmlns:v28="http://www.swisscom.com/wsg/tt/v28">
      <v28:response>
        <v28:success>true</v28:success>
        <v28:ticket>
          <v28:ttState>6</v28:ttState>
          <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
          <v28:lastModifiedDateTime>2017-05-22T13:02:33.000+02:00</v28:lastModifiedDateTime>
          <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
          <v28:responseComment>IP-Access Swisscom O.K.</v28:responseComment>
          <v28:responseCommentCode>207</v28:responseCommentCode>
          <v28:problemDescription>\r\t\b  \ \ \b \t \r </v28:problemDescription>
          <v28:billingAction>2</v28:billingAction>
          <v28:ttIdWsg>2647600</v28:ttIdWsg>
          <v28:ttIdSys>SIM1232647600</v28:ttIdSys>
          <v28:ispTtRef>WS_TEST_13</v28:ispTtRef>
          <v28:ispId>777710</v28:ispId>
          <v28:ispName>Testaccount WSG Team</v28:ispName>
          <v28:ispPhoneNr>0584443593</v28:ispPhoneNr>
          <v28:comment>any comment</v28:comment>
          <v28:closedDateTime>2010-03-22T11:11:00.000+01:00</v28:closedDateTime>
          <v28:contrEleId>100</v28:contrEleId>
          <v28:errorCategory>541</v28:errorCategory>
          <v28:problemDateTime>2009-09-01T09:30:00.000+02:00</v28:problemDateTime>
          <v28:endUser>
            <v28:street>Schorenstrasse</v28:street>
            <v28:houseNr>68e</v28:houseNr>
            <v28:building>1a</v28:building>
            <v28:zip>3000</v28:zip>
          </v28:endUser>
        </v28:ticket>
      </v28:response>
    </v28:getDetailTroubleTicketResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

    <v28:city>Bern</v28:city>
    <v28:endUserName>EndUserName</v28:endUserName>
    <v28:endUserLogin>REndUserLogin</v28:endUserLogin>
    <v28:endUserPhoneNr>0794140426</v28:endUserPhoneNr>
  </v28:endUser>
  <v28:contactInfo>
    <v28:firstName>Hans</v28:firstName>
    <v28:lastName>Meier</v28:lastName>
    <v28:phoneNr>0313220033</v28:phoneNr>
    <v28:notificationType>Sms</v28:notificationType>
    <v28:notificationAddress>im Haus</v28:notificationAddress>
  </v28:contactInfo>
  <v28:dnVnNsn>0108728519</v28:dnVnNsn>
  <v28:dnVnNsnReq>0108728519</v28:dnVnNsnReq>
  <v28:dnType>13</v28:dnType>
  <v28:bbType>2</v28:bbType>
  <v28:serviceSpeedProfileNr>203</v28:serviceSpeedProfileNr>
  <v28:serviceSpeedProfileNrReq>203</v28:serviceSpeedProfileNrReq>
  <v28:cableBox>
    <v28:boardNr>334</v28:boardNr>
    <v28:switchingPlaceNr>0</v28:switchingPlaceNr>
    <v28:contactType>1</v28:contactType>
    <v28:contactNr>1</v28:contactNr>
  </v28:cableBox>
  <v28:lastLoginDateTime>2009-09-01T08:30:00.000+02:00</v28:lastLoginDateTime>
  <v28:ttSaSla>1</v28:ttSaSla>
  <v28:wsgSaSla>1</v28:wsgSaSla>
  <v28:bbcsEquipment>Equipment</v28:bbcsEquipment>
  <v28:suspended>false</v28:suspended>
  <v28:nrofWires>2</v28:nrofWires>
  <v28:ppCount>1</v28:ppCount>
  <v28:stdId>160</v28:stdId>
  <v28:expense>142</v28:expense>
  <v28:lineMeasurementData>
    <v28:noiseMarginUp>11.1</v28:noiseMarginUp>
    <v28:noiseMarginDown>14</v28:noiseMarginDown>
    <v28:actualBitrateUp>16504</v28:actualBitrateUp>
    <v28:actualBitrateDown>55040</v28:actualBitrateDown>
    <v28:attainableBitrateUp>23728</v28:attainableBitrateUp>
    <v28:attainableBitrateDown>16.8</v28:attainableBitrateDown>
    <v28:attenuationDown>14.8</v28:attenuationDown>
    <v28:nrSpontaneousResyncs>1</v28:nrSpontaneousResyncs>
    <v28:calculatedLineLength>862</v28:calculatedLineLength>
    <v28:correctionDbLineLength>872</v28:correctionDbLineLength>
    <v28:xdslLineState>up</v28:xdslLineState>
    <v28:lastStatusChange>1970-01-01T01:00:00.000+01:00</v28:lastStatusChange>
    <v28:icaResult>
      <v28:analysisDate>2016-03-15T14:46:15.000+01:00</v28:analysisDate>
      <v28:analysisDate26h>2016-03-10T14:46:15.000+01:00</v28:analysisDate26h>
      <v28:analysisState>6</v28:analysisState>
      <v28:analysisType>1</v28:analysisType>
      <v28:problemDetected>0</v28:problemDetected>
      <v28:potentialAttainBitrateDown>-1</v28:potentialAttainBitrateDown>
      <v28:potentialAttainBitrateUp>-1</v28:potentialAttainBitrateUp>
      <v28:potentialAccessProfileNr>0</v28:potentialAccessProfileNr>
      <v28:accessSpeedGainDown>-1</v28:accessSpeedGainDown>
      <v28:accessSpeedGainUp>-1</v28:accessSpeedGainUp>
      <v28:accessProblemType>0</v28:accessProblemType>
      <v28:bbrSocketInstalled>false</v28:bbrSocketInstalled>
      <v28:bbrSocketInstallationDate>1970-01-
01T02:00:00.000+01:00</v28:bbrSocketInstallationDate>
    <v28:icaProblems>
      <v28:description>1</v28:description>
      <v28:descriptionText>BridgeTap</v28:descriptionText>
      <v28:confidence>90</v28:confidence>
    </v28:icaProblems>
  </v28:lineMeasurementData>

```

```

kb/s</v28:impact>
    <v28:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
    <v28:impactAttainBitrateDown>0</v28:impactAttainBitrateDown>
    <v28:impactAttainBitrateUp>0</v28:impactAttainBitrateUp>
  </v28:icaProblems>
  <v28:icaProblems>
    <v28:description>2</v28:description>
    <v28:descriptionText>Degraded Contact</v28:descriptionText>
    <v28:confidence>91</v28:confidence>
    <v28:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v28:impact>
    <v28:impactAttainBitrateDown>0</v28:impactAttainBitrateDown>
    <v28:impactAttainBitrateUp>0</v28:impactAttainBitrateUp>
  </v28:icaProblems>
</v28:icaResult>
</v28:lineMeasurementData>
<v28:opStatus>2</v28:opStatus>
<v28:ispApplicationId>100900</v28:ispApplicationId>
<v28:bbAdslEmulated>1</v28:bbAdslEmulated>
<v28:measuredIspValues>Measurements ISP</v28:measuredIspValues>
<v28:reasonOfPotential>
  <v28:potential>
    <v28:potentialCode>1000</v28:potentialCode>
    <v28:potentialDescription>Pending upgrooming</v28:potentialDescription>
  </v28:potential>
  <v28:potential>
    <v28:potentialCode>1001</v28:potentialCode>
    <v28:potentialDescription>old CPE Firmware</v28:potentialDescription>
  </v28:potential>
  <v28:potential>
    <v28:potentialCode>-1000</v28:potentialCode>
    <v28:potentialDescription>stability issue - outstanding downgrooming
(ServiceImpact)</v28:potentialDescription>
  </v28:potential>
</v28:reasonOfPotential>
<v28:historyItem>
  <v28:ttState>6</v28:ttState>
  <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
  <v28:lastModifiedDateTime>2017-05-
22T13:02:32.000+02:00</v28:lastModifiedDateTime>
  <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
  <v28:responseComment>closed confirmed</v28:responseComment>
  <v28:problemDescription>\r\t\b  \ \b \t \r </v28:problemDescription>
  <v28:progressCommentCode>64</v28:progressCommentCode>
  <v28:progressDateTime>2010-03-22T11:11:00.000+01:00</v28:progressDateTime>
  <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
  <v28:ttState>5</v28:ttState>
  <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
  <v28:lastModifiedDateTime>2017-05-
22T13:02:32.000+02:00</v28:lastModifiedDateTime>
  <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
  <v28:responseComment>done</v28:responseComment>
  <v28:problemDescription>\r\t\b  \ \b \t \r </v28:problemDescription>
  <v28:progressCommentCode>58</v28:progressCommentCode>
  <v28:progressDateTime>2010-03-22T11:11:00.000+01:00</v28:progressDateTime>
  <v28:billingAction>1</v28:billingAction>
</v28:historyItem>
<v28:historyItem>
  <v28:ttState>5</v28:ttState>
  <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
  <v28:lastModifiedDateTime>2017-05-
22T13:02:32.000+02:00</v28:lastModifiedDateTime>
  <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>

```

```

        <v28:responseComment>dispatching</v28:responseComment>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:progressCommentCode>60</v28:progressCommentCode>
        <v28:progressDateTime>2010-03-20T18:01:00.000+01:00</v28:progressDateTime>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>5</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:31.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:responseComment>Processing by TT system</v28:responseComment>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>4</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:31.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:responseComment>Received by TT system</v28:responseComment>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>4</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:26.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:responseComment>Sent to TT system</v28:responseComment>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:progressDateTime>2017-05-22T13:02:26.000+02:00</v28:progressDateTime>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>4</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:20.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Pol</v28:lastModifiedUsername>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>3</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:00.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>Batch</v28:lastModifiedUsername>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:historyItem>
        <v28:ttState>1</v28:ttState>
        <v28:entryDateTime>2017-05-22T13:02:00.000+02:00</v28:entryDateTime>
        <v28:lastModifiedDateTime>2017-05-
22T13:02:00.000+02:00</v28:lastModifiedDateTime>
        <v28:lastModifiedUsername>HP Tester</v28:lastModifiedUsername>
        <v28:problemDescription>\r\t\b  \ \  \b  \t  \r </v28:problemDescription>
        <v28:billingAction>1</v28:billingAction>
    </v28:historyItem>
    <v28:detailedWorkReport>Arbeitsbescrieb 2</v28:detailedWorkReport>

```

```

<v28:endPoint>
  <v28:dnOffice>64BOL</v28:dnOffice>
  <v28:site>BOL</v28:site>
  <v28:bbDeviceLocation>BOL</v28:bbDeviceLocation>
  <v28:siteCategory>6</v28:siteCategory>
  <v28:availableTechnologyTypes>
    <v28:technologyType>1</v28:technologyType>
    <v28:technologyType>2</v28:technologyType>
  </v28:availableTechnologyTypes>
</v28:endPoint>
<v28:cpeInfo>
  <v28:cpeName>Motorola HGW5 7347-44-20SC WIAD "CPE5 WIAD (POTS)", FW 7.8.6r5,
IKNS r71</v28:cpeName>
  <v28:dslamTypeAllowed>
    <v28:technology>2</v28:technology>
    <v28:dslamType>2</v28:dslamType>
    <v28:dslamType>3</v28:dslamType>
  </v28:dslamTypeAllowed>
  <v28:capability>
    <v28:technologyType>1</v28:technologyType>
    <v28:capabilityOverall>7</v28:capabilityOverall>
    <v28:capabilityHardware>1</v28:capabilityHardware>
    <v28:capabilityFirmware>2</v28:capabilityFirmware>
  </v28:capability>
  <v28:capability>
    <v28:technologyType>2</v28:technologyType>
    <v28:capabilityOverall>1</v28:capabilityOverall>
    <v28:capabilityHardware>2</v28:capabilityHardware>
    <v28:capabilityFirmware>0</v28:capabilityFirmware>
  </v28:capability>
  <v28:capability>
    <v28:technologyType>3</v28:technologyType>
    <v28:capabilityOverall>2</v28:capabilityOverall>
    <v28:capabilityHardware>0</v28:capabilityHardware>
    <v28:capabilityFirmware>1</v28:capabilityFirmware>
  </v28:capability>
  <v28:comment>CPE Info Comment</v28:comment>
</v28:cpeInfo>
<v28:vectorized>>false</v28:vectorized>
<v28:technologyType>1</v28:technologyType>
</v28:ticket>
</v28:response>
</v28:getDetailTroubleTicketResponse>
</soapenv:Body>
</soapenv:Envelope>

```