

WSG B2B Web Service Tutorial

Version	50
Issue date	11.06.2020
Replaces version	49
Valid from	23.06.2020 (WSG 20.06)
Valid until	recalled or replaced by new version
Classification	Technical Support Documentation (BBCS and FA)
Status	Released

- Contents

Release.....	4
1 Introduction.....	6
1.1 Purpose.....	6
1.2 Target readership, requirements of the reader.....	6
1.3 Referenced documents.....	6
2 Notification (Tracking).....	7
2.1 Subscribe to Notifications.....	7
2.2 Notification Web Service.....	9
3 Fulfillment (BBCS Order).....	14
3.1 Process Overview.....	14
3.2 Qualification.....	15
3.3 Customer order creation.....	36
3.4 Modification of Base Product (Access) and Addition of Streaming Service.....	39
3.5 Change of Best Effort Service (Speed) and Reduction of Streaming Service.....	42
3.6 Change of Internet Service Provider.....	44
3.7 Deprovisioning (Disconnect).....	45
3.8 Products, Restrictions and Dependencies.....	47
3.9 Get Order Detail.....	49
4 Fulfillment (ULL Orders).....	50
4.1 Qualification.....	50
4.2 Creating a Full Access subscription.....	55
4.3 Modification of a Full Access description.....	59
4.4 Disconnection of a Full Access subscription.....	60
5 Assurance (BBCS Trouble Ticket).....	61
5.1 Process Overview.....	61
5.2 Get xDSL Info	62
5.3 Get Appointment.....	81
5.4 Creation of a Trouble Ticket.....	87
5.5 Get Detail.....	91
5.6 AccessProfile modification.....	94
5.7 Connectivity Check	99
6 Assurance (ULL Trouble Ticket).....	101
6.1 Creation of a Trouble Ticket.....	101
6.2 Get Detail.....	101
6.3 Add WorkLog.....	102
7 Voice Messages.....	103
7.1 GUI.....	103
7.2 Notifications.....	104
8 Appendix A: Notifications created for order.....	105
8.1 Request.....	105
8.2 Response.....	105
9 Appendix B: Notifications created for iso-8859-1.....	125
10 Appendix C: Notification created for trouble ticket.....	126
10.1 Request.....	126

10.2	Response.....	126
------	---------------	-----

Checklist of changes

Version	Date	Changed by	Comments / nature of the change
0.1	29.10.2010	HP	- Initial version
40	31.05.2018	Mikko Louie Abad	- Update for newer B2B June 18
41	31.08.2018	Mikko Louie Abad	- Update for newer B2B September 18
42	25.09.2018	Mikko Louie Abad	- Update for newer B2B October 18
43	02.11.2018	Mikko Louie Abad	- Update for newer B2B November 18
44	08.05.2019	Peter Gurtner	- Update for newer B2B WSG 19.05
45	04.06.2019	Mikko Louie Abad	- Update for newer B2B WSG 19.06
46	09.07.2019	Mikko Louie Abad	- Update for newer B2B WSG 19.07
47	03.10.2019	Mikko Louie Abad	- Update for newer B2B WSG 19.10
48	30.10.2019	Mikko Louie Abad	- Update for newer B2B WSG 19.11
49	09.04.2020	Stefan Thöni	- Update for newer B2B WSG 20.04
50	11.06.2020	Alexandru Raducan	- Update for newer B2B WSG 20.06

Release

int.Version	Date	Released by	Comments / nature of the change
10	25.02.2011	A. Studerus (iA rope1)	Released for WSG-8.3 (Mar 2011)
40	05.06.2018	H.Künzi	Released for WSG-18.06 (Jun18)
41	11.09.2018	R.Bühler	Released for WSG-18.09 (Sep18)
42	02.10.2018	H.Künzi	Released for WSG-18.10 (Oct18)
43	06.11.2018	H.Künzi	Released for WSG-18.11 (Nov18)
44	08.05.2019	H.Künzi	Released for WSG-19.05 (Mai19)
45	11.06.2019	H.Künzi	Released for WSG-19.06 (Jun19)
46	10.07.2019	H.Künzi	Released for WSG-19.07 (Jul19)
47	03.10.2019	H.Künzi	Released for WSG-19.10 (Oct19)
48	31.10.2019	H.Künzi	Released for WSG-19.11 (Nov19)
49	15.04.2020	HPE	Released for WSG-20.04 (Apr20)
50	11.06.2020	HPE	Released for WSG-20.06 (Jun20)

1 Introduction

1.1 Purpose

This document provides information on how to integrate an ISP's/PTS's fulfillment (order handling) and assurance (trouble ticketing) system using the Web services offered by WSG. The following services are covered with examples:

- Notification
- Fulfillment
- Assurance

1.2 Target readership, requirements of the reader

This document addresses architects and developers of client applications using the services mentioned above. Knowledge of Web service technology, the WSG system and the BBCS ordering process are needed.

1.3 Referenced documents

- [1] B2B Interfaces Overview, B2B_Interfaces-Overview.doc
- [2] WSG Model Notification - WEB Outbound (v20.0.1), wsgNotification_v20.0.1.zip
- [3] WSG Model - WEB Outbound (v43.0.1), wsgBb_v43.0.1.zip
- [4] WSG Model - WEB Outbound Trouble Ticket (v40.0.0), wsgTt_v40.0.0.zip
- [5] WSG Model – Web Appointment Booking (v3.0.1), wsgAppBooking_v3.0.1.zip
- [6] WSG Model - FA / TAL - Fulfillment (v16.0.0), wsgFa_v16.0.0.zip
- [7] WSG Model - FA / TAL - Assurance (v4.0.1), wsgFaa_v4.0.1.zip

2 Notification (Tracking)

The Notification Service is used to track the processing of Orders in WSG and acts as a replacement for the different list functions of the file transfer (listRequest, listTdmMessageRequest, etc.) and the notification by email.

Instead of requesting a list of orders in form of a file the Notification Service offers the possibility to subscribe to notification messages which are created if a specific event occurs. They can then be retrieved via the Notification Web service and remain on the system for a defined number of days (currently 4 days). The notification messages contain the data that is needed to keep the client system up-to-date with the progress of an order. If at a certain point more data is needed, there is always the possibility to retrieve all the details of an order by using a different Web service, e.g. the BB Outbound service for orders.

2.1 Subscribe to Notifications

Changes to the following objects can be notified:

- BBCS-Order
- BBCS-Installation Ticket
- BBCS-Access TT
- BBCS-Connectivity TT
- FA-Order
- FA-TT
- FA-Clarification T
- Information Request
- NetworkCustomerNotifications
- Voice Business

The notifications can be subscribed to in the administration of the corresponding service, for example in the BBCS Order GUI as shown on the next screen shots:

Order settings
Installation Ticket settings
Voice Message Settings
ISP Pool Settings
All ISP Pool Settings

BB Order settings

Voice message e-mail
xyz@zyx.net
☐ Notify voice message

State change e-mail
xyz@zyx.net

Notify on entering state

Object Type	Initiator	Activator	Object State	Step	Event	Comment	By Email	By Notification
-	ISP	Order	ENTERED	-	Order Notification	BBCS Order by ISP Status ENTERED	☐	☒
-	ISP	Order	HOLDING	-	Order Notification	BBCS Order by ISP Status HOLDING	☐	☒
-	ISP	Order	CHECKED	-	Order Notification	BBCS Order by ISP Status CHECKED	☐	☒
-	ISP	Order	EXECUTED	-	Order Notification	BBCS Order by ISP Status EXECUTED	☐	☒
-	ISP	Order	REJECTED	-	Order Notification	BBCS Order by ISP Status REJECTED	☐	☒
-	ISP	Order	COMPLETED	-	Order Notification	BBCS Order by ISP Status COMPLETED	☐	☒
-	ISP	Order	EXCEPTION	-	Order Notification	BBCS Order by ISP Status EXCEPTION	☐	☒
-	SCS	Order	COMPLETED	-	Order Notification	BBCS Order by SCS Status COMPLETED	☐	☒

Special informations e-mail
xyz@zyx.net
☐ Notify special informations

Special order notification e-mail
xyz@zyx.net

back
submit
reset

Order settings

Installation Ticket settings

Voice Message Settings

ISP Pool Settings

All ISP Pool Settings

Notify on entering state

Object Type	Initiator	Activator	Object State	Step	Event	Comment	By Notification
GV01	-	-	-	-	Classical Notification	New Subscriber	☒
GV02	-	-	-	-	Classical Notification	New Subscriber	☒
GV03	-	-	-	-	Classical Notification	Relocation	☒
GV04	-	-	-	-	Classical Notification	Relocation	☒
GV05	-	-	-	-	Classical Notification	Temporary Lines	☒
GV06	-	-	-	-	Classical Notification	Temporary Lines	☒
GV11	-	-	-	-	Classical Notification	Correction	☒
GV12	-	-	-	-	Classical Notification	Transfer	☒
GV14	-	-	-	-	Classical Notification	Cancellation	☒
GV15	-	-	-	-	Classical Notification	Relocation	☒
GV16	-	-	-	-	Classical Notification	Number Change	☒
GV17	-	-	-	-	Classical Notification	Access Type Change	☒
GV25	-	-	-	-	Classical Notification	Temporary Service Canceled	☒
GV37	-	-	-	-	Classical Notification	Temporary Service Canceled	☒

back

submit


reset

2.2 Notification Web Service

The Notification Web service is used to retrieve the notifications created based on the subscriptions to the different objects that can be notified.

For a detailed interface definition see [2]

2.2.1 Request

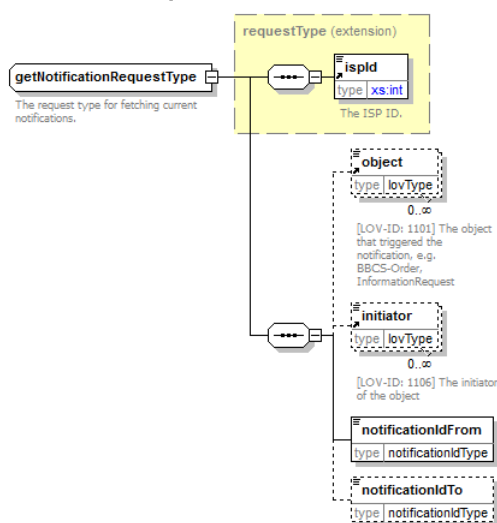


The typical usage is to periodically poll for all new notifications for a specific ISP/PTS. This can be achieved by calling the getNotification() operation with the “ispld” of the ISP/PTS and the “notificationIdFrom” set to the

maximum value received on the previous call + 1 (boundaries are included in the selection). It is also possible to additionally filter the notifications by object which is useful if the states of the different objects are tracked by different client processes.

A sample XML for the getNotification() request:

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:request>
        <v20:ispId>777710</v20:ispId>
        <v20:object>3</v20:object>
        <v20:notificationIdFrom>82178505</v20:notificationIdFrom>
      </v20:request>
    </v20:getNotification>
  </soapenv:Body>
</soapenv:Envelope>
```


2.2.2 Response

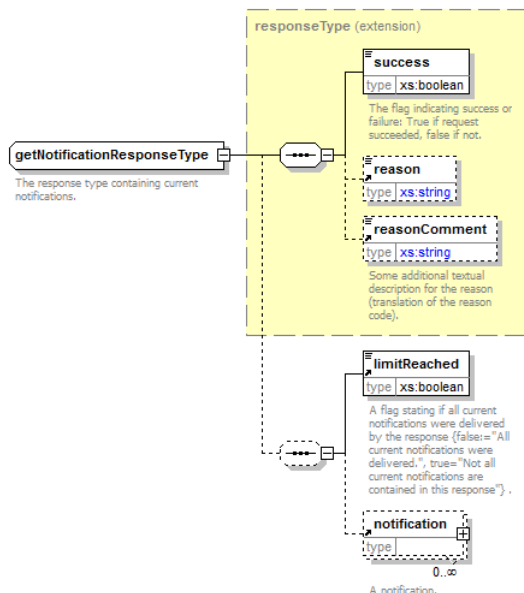

The response contains the “success” flag which indicates whether the operation succeeded or failed. In case of failure the “reason” and “reasonComment” offer additional information about the problem that occurred. The payload consists of a flag “limitReached” and a list of “notifications”. If the flag “limitReached” is true then there

are more notifications available and it is good practice to repeat the retrieval of notifications immediately until the flag is “false” instead of waiting for the next interval.

The notifications contain the fields that are common for all types of notifications and data structures that are populated depending on the object. The following picture shows the structure of a notification for a “BBCS Access” order:

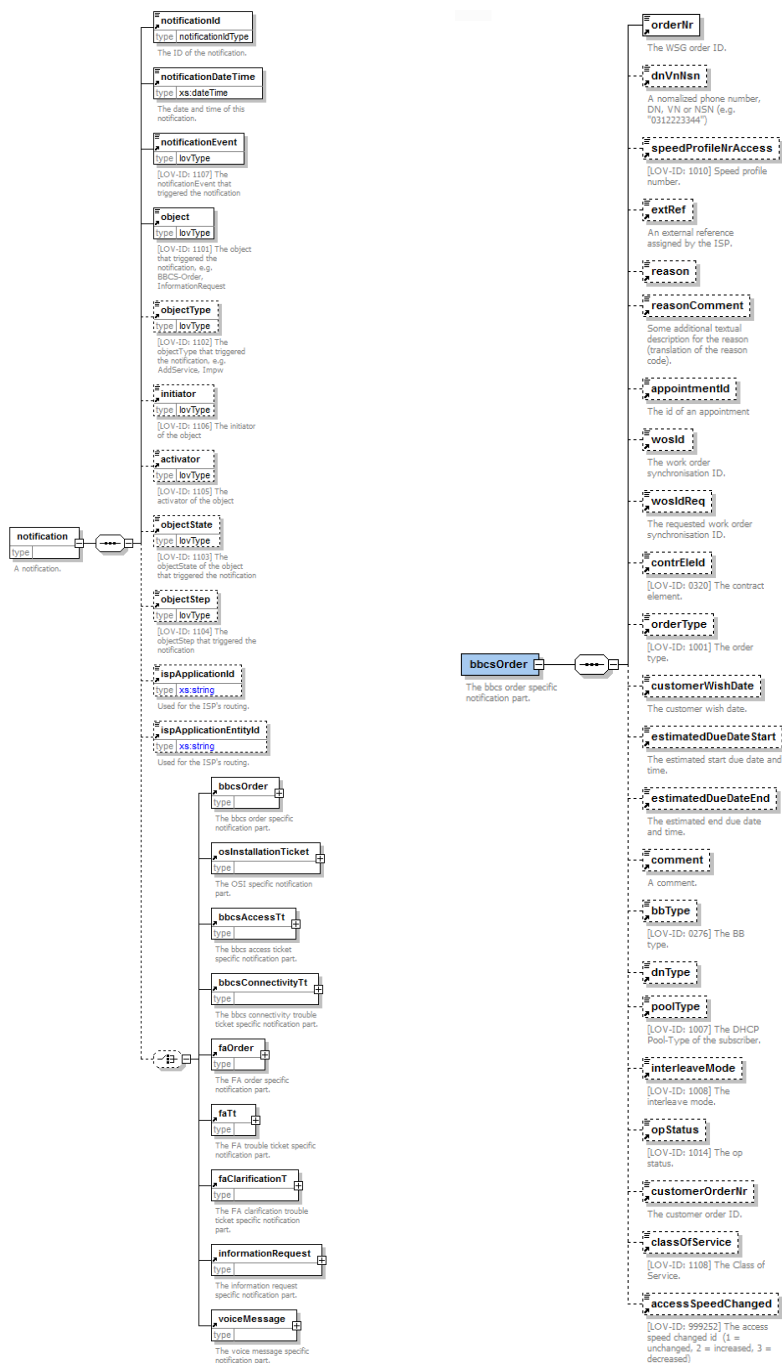

Common notification fields

Object specific fields

A sample XML for the getNotification() response:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:response>
```

```

<v20:success>true</v20:success>
<v20:limitReached>>false</v20:limitReached>
<v20:notification>
  <v20:notificationId>47408113</v20:notificationId>
  <v20:notificationDateTime>2012-08-06T12:11:52.834+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>2</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>10000820120412028889000000</v20:orderNr>
    <v20:dnVnNsn>0819336410</v20:dnVnNsn>
    <v20:contrEleId>110</v20:contrEleId>
    <v20:orderType>1</v20:orderType>
    <v20:estimatedDueDateStart>2012-12-
10T06:02:00.000+01:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2012-12-
10T12:00:00.000+01:00</v20:estimatedDueDateEnd>
    <v20:bbType>1</v20:bbType>
    <v20:customerOrderNr>10000820120412028889000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  </v20:bbcsOrder>
</v20:notification>
</v20:response>
</v20:getNotificationResponse>
</soapenv:Body>
</soapenv:Envelope>


```

3 Fulfillment (BBCS Order)

For a detailed interface definition see [3].

3.1 Process Overview

The following picture shows the interactions between the ISP's fulfillment system and WSG:

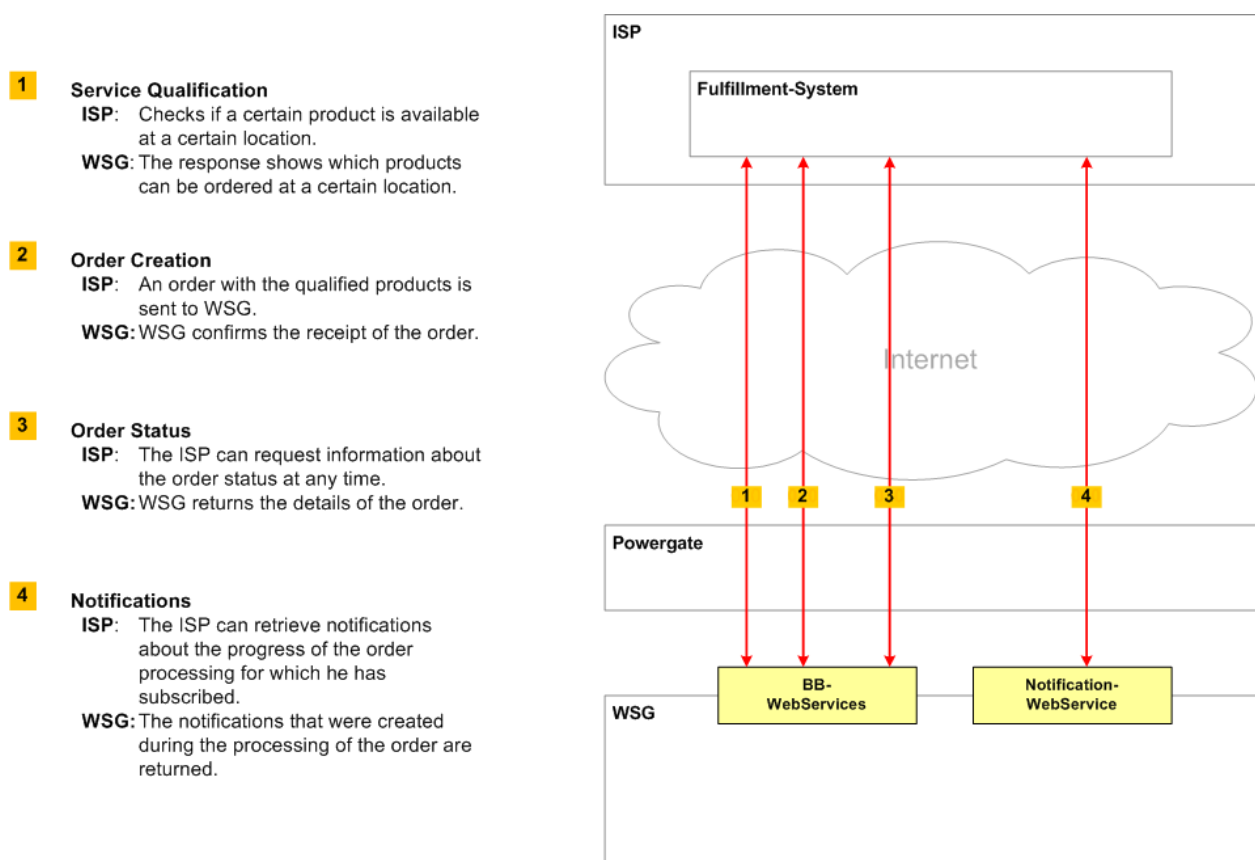

3.2 Qualification

The qualification delivers the capabilities (e.g. available speeds) of a location and should be used to determine if a certain service can be ordered at that location.

3.2.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v43:srvQualifByNumber>
      <v43:request correlationId="RegrTest T123 WS qualifByNr">
        <v43:ispId>777710</v43:ispId>
        <v43:basisContrEleId>120</v43:basisContrEleId>
        <v43:contrEleId>100</v43:contrEleId>
        <v43:bbType>2</v43:bbType>
        <v43:qualifExtRef>Regression WS qualifByNr</v43:qualifExtRef>
        <v43:customerWishDate>2019-10-03+02:00</v43:customerWishDate>
        <v43:synchWithVoice>false</v43:synchWithVoice>
        <v43:sfSlaId>1</v43:sfSlaId>
        <v43:dnVnNsn>0719875579</v43:dnVnNsn>
      </v43:request>
    </v43:srvQualifByNumber>
  </soapenv:Body>
</soapenv:Envelope>
```

3.2.2 Response

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:srvQualifByNumberResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="RegrTest T123 WS qualifByNr">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690771</v43:operationLogId>
        <v43:dnStnr>0719875579</v43:dnStnr>
        <v43:qualificationResult>
          <v43:contrEleId>120</v43:contrEleId>
          <v43:contrEleId>100</v43:contrEleId>
          <v43:bbType>2</v43:bbType>
          <v43:dnType>13</v43:dnType>
          <v43:qualifNr>147111131</v43:qualifNr>
          <v43:lineState>1</v43:lineState>
          <v43:qualifAnswer>
            <v43:qualiResultState>ok</v43:qualiResultState>
            <v43:qualiResultDetail>
              <v43:resultCode>Q00</v43:resultCode>
              <v43:resultComment>This telephone line is suitable for
xDSL.</v43:resultComment>
            </v43:qualiResultDetail>
          </v43:qualiResultDetail>
          <v43:endPoint>
            <v43:taxRegion>64</v43:taxRegion>
            <v43:accessNet>BOL</v43:accessNet>
          </v43:endPoint>
        </v43:qualificationResult>
      </v43:response>
    </v43:srvQualifByNumberResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

<v43:site>BOLQ</v43:site>
<v43:siteCategory>6</v43:siteCategory>
<v43:bbDeviceLocation>DELOC</v43:bbDeviceLocation>
<v43:availableTechnologyType>
  <v43:technologyType>2</v43:technologyType>
  <v43:technologyType>1</v43:technologyType>
</v43:availableTechnologyType>
<v43:bbPortInfo>
  <v43:dslamName>IPC-SUR710-S-VD-05</v43:dslamName>
  <v43:dslamType>3</v43:dslamType>
  <v43:bbPortNr>VDSL-1-2-1-3</v43:bbPortNr>
  <v43:bbAdslEmulated>1</v43:bbAdslEmulated>
  <v43:bbPortLineType>1</v43:bbPortLineType>
  <v43:vendor>Huawei</v43:vendor>
</v43:bbPortInfo>
</v43:endPoint>
<v43:plannedEndPoint>
  <v43:taxRegion>64</v43:taxRegion>
  <v43:accessNet>BOL</v43:accessNet>
  <v43:site>BOLP</v43:site>
  <v43:bbDeviceLocation>BOLD</v43:bbDeviceLocation>
  <v43:equippedDate>2019-11</v43:equippedDate>
  <v43:equippedDateQuality>1</v43:equippedDateQuality>
  <v43:equippedDateComment>The new endpoint will be available on 2019-
11</v43:equippedDateComment>
  <v43:equippedDateHistory>
    <v43:sortNr>3</v43:sortNr>
    <v43:changeDate>2015-09-24</v43:changeDate>
    <v43:eventType>1</v43:eventType>
    <v43:from>2015-03-21</v43:from>
    <v43:to>2015-11-21</v43:to>
    <v43:changeReasonId>3</v43:changeReasonId>
    <v43:changeReasonDescription>Missing
material</v43:changeReasonDescription>
  </v43:equippedDateHistory>
  <v43:equippedDateHistory>
    <v43:sortNr>1</v43:sortNr>
    <v43:changeDate>2015-05-12</v43:changeDate>
    <v43:eventType>2</v43:eventType>
    <v43:from>98</v43:from>
    <v43:to>3</v43:to>
    <v43:changeReasonId>6</v43:changeReasonId>
    <v43:changeReasonDescription>Management re-
priorisation</v43:changeReasonDescription>
  </v43:equippedDateHistory>
  <v43:equippedDateHistory>
    <v43:sortNr>2</v43:sortNr>
    <v43:changeDate>2015-01-31</v43:changeDate>
    <v43:eventType>2</v43:eventType>
    <v43:from>3</v43:from>
    <v43:to>98</v43:to>
    <v43:changeReasonId>6</v43:changeReasonId>
    <v43:changeReasonDescription>Management re-
priorisation</v43:changeReasonDescription>
  </v43:equippedDateHistory>
  <v43:plannedSpeed>
    <v43:up>1000</v43:up>
    <v43:down>8000</v43:down>
  </v43:plannedSpeed>
  <v43:extensionCategory>3</v43:extensionCategory>
</v43:plannedEndPoint>
<v43:cpeInfo>
  <v43:cpeName>Motorola 7347-44 POTS rel.7.9</v43:cpeName>
  <v43:dslamTypeAllowed>
    <v43:technology>1</v43:technology>

```

```

    <v43:dslamType>1</v43:dslamType>
  </v43:dslamTypeAllowed>
<v43:dslamTypeAllowed>
  <v43:technology>2</v43:technology>
  <v43:dslamType>2</v43:dslamType>
  <v43:dslamType>3</v43:dslamType>
</v43:dslamTypeAllowed>
<v43:capability>
  <v43:technologyType>2</v43:technologyType>
  <v43:capabilityOverall>1</v43:capabilityOverall>
  <v43:capabilityHardware>2</v43:capabilityHardware>
  <v43:capabilityFirmware>1</v43:capabilityFirmware>
</v43:capability>
<v43:capability>
  <v43:technologyType>1</v43:technologyType>
  <v43:capabilityOverall>3</v43:capabilityOverall>
  <v43:capabilityHardware>0</v43:capabilityHardware>
  <v43:capabilityFirmware>2</v43:capabilityFirmware>
</v43:capability>
  <v43:comment>Das ist ein Kommentar für CPE Info</v43:comment>
</v43:cpeInfo>
<v43:maxAccessSpeed>
  <v43:speedProfileNr>59</v43:speedProfileNr>
  <v43:description>50000/10000</v43:description>
  <v43:max>
    <v43:up>10000</v43:up>
    <v43:down>50000</v43:down>
  </v43:max>
  <v43:min>
    <v43:up>10000</v43:up>
    <v43:down>50000</v43:down>
  </v43:min>
  <v43:technologyType>1</v43:technologyType>
</v43:maxAccessSpeed>
<v43:averageFlag>1</v43:averageFlag>
<v43:nrOfWires>2</v43:nrOfWires>
<v43:fulfillmentTimeSlot>
  <v43:fulfillmentTimeSlotQualifIndex>1</v43:fulfillmentTimeSlotQualifIndex>
  <v43:fulfillmentTimeSlotStart>2019-10-
03T00:00:00.000+02:00</v43:fulfillmentTimeSlotStart>
  <v43:fulfillmentTimeSlotEnd>2019-10-
03T17:00:00.000+02:00</v43:fulfillmentTimeSlotEnd>
</v43:fulfillmentTimeSlot>
<v43:startPoint>
  <v43:taxRegion>64</v43:taxRegion>
  <v43:accessNet>BOL</v43:accessNet>
  <v43:unitType>3</v43:unitType>
  <v43:unitNumber>10000</v43:unitNumber>
  <v43:sse>1</v43:sse>
  <v43:contactType>1</v43:contactType>
  <v43:contactNr>62</v43:contactNr>
  <v43:upPreparation>1</v43:upPreparation>
</v43:startPoint>
<v43:address>
  <v43:street>Schönstrasse</v43:street>
  <v43:houseNr>1a</v43:houseNr>
  <v43:building>Chalet</v43:building>
  <v43:zip>307400</v43:zip>
  <v43:city>Hinterfultigen</v43:city>
</v43:address>
<v43:resourceAvailability>
  <v43:available>true</v43:available>
  <v43:resourceType>1</v43:resourceType>
</v43:resourceAvailability>
<v43:resourceAvailability>

```

```

<v43:available>true</v43:available>
<v43:resourceType>2</v43:resourceType>
<v43:upgradePlanDateTime>2013-11-
11T00:00:00.000+01:00</v43:upgradePlanDateTime>
</v43:resourceAvailability>
<v43:qualifProfile>
  <v43:qualifIndex>10</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>240</v43:speedProfileNr>
    <v43:description>max2000/200</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>200</v43:up>
    <v43:down>2000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>11</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>248</v43:speedProfileNr>
    <v43:description>max2000/400</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>400</v43:up>
    <v43:down>2000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>12</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>

```

```

        <v43:down>5000</v43:down>
    </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
    <v43:speedProfileNr>249</v43:speedProfileNr>
    <v43:description>max2000/2000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>2000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>13</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>203</v43:speedProfileNr>
        <v43:description>max5000/500</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>14</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>253</v43:speedProfileNr>
        <v43:description>max5000/1000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>1000</v43:up>
        <v43:down>5000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>15</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>

```

```

        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>254</v43:speedProfileNr>
        <v43:description>max5000/5000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>5000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>16</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>255</v43:speedProfileNr>
        <v43:description>max8000/800</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>800</v43:up>
        <v43:down>8000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>17</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>256</v43:speedProfileNr>
        <v43:description>max8000/1600</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>1600</v43:up>
        <v43:down>8000</v43:down>
    </v43:effectiveSpeed>

```

```
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>18</v43:qualifIndex>
  <v43:nOfWires>2</v43:nOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>257</v43:speedProfileNr>
    <v43:description>max8000/8000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>8000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>19</v43:qualifIndex>
  <v43:nOfWires>2</v43:nOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>209</v43:speedProfileNr>
    <v43:description>max10000/1000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>1000</v43:up>
    <v43:down>10000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>20</v43:qualifIndex>
  <v43:nOfWires>2</v43:nOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
```

```
<v43:serviceSpeed>
  <v43:speedProfileNr>258</v43:speedProfileNr>
  <v43:description>max10000/2000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>10000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>21</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>259</v43:speedProfileNr>
    <v43:description>max10000/10000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>10000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>22</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>207</v43:speedProfileNr>
    <v43:description>max15000/1500</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>1500</v43:up>
    <v43:down>15000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>23</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
```

```

        <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
    </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
    <v43:speedProfileNr>261</v43:speedProfileNr>
    <v43:description>max15000/3000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>15000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>24</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>262</v43:speedProfileNr>
        <v43:description>max15000/15000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>15000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>25</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>230</v43:speedProfileNr>
        <v43:description>max20000/2000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>

```

```

<v43:qualifIndex>26</v43:qualifIndex>
<v43:nrofWires>2</v43:nrofWires>
<v43:usedAccessSpeed>
  <v43:speedProfileNr>170</v43:speedProfileNr>
  <v43:description>5000-18000/500-2000</v43:description>
  <v43:max>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:max>
  <v43:min>
    <v43:up>500</v43:up>
    <v43:down>5000</v43:down>
  </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
  <v43:speedProfileNr>263</v43:speedProfileNr>
  <v43:description>max20000/4000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>27</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>264</v43:speedProfileNr>
    <v43:description>max20000/20000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>28</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>265</v43:speedProfileNr>
    <v43:description>max25000/2500</v43:description>
  </v43:serviceSpeed>

```

```

</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>29</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>266</v43:speedProfileNr>
    <v43:description>max25000/5000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>30</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>284</v43:speedProfileNr>
    <v43:description>max25000/25000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>31</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>

```

```

        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
    </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
    <v43:speedProfileNr>237</v43:speedProfileNr>
    <v43:description>max30000/3000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>32</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>267</v43:speedProfileNr>
        <v43:description>max30000/6000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>33</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>285</v43:speedProfileNr>
        <v43:description>max30000/30000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>34</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>

```

```

<v43:speedProfileNr>170</v43:speedProfileNr>
<v43:description>5000-18000/500-2000</v43:description>
<v43:max>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:max>
<v43:min>
  <v43:up>500</v43:up>
  <v43:down>5000</v43:down>
</v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
  <v43:speedProfileNr>260</v43:speedProfileNr>
  <v43:description>max40000/4000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>35</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>272</v43:speedProfileNr>
    <v43:description>max40000/8000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>36</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>286</v43:speedProfileNr>
    <v43:description>max40000/40000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>

```

```

        <v43:down>18000</v43:down>
      </v43:effectiveSpeed>
    </v43:qualifProfile>
  <v43:qualifProfile>
    <v43:qualifIndex>37</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
      <v43:speedProfileNr>170</v43:speedProfileNr>
      <v43:description>5000-18000/500-2000</v43:description>
      <v43:max>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
      </v43:max>
      <v43:min>
        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
      </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
      <v43:speedProfileNr>242</v43:speedProfileNr>
      <v43:description>max50000/5000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
  </v43:qualifProfile>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>38</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>246</v43:speedProfileNr>
    <v43:description>max50000/10000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>39</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>246</v43:speedProfileNr>
    <v43:description>max50000/10000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
</v43:qualifProfile>

```

```

</v43:usedAccessSpeed>
<v43:serviceSpeed>
  <v43:speedProfileNr>287</v43:speedProfileNr>
  <v43:description>max50000/50000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>40</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>270</v43:speedProfileNr>
    <v43:description>max60000/6000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>41</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>273</v43:speedProfileNr>
    <v43:description>max60000/12000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>42</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>

```

```

        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
    </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
    <v43:speedProfileNr>679</v43:speedProfileNr>
    <v43:description>max60000/60000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>43</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>271</v43:speedProfileNr>
        <v43:description>max80000/8000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>44</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>274</v43:speedProfileNr>
        <v43:description>max80000/16000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>

```

```

<v43:qualifProfile>
  <v43:qualifIndex>45</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>288</v43:speedProfileNr>
    <v43:description>max80000/80000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>46</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>244</v43:speedProfileNr>
    <v43:description>max100000/10000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>47</v43:qualifIndex>
  <v43:nrOfWires>2</v43:nrOfWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>247</v43:speedProfileNr>

```

```
<v43:description>max100000/20000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>48</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>289</v43:speedProfileNr>
    <v43:description>max100000/100000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>49</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>278</v43:speedProfileNr>
    <v43:description>max200000/20000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>50</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
```

```

        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>276</v43:speedProfileNr>
        <v43:description>max200000/40000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>51</v43:qualifIndex>
    <v43:nrOfWires>2</v43:nrOfWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>680</v43:speedProfileNr>
        <v43:description>max200000/200000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>52</v43:qualifIndex>
    <v43:nrOfWires>2</v43:nrOfWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>279</v43:speedProfileNr>
        <v43:description>max250000/25000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>53</v43:qualifIndex>
    <v43:nrOfWires>2</v43:nrOfWires>

```

```

<v43:usedAccessSpeed>
  <v43:speedProfileNr>170</v43:speedProfileNr>
  <v43:description>5000-18000/500-2000</v43:description>
  <v43:max>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:max>
  <v43:min>
    <v43:up>500</v43:up>
    <v43:down>5000</v43:down>
  </v43:min>
</v43:usedAccessSpeed>
<v43:serviceSpeed>
  <v43:speedProfileNr>280</v43:speedProfileNr>
  <v43:description>max250000/50000</v43:description>
</v43:serviceSpeed>
<v43:effectiveSpeed>
  <v43:up>2000</v43:up>
  <v43:down>18000</v43:down>
</v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>54</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>281</v43:speedProfileNr>
    <v43:description>max300000/30000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>
    <v43:up>2000</v43:up>
    <v43:down>18000</v43:down>
  </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
  <v43:qualifIndex>55</v43:qualifIndex>
  <v43:nrofWires>2</v43:nrofWires>
  <v43:usedAccessSpeed>
    <v43:speedProfileNr>170</v43:speedProfileNr>
    <v43:description>5000-18000/500-2000</v43:description>
    <v43:max>
      <v43:up>2000</v43:up>
      <v43:down>18000</v43:down>
    </v43:max>
    <v43:min>
      <v43:up>500</v43:up>
      <v43:down>5000</v43:down>
    </v43:min>
  </v43:usedAccessSpeed>
  <v43:serviceSpeed>
    <v43:speedProfileNr>282</v43:speedProfileNr>
    <v43:description>max300000/60000</v43:description>
  </v43:serviceSpeed>
  <v43:effectiveSpeed>

```

```

        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>56</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>283</v43:speedProfileNr>
        <v43:description>max500000/50000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:qualifProfile>
    <v43:qualifIndex>57</v43:qualifIndex>
    <v43:nrofWires>2</v43:nrofWires>
    <v43:usedAccessSpeed>
        <v43:speedProfileNr>170</v43:speedProfileNr>
        <v43:description>5000-18000/500-2000</v43:description>
        <v43:max>
            <v43:up>2000</v43:up>
            <v43:down>18000</v43:down>
        </v43:max>
        <v43:min>
            <v43:up>500</v43:up>
            <v43:down>5000</v43:down>
        </v43:min>
    </v43:usedAccessSpeed>
    <v43:serviceSpeed>
        <v43:speedProfileNr>277</v43:speedProfileNr>
        <v43:description>max500000/100000</v43:description>
    </v43:serviceSpeed>
    <v43:effectiveSpeed>
        <v43:up>2000</v43:up>
        <v43:down>18000</v43:down>
    </v43:effectiveSpeed>
</v43:qualifProfile>
<v43:currentDnType>13</v43:currentDnType>
<v43:currentAccessSpeed>
    <v43:speedProfileNr>180</v43:speedProfileNr>
    <v43:description>5000-33000/500-10000</v43:description>
    <v43:max>
        <v43:up>10000</v43:up>
        <v43:down>33000</v43:down>
    </v43:max>
    <v43:min>
        <v43:up>500</v43:up>
        <v43:down>5000</v43:down>
    </v43:min>
    <v43:technologyType>1</v43:technologyType>

```

```

</v43:currentAccessSpeed>
<v43:llId>0030719875579</v43:llId>
<v43:jumperAction>>false</v43:jumperAction>
<v43:potentialAvailable>1</v43:potentialAvailable>
<v43:reasonOfPotential>
  <v43:potential>
    <v43:potentialCode>1000</v43:potentialCode>
    <v43:potentialDescription>outstanding
upgrooming</v43:potentialDescription>
  </v43:potential>
  <v43:potential>
    <v43:potentialCode>1002</v43:potentialCode>
    <v43:potentialDescription>old CPE Hardware</v43:potentialDescription>
  </v43:potential>
</v43:reasonOfPotential>
<v43:technologyType>1</v43:technologyType>
<v43:lineState>1</v43:lineState>
<v43:vectorized>>false</v43:vectorized>
<v43:siteDevelopment>
  <v43:fullyDeveloped>>true</v43:fullyDeveloped>
  <v43:nrofBasicConnectivities>10</v43:nrofBasicConnectivities>
  <v43:nrofUtilisationUnits>20</v43:nrofUtilisationUnits>
  <v43:nrofLinesTotal>25</v43:nrofLinesTotal>
  <v43:nrofLinesUsable>15</v43:nrofLinesUsable>
</v43:siteDevelopment>
<v43:swisscomReady>>true</v43:swisscomReady>
<v43:psdClass>20</v43:psdClass>
<v43:interleaveMode>2</v43:interleaveMode>
</v43:qualifAnswer>
</v43:qualificationResult>
</v43:response>
</v43:srvQualifByNumberResponse>
</soapenv:Body>
</soapenv:Envelope>

```

3.3 Customer order creation

3.3.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v43:createCustomerOrder>
      <v43:request correlationId="Regression WS Standalone">
        <v43:ispId>777710</v43:ispId>
        <v43:qualification>
          <v43:qualifNr>147111131</v43:qualifNr>
          <v43:qualifIndex>10</v43:qualifIndex>
          <v43:fulfillmentTimeSlotQualifIndex>1</v43:fulfillmentTimeSlotQualifIndex>
        </v43:qualification>
        <v43:creationType>1</v43:creationType>
        <v43:dnVnNsn>0719875579</v43:dnVnNsn>
        <v43:order xsi:type="v43:createType" correlationId="1">

```

```
<v43:contrEleId>120</v43:contrEleId>
<v43:extRef>Regression WS</v43:extRef>
<v43:layer2>
  <v43:bbType>2</v43:bbType>
  <v43:sessionType>2</v43:sessionType>
</v43:layer2>
<v43:processWithLowPriority>false</v43:processWithLowPriority>
</v43:order>
<v43:order xsi:type="v43:addType" correlationId="2">
  <v43:contrEleId>100</v43:contrEleId>
  <v43:extRef>Regression SrvAdd Internet</v43:extRef>
  <v43:speedProfileNrReq>240</v43:speedProfileNrReq>
  <v43:processWithLowPriority>false</v43:processWithLowPriority>
</v43:order>
</v43:request>
</v43:createCustomerOrder>
</soapenv:Body>
</soapenv:Envelope>
```

3.3.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrderResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS Standalone">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690774</v43:operationLogId>
        <v43:customerOrderNr>77771020191002000086000000</v43:customerOrderNr>
        <v43:nsn>0106000013</v43:nsn>
        <v43:orderItem correlationId="1">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000085000000</v43:orderNr>
        </v43:orderItem>
        <v43:orderItem correlationId="2">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000087000000</v43:orderNr>
        </v43:orderItem>
      </v43:response>
    </v43:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.3.3 GUI

The orders created are visible in the BBCS Access Service GUI:

77771020170522000034000000 SRV_ADD	COMPLETED	0108728519	22/05/2017	22/05/2017	22/05/2017 11:00	22/05/2017 13:00	22/05/2017 10:53:56.311	Best Effort	VDSL	Netservices number
77771020170522000032000000 BBCS_CREATE	COMPLETED	0108728519	22/05/2017	22/05/2017	22/05/2017 11:00	22/05/2017 13:00	22/05/2017 10:43:51.906	BBCS_Standalone	VDSL	Netservices number

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Detail Order

Main

Services

CPE Info

Order Info

Order Type

BBCS_GETSTATUS

Order State

COMPLETED

Creation Type

New

Response

-

SI Exempt Prio

-

Delivery Notification

-

ISP / Order Nr Info

ISP

777710 Testaccount WSG Team

Customer Order Nr

77771020190502000019000000

Order Nr

77771020190502000019000000

Order Group Nr

-

WOS ID

WOS ID (Requested) -

WOS ID -

References

External Reference

Regression WS

Internal Reference

-

Layer 1 / Basis

Contr Element

BBCS_on_TOM

Level Of Supp

Standard

Layer 2

BB Type

VDSL

BB ADSL Emulated

No

Session Type

DHCP

Termination

@FWS

Interleave Mode

Interleave Medium

Pool Type

-

Access Speed

50000 down / 10000 up

Access Speed Changed

-

Op Status

Open Pipe Measure

Layer 2 / Cable Box

UP Board Nr

334

UP Switching Place Nr

0

UP Type of Contact

UPK

UP Contact Nr

1

UP Coordinate X

-

UP Coordinate Y

-

BB Port

04-540

Layer 2 / Address / Starting Point

Region

-

Billing Zone

-

Street, Nr, Building

-

ZIP, City

-

Starting Point

64-BRE:3:334-0

Contact Type

1

Contact Number

1

BB Number Of Wires

2

Reason of Potential

-

Further Details

Appointment Id

-

Appointment Date/Time

-

Modem Owner

Unknown

Calculated max. Bitrate

-

Onsite Support

-

BB Access

-

Measured max. Bitrate

-

Self Install

-

Comment

Last Comment

History

User name	Order State	DN (STNR) / VN / NSN	Response	Transaction Date/Time	BB Type	Speed Profile Nr	Comment	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End
Fal	COMPLETED	0719875577		02/05/2018 10:30:05.500	VDSL			02/05/2018	02/05/2018 00:00	02/05/2018 00:00
ISP User	ENTERED	0719875577		02/05/2018 10:30:05.500				02/05/2018	02/05/2018 00:00	02/05/2018 00:00

3.3.4 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for which shows all notifications produced during the processing of the orders above .

3.4 Modification of Base Product (Access) and Addition of Streaming Service

Existing subscriptions can be modified to satisfy the new needs of a customer. In this example the Streaming service (TV) is added to an existing subscription. Note that this addition makes it necessary to modify the Base Product's session type to "DHCP" and the BB type to "VDSL". Please note you need to perform a qualification beforehand to create a modification.

3.4.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v43:createCustomerOrder>
      <v43:request correlationId="Regression WS change Type">
        <v43:ispId>777710</v43:ispId>
        <v43:creationType>1</v43:creationType>
        <v43:dnVnNsn>0719875579</v43:dnVnNsn>
        <v43:order xsi:type="v43:modifyType" correlationId="1">
          <v43:extRef>extRef RegressionWs modify Type</v43:extRef>
          <v43:layer2>
            <v43:bbType>2</v43:bbType>
            <v43:sessionType>2</v43:sessionType>
          </v43:layer2>
          <v43:processWithLowPriority>false</v43:processWithLowPriority>
        </v43:order>
        <v43:order xsi:type="v43:addType" correlationId="2">
          <v43:contrEleId>9</v43:contrEleId>
          <v43:extRef>extRef RegressionSrvTst</v43:extRef>
          <v43:speedProfileNrReq>0</v43:speedProfileNrReq>
          <v43:processWithLowPriority>false</v43:processWithLowPriority>
        </v43:order>
      </v43:request>
    </v43:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.4.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrderResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS change Type">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690775</v43:operationLogId>
        <v43:customerOrderNr>77771020191002000089000000</v43:customerOrderNr>
        <v43:orderItem correlationId="1">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000088000000</v43:orderNr>
        </v43:orderItem>
        <v43:orderItem correlationId="2">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000090000000</v43:orderNr>
        </v43:orderItem>
      </v43:response>
    </v43:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.4.3 GUI

The following Screenshots show the Service Status of a subscriber after both orders are completed:

Order Info Order Type BBBS_GETSTATUS Order State COMPLETED Creation Type New Response - SF Exeprt Prio - Delivery Notification -		DN Info DN / VN / NSN (Requested) 0108410750 DN (STNR) / VN / NSN 0108410750 STNR DOI - Dn Type NetServices number		Current Endpoint DN Office 64BOL BB Device Location BOL Site BOL Site Category RUG Available Technology Type VDSL2, VDSL Vectoring DSLAM Name IPC-SURT10-S-DM-04 Dslam Type CAN Technology Type VDSL2 Vectorized No						
ISP / Order Nr Info ISP 999999 OM Customer Order Nr 99999920170210000047000000 Order Nr 99999920170210000047000000 Order Group Nr -		Date Info Customer Wish Date 10/02/2017 Estimated Due Date/Time Start 10/02/2017 00:00 Estimated Due Date/Time End 10/02/2017 00:00 Termination Date -								
WOS ID WOS ID (Requested) - WOS ID -		Qualification Info Qualification Nr - Qualification Index - Fulfillment Time Slot Index -								
References External Reference - Internal Reference -										
Layer 1 / Basis Contr Element BBBS_StandaloneLevel Of Supp Standard										
Layer 2 (NPA/TIBCO) BB Type VDSL BB ADSL Emulated No Session Type DHCP Termination @FWS Interleave Mode Interleave Low Pool Type pool1 Access Speed 50000 down / 10000 up Access Speed Changed - Op Status Open Pipe Manual		Layer 2 (APV) / Cable Box UP Board Nr 334 UP Switching Place Nr 0 UP Type of Contact UPK UP Contact Nr 1 UP Coordinate X 200100 UP Coordinate Y 600100 Jumper Action - BB Port 04-840		Layer 2 (LQS) / Address / Starting Point Region - Billing Zone - Street, Nr, Building - ZIP, City - Gaia Id 1238442 Starting Point 64-BOL-3.334-0 Contact Type 1 Contact Number 1 BB Number Of Wires 2 Reason of Potential 1000 - Pending upgrooming						
Further Details Appointment Id - Calculated max. Bitrate - Measured max. Bitrate -		Appointment Date/Time - Onsite Support - Self Install -		Modem Owner Unknown BB Access -						
Comment Last Comment ISP 777710 - Testaccount WSG Team										
History										
User nameOrder StateDN (STNR) / VN / NSNResponseTransaction Date/TimeBB TypeSpeed Profile NrCommentCustomer Wish DateEstimated Due Date/Time StartEstimated Due Date/Time End										
Detail	Pol	COMPLETED	0108410750	10/02/2017 11:33:12.000	VDSL		ISP 777710 - Testaccount WSG Team	10/02/2017	10/02/2017 00:00	10/02/2017 00:00
Detail	Swisscom SPOC	ENTERED	0108410750	10/02/2017 11:33:11.539				10/02/2017	10/02/2017 00:00	10/02/2017 00:00

3.4.4 Order Details

If, at any stage of the processing, the data retrieved via the Notification Service is not sufficient, then all of the order data can be retrieved by using the "getOrderDetail" operation of the Web service.

3.4.5 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for which shows all notifications produced during the processing of the orders above .

3.5 Change of Best Effort Service (Speed) and Reduction of Streaming Service

It is also possible to only change services and leave the Base Product as it is. The following example changes the speed of the Internet and removes the Streaming Service.

3.5.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v43:createCustomerOrder>
      <v43:request correlationId="Regression WS change Type">
        <v43:ispId>777710</v43:ispId>
        <v43:creationType>1</v43:creationType>
        <v43:dnVnNsn>0719875579</v43:dnVnNsn>
        <v43:order xsi:type="v43:changeType" correlationId="1">
          <v43:contrEleId>100</v43:contrEleId>
          <v43:extRef>extRef RegressionWs change Type</v43:extRef>
          <v43:speedProfileNrReq>209</v43:speedProfileNrReq>
        </v43:order>
        <v43:order xsi:type="v43:reduceType" correlationId="2">
          <v43:contrEleId>9</v43:contrEleId>
          <v43:extRef>extRef RegressionSrvTst</v43:extRef>
        </v43:order>
      </v43:request>
    </v43:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrderResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS change Type">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690780</v43:operationLogId>
        <v43:customerOrderNr>77771020191002000093000000</v43:customerOrderNr>
        <v43:orderItem correlationId="1">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000091000000</v43:orderNr>
        </v43:orderItem>
        <v43:orderItem correlationId="2">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000092000000</v43:orderNr>
        </v43:orderItem>
      </v43:response>
    </v43:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.5.2.1 GUI

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Detail Order			
Main Services CPE Info			
Order Info Order Type: BBSC_GETSTATUS Order State: COMPLETED Creation Type: New Response: - SF Exept Prio: - Delivery Notification: -		DN Info DN / VN / NSN (Requested): 0719875577 DN (STNR) / VN / NSN: 0719875577 STNR DDI: - Dn Type: Economy Line Date Info Customer Wish Date: 02/05/2016 Estimated Due Date/Time Start: 02/05/2016 00:00 Estimated Due Date/Time End: 02/05/2016 00:00 Termination Date: - Qualification Info Qualification Nr: - Qualification Index: - Fulfillment Time Slot Index: -	
ISP / Order Nr Info ISP: 777710 Testaccount WSG Team Customer Order Nr: 77771020180502000100000000 Order Nr: 77771020180502000100000000 Order Group Nr: -		Current Endpoint DN Office: 04BRE BB Device Location: BRE Site: BRE Site Category: RUS Available Technology Type: VDSL Vectoring DSLAM Name: ipo-huq4w5-svid-01 Dslam Type: CAN Technology Type: VDSL Vectoring Vectorized: Yes	
WOS ID WOS ID (Requested): - WOS ID: -			
References External Reference: - Internal Reference: -			
Layer 1 / Basis Contr Element: BBSC_on_TDM Level Of Supp: Standard			
Layer 2 BB Type: VDSL BB ADSL Emulated: No Session Type: DHCP Termination: @FWS Interleave Mode: Interleave Medium Pool Type: - Access Speed: 50000 down / 10000 up Access Speed Changed: - Op Status: Open Pipe Measure		Layer 2 / Cable Box UP Board Nr: 334 UP Switching Place Nr: 0 UP Type of Contact: UPK UP Contact Nr: 1 UP Coordinate X: - UP Coordinate Y: - BB Port: 04-540	
Layer 2 / Address / Starting Point Region: - Billing Zone: - Street, Nr, Building: - ZIP, City: - Starting Point: 04-BRE:3:334:0 Contact Type: 1 Contact Number: 1 BB Number Of Wires: 2 Reason of Potential: -			
Further Details Appointment Id: - Calculated max. Bitrate: - Measured max. Bitrate: - Appointment Date/Time: - Onsite Support: - Self Install: - Modem Owner: Unknown BB Access: -			
Comment Last Comment: -			

3.5.3 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service.

See Appendix A: Notifications created for which shows all notifications produced during the processing of the orders above.

3.6 Change of Internet Service Provider

It is possible to change the internet service provider for a subscription. The following example shows a change of the ISP from 100008 to 777710. Note: a prior qualification is needed. See 3.2.

3.6.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrder>
      <v43:request correlationId="Regression WS change ISP">
        <v43:ispId>777710</v43:ispId>
        <v43:creationType>1</v43:creationType>
        <v43:qualification>
          <v43:qualifNr>147111132</v43:qualifNr>
          <v43:qualifIndex>10</v43:qualifIndex>
        </v43:qualification>
        <v43:dnVnNsn>0108261922</v43:dnVnNsn>
        <v43:order xsi:type="v43:ispChangeType" correlationId="1"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
          <v43:extRef>isptest</v43:extRef>
          <v43:customerWishDate>2019-10-03+02:00</v43:customerWishDate>
          <v43:comment>WS-Tutorial</v43:comment>
          <v43:layer2>
            <v43:bbType>2</v43:bbType>
            <v43:sessionType>2</v43:sessionType>
            <v43:termination>2</v43:termination>
            <v43:poolType>pool1</v43:poolType>
          </v43:layer2>
          <v43:selfInstall>1</v43:selfInstall>
          <v43:sla>
            <v43:sfSlaId>1</v43:sfSlaId>
            <v43:saSlaId>1</v43:saSlaId>
          </v43:sla>
        </v43:order>
      </v43:request>
    </v43:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrderResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS change ISP">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690790</v43:operationLogId>
        <v43:customerOrderNr>77771020191002000097000000</v43:customerOrderNr>
        <v43:orderItem correlationId="1">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000096000000</v43:orderNr>
        </v43:orderItem>
      </v43:response>
    </v43:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

3.6.3 Notifications

During the whole processing, the orders can be tracked by retrieving notifications from the Notification Service. See Appendix A: Notifications created for which shows all notifications produced during the processing of the orders above.

3.7 Deprovisioning (Disconnect)

If the BBCS subscription is no longer needed it can be deprovisioned as shown in the following example.

3.7.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
  instance">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v43:createCustomerOrder>
      <v43:request correlationId="Regression WS Disconnect">
        <v43:ispId>777710</v43:ispId>
        <v43:creationType>1</v43:creationType>
        <v43:dnVnNsn>0719875579</v43:dnVnNsn>
        <v43:order xsi:type="v43:disconnectType" correlationId="1">
          <v43:extRef>Regression WS</v43:extRef>
        </v43:order>
      </v43:request>
    </v43:createCustomerOrder>
  </soapenv:Body>
</soapenv:Envelope>
```

3.7.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:createCustomerOrderResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS Disconnect">
        <v43:success>true</v43:success>
        <v43:operationLogId>432690799</v43:operationLogId>
        <v43:customerOrderNr>77771020191002000099000000</v43:customerOrderNr>
        <v43:orderItem correlationId="1">
          <v43:success>true</v43:success>
          <v43:orderNr>77771020191002000098000000</v43:orderNr>
        </v43:orderItem>
      </v43:response>
    </v43:createCustomerOrderResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

GUI

The following Screenshots show the Service Status of the subscriber after both orders are completed:

Service Status

ISP 777710 Testaccount WSG Team

DN / VN / NSN * (0314445588)

Service Status

Operation failed

Message No broadband access or service found

3.8 Products, Restrictions and Dependencies

"Swisscom Wholesale" offers some products (also known as "Contract Elements") which can be ordered by an ISP/PTS. The description of these products/Contract Elements is available in the appropriate marketing documentation and also contains some business restrictions.

The following chapters give you an overview of the orderable products and some restrictions/dependencies which are important in the order process.

3.8.1 List of Contract Elements (Swisscom Wholesale Products)

CE-Id	Contract Element	CE-Type	possible BB-Types	mandatory Service	Add-on Services	Fulfillment SLA	Assurance SLA
110	BBCS-on-TDM	BBCS-Basis	ADSL, VDSL	Best Effort	Streaming, RealTime	Basic	Standard
120	BBCS-Standalone	BBCS-Basis	ADSL, VDSL, SDSL	Best Effort	Streaming (not SDSL); RealTime	Basic,	Standard
100	Best Effort	BBCS-Service	ADSL, VDSL, SDSL	n/a	n/a	Basic,	Standard, Plus *
9	Streaming	BBCS-Service (Add-on)	ADSL, VDSL	n/a	n/a	Premium	Intermediate, Plus
12	Real Time	BBCS-Service (Add-on)	ADSL, VDSL, SDSL	n/a	n/a	Basic	Standard
420	BBCS-F (Fiber)	BBCS-Basis	BX	Best Effort on Fiber	n/a	Basic	Standard
101	Best Effort on Fiber	BBCS-Service	BX	n/a	Attribut "Class-of-Service"	Basic	Standard, Plus *
19	Full-Access	FA (ULL)	(1 - 9)	n/a	n/a	Basic	Standard
22	Full-Access Subloop	FA (ULL)	(1 - 9)	n/a	n/a	Basic	Standard

* For the Contract-Element "Best Effort" the Fulfillment-SLA und the Assurance-SLA depend on the chosen service speed

3.8.2 Restrictions and Dependencies

- a) The BBCS copper basis products "BBCS-on-TDM" and "BBCS-Standalone" must always be provisioned with the BBCS service product "Best Effort".
- b) The BBCS base product is without any BBCS service product is known as "Bit-Stream-Access" and cannot be ordered via B2B interface.
- c) The BBCS BB-Type "SDSL" is only possible on "BBCS-Standalone" (not possible on "BBCS-on-TDM").
- d) The BBCS add-on services "Streaming (TV)" and "realtime" require a session type "DHCP" and a termination "@FWS" which must be implemented (created or modified) on the base service (If using only the "Best Effort" service, the usual session type is "PPP" and the termination is "@ISP").
- e) The BBCS fiber base product "BBCS-F" is only possible with the BB-type "BX" and the session type "DHCP" and requires the mandatory (and only possible) service "Best Effort on Fiber"; this service can be provided with "Class-of-Service" which enables the ISP/PTS to implement its own "add-on services".
- f) The ULL (unbundling local loop) products "Full-Access" and "Full-Access Subloop" are layer 1 only implementations which cannot have any services.

3.9 Get Order Detail

3.9.1 Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:getOrderDetail>
      <v43:request correlationId="Regression WS Get Order Detail">
        <v43:ispId>777710</v43:ispId>
        <v43:orderNr>77771020181031000009000000</v43:orderNr>
      </v43:request>
    </v43:getOrderDetail>
  </soapenv:Body>
</soapenv:Envelope>
```

3.9.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
  <soapenv:Header/>
  <soapenv:Body>
    <v43:getOrderDetailResponse xmlns:v43="http://www.swisscom.com/wsg/bb/v43">
      <v43:response correlationId="Regression WS Get Order Detail">
        <v43:success>true</v43:success>
        <v43:customerOrder>
          <v43:ispId>777710</v43:ispId>
          <v43:ispName>Testaccount WSG Team</v43:ispName>
          <v43:customerOrderNr>77771020181031000008000000</v43:customerOrderNr>
          <v43:extRef>extRef RegressionSrvTst</v43:extRef>
          <v43:dnVnNsn>0719875579</v43:dnVnNsn>
          <v43:creationType>1</v43:creationType>
          <v43:order>
            <v43:serviceOrder>
              <v43:creationType>1</v43:creationType>
              <v43:orderNr>77771020181031000009000000</v43:orderNr>
              <v43:contrEleId>9</v43:contrEleId>
              <v43:orderType>13</v43:orderType>
              <v43:orderState>1</v43:orderState>
              <v43:customerWishDate>2018-10-31+01:00</v43:customerWishDate>
              <v43:estimatedDueDateTimeStart>2018-10-31T10:00:00.000+01:00</v43:estimatedDueDateTimeStart>
              <v43:estimatedDueDateTimeEnd>2018-10-31T12:00:00.000+01:00</v43:estimatedDueDateTimeEnd>
              <v43:transDateTime>2018-10-31T09:13:45.182+01:00</v43:transDateTime>
              <v43:extRef>extRef RegressionSrvTst</v43:extRef>
              <v43:sla>
                <v43:sfSlaId>1</v43:sfSlaId>
                <v43:saSlaId>4</v43:saSlaId>
              </v43:sla>
              <v43:speedProfile>
                <v43:speedProfileNr>0</v43:speedProfileNr>
              </v43:speedProfile>
              <v43:speedProfileReq>
                <v43:speedProfileNr>0</v43:speedProfileNr>
              </v43:speedProfileReq>
              <v43:history>
                <v43:orderState>1</v43:orderState>
                <v43:customerWishDate>2018-10-31+01:00</v43:customerWishDate>
                <v43:estimatedDueDateTimeStart>2018-10-31T10:00:00.000+01:00</v43:estimatedDueDateTimeStart>
                <v43:estimatedDueDateTimeEnd>2018-10-31T12:00:00.000+01:00</v43:estimatedDueDateTimeEnd>
              </v43:history>
            </v43:serviceOrder>
          </v43:order>
        </v43:customerOrder>
      </v43:response>
    </v43:getOrderDetailResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

        <v43:transDateTime>2018-10-31T09:13:45.182+01:00</v43:transDateTime>
        <v43:extRef>extRef RegressionSrvTst</v43:extRef>
        <v43:sla>
            <v43:sfSlaId>1</v43:sfSlaId>
            <v43:saSlaId>4</v43:saSlaId>
        </v43:sla>
        <v43:speedProfile>
            <v43:speedProfileNr>0</v43:speedProfileNr>
        </v43:speedProfile>
        <v43:speedProfileReq>
            <v43:speedProfileNr>0</v43:speedProfileNr>
        </v43:speedProfileReq>
        </v43:history>
        </v43:serviceOrder>
        </v43:order>
        </v43:customerOrder>
        </v43:response>
        </v43:getOrderDetailResponse>
    </soapenv:Body>
</soapenv:Envelope>

```

4 Fulfillment (ULL Orders)

For a detailed interface definition see [5].

For a process overview see chapter 3.1.

4.1 Qualification

The qualification delivers the capabilities (e.g. available speeds) of a location and should be used to determine if a certain service can be ordered at that location. The following example shows a qualification for an address without Full Access

4.1.1 Request

```

<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v16:qualifyByAddress>
      <v16:request correlationId="--- WS faQualifyByAddress">
        <v16:ptsId>777710</v16:ptsId>
        <v16:contrEleId>19</v16:contrEleId>
        <v16:customerWishDateTime>2010-12-08T15:58:01+02:00</v16:customerWishDateTime>
        <v16:extRef>Regr Test FA QualifByAddr</v16:extRef>
        <v16:faTechnology>1</v16:faTechnology>
        <v16:faTechnology>2</v16:faTechnology>
        <v16:faBusinessCase>1</v16:faBusinessCase>
        <v16:lineState>1</v16:lineState>
        <v16:address>
          <v16:street>Street</v16:street>
          <v16:houseNr>12</v16:houseNr>
        </v16:address>
      </v16:request>
    </v16:qualifyByAddress>
  </soapenv:Body>
</soapenv:Envelope>

```

```

        <v16:building>Building</v16:building>
        <v16:zip>4004</v16:zip>
        <v16:city>City</v16:city>
        <v16:firstName>First Name</v16:firstName>
        <v16:lastName>Last Name</v16:lastName>
      </v16:address>
    </v16:request>
  </v16:qualifyByAddress>
</soapenv:Body>
</soapenv:Envelope>

```

4.1.2 Response

```

<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:qualifyByAddressResponse xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
      <v16:response correlationId="--- WS faQualifyByAddress">
        <v16:success>true</v16:success>
        <v16:operationLogId>432733063</v16:operationLogId>
        <v16:qualifResult>
          <v16:qualifNr>147118110</v16:qualifNr>
          <v16:contrEleId>19</v16:contrEleId>
          <v16:qualifAnswer>
            <v16:qualiResultState>ok</v16:qualiResultState>
            <v16:qualiResultDetail>
              <v16:resultCode>Q00</v16:resultCode>
              <v16:resultComment>This line is suitable for Full Access</v16:resultComment>
            </v16:qualiResultDetail>
            <v16:qualifIndex>1</v16:qualifIndex>
            <v16:faTechnology>1</v16:faTechnology>
            <v16:address>
              <v16:street>Street</v16:street>
              <v16:houseNr>12</v16:houseNr>
              <v16:building>Building</v16:building>
              <v16:zip>307400</v16:zip>
              <v16:city>Basel</v16:city>
              <v16:firstName>Hans</v16:firstName>
              <v16:lastName>Müller</v16:lastName>
            </v16:address>
            <v16:startPoint>
              <v16:taxRegion>64</v16:taxRegion>
              <v16:accessNet>BOL</v16:accessNet>
              <v16:unitType>3</v16:unitType>
              <v16:unitNumber>10000</v16:unitNumber>
              <v16:sse>1</v16:sse>
              <v16:contactType>1</v16:contactType>
              <v16:contactNr>62</v16:contactNr>
              <v16:upPreparation>1</v16:upPreparation>
            </v16:startPoint>
            <v16:endPoint>
              <v16:taxRegion>64</v16:taxRegion>
              <v16:accessNet>BOL</v16:accessNet>
              <v16:site>BOLP</v16:site>
              <v16:siteCategory>6</v16:siteCategory>
              <v16:bbDeviceLocation>DEVLO</v16:bbDeviceLocation>
            </v16:endPoint>
            <v16:plannedEndPoint>
              <v16:taxRegion>64</v16:taxRegion>
              <v16:accessNet>BOL</v16:accessNet>
              <v16:site>BOLP</v16:site>
              <v16:siteCategory>8</v16:siteCategory>
              <v16:bbDeviceLocation>BOLD</v16:bbDeviceLocation>
              <v16:equippedDate>2018-10</v16:equippedDate>
            </v16:plannedEndPoint>
          </v16:qualifResult>
        </v16:response>
      </v16:qualifyByAddressResponse>
    </soapenv:Body>
  </soapenv:Envelope>

```

```

        <v16:equippedDateQuality>1</v16:equippedDateQuality>
        <v16:equippedDateComment>The new endpoint (is in review phase and) will be
available on 05.01.2015 (LQS Sim)</v16:equippedDateComment>
        <v16:equippedDateHistory>
        <v16:sortNr>3</v16:sortNr>
        <v16:changeDate>2015-09-24</v16:changeDate>
        <v16:eventType>1</v16:eventType>
        <v16:from>2015-03-21</v16:from>
        <v16:to>2015-11-21</v16:to>
        <v16:changeReasonId>3</v16:changeReasonId>
        <v16:changeReasonDescription>Missing
material</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:equippedDateHistory>
        <v16:sortNr>1</v16:sortNr>
        <v16:changeDate>2015-05-12</v16:changeDate>
        <v16:eventType>2</v16:eventType>
        <v16:from>98</v16:from>
        <v16:to>3</v16:to>
        <v16:changeReasonId>6</v16:changeReasonId>
        <v16:changeReasonDescription>Management re-
priorisation</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:equippedDateHistory>
        <v16:sortNr>2</v16:sortNr>
        <v16:changeDate>2015-01-31</v16:changeDate>
        <v16:eventType>2</v16:eventType>
        <v16:from>3</v16:from>
        <v16:to>98</v16:to>
        <v16:changeReasonId>6</v16:changeReasonId>
        <v16:changeReasonDescription>Management re-
priorisation</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:extensionCategory>3</v16:extensionCategory>
    </v16:plannedEndPoint>
    <v16:lineLength>
        <v16:correction>4</v16:correction>
        <v16:segment04>493</v16:segment04>
        <v16:segment05>0</v16:segment05>
        <v16:segment06>368</v16:segment06>
        <v16:segment08>0</v16:segment08>
        <v16:segment10>0</v16:segment10>
    </v16:lineLength>
    <v16:cableSize>400</v16:cableSize>
    <v16:lineState>1</v16:lineState>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>1</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-09-
30T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-09-
30T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>2</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
01T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-10-
01T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>3</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
02T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-10-
02T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>

```

```

</v16:fulfillmentTimeSlot>
<v16:fulfillmentTimeSlot>
  <v16:fulfillmentTimeSlotQualifIndex>4</v16:fulfillmentTimeSlotQualifIndex>
  <v16:fulfillmentTimeSlotStart>2018-10-
03T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
  <v16:fulfillmentTimeSlotEnd>2018-10-
03T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
</v16:fulfillmentTimeSlot>
<v16:fulfillmentTimeSlot>
  <v16:fulfillmentTimeSlotQualifIndex>5</v16:fulfillmentTimeSlotQualifIndex>
  <v16:fulfillmentTimeSlotStart>2018-10-
04T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
  <v16:fulfillmentTimeSlotEnd>2018-10-
04T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
</v16:fulfillmentTimeSlot>
<v16:currentDnType>1</v16:currentDnType>
<v16:siteDevelopment>
  <v16:nrOfLinesTotal>32</v16:nrOfLinesTotal>
  <v16:nrOfLinesUsable>24</v16:nrOfLinesUsable>
</v16:siteDevelopment>
</v16:qualifAnswer>
</v16:qualifResult>
<v16:qualifResult>
  <v16:qualifNr>147118110</v16:qualifNr>
  <v16:contrEleId>19</v16:contrEleId>
  <v16:qualifAnswer>
    <v16:qualiResultState>ok</v16:qualiResultState>
    <v16:qualiResultDetail>
      <v16:resultCode>Q00</v16:resultCode>
      <v16:resultComment>This line is suitable for Full Access</v16:resultComment>
    </v16:qualiResultDetail>
    <v16:qualifIndex>2</v16:qualifIndex>
    <v16:faTechnology>2</v16:faTechnology>
    <v16:address>
      <v16:street>Street</v16:street>
      <v16:houseNr>12</v16:houseNr>
      <v16:building>Building</v16:building>
      <v16:zip>307400</v16:zip>
      <v16:city>Basel</v16:city>
      <v16:firstName>Hans</v16:firstName>
      <v16:lastName>Müller</v16:lastName>
    </v16:address>
    <v16:startPoint>
      <v16:taxRegion>64</v16:taxRegion>
      <v16:accessNet>BOL</v16:accessNet>
      <v16:unitType>3</v16:unitType>
      <v16:unitNumber>10000</v16:unitNumber>
      <v16:sse>1</v16:sse>
      <v16:contactType>1</v16:contactType>
      <v16:contactNr>62</v16:contactNr>
      <v16:upPreparation>1</v16:upPreparation>
    </v16:startPoint>
    <v16:endPoint>
      <v16:taxRegion>64</v16:taxRegion>
      <v16:accessNet>BOL</v16:accessNet>
      <v16:site>BOLP</v16:site>
      <v16:siteCategory>6</v16:siteCategory>
      <v16:bbDeviceLocation>DEVLO</v16:bbDeviceLocation>
    </v16:endPoint>
    <v16:plannedEndPoint>
      <v16:taxRegion>64</v16:taxRegion>
      <v16:accessNet>BOL</v16:accessNet>
      <v16:site>BOLP</v16:site>
      <v16:siteCategory>8</v16:siteCategory>
      <v16:bbDeviceLocation>BOLD</v16:bbDeviceLocation>

```

```

        <v16:equippedDate>2018-10</v16:equippedDate>
        <v16:equippedDateQuality>1</v16:equippedDateQuality>
        <v16:equippedDateComment>The new endpoint (is in review phase and) will be
available on 05.01.2015 (LQS Sim)</v16:equippedDateComment>
        <v16:equippedDateHistory>
            <v16:sortNr>3</v16:sortNr>
            <v16:changeDate>2015-09-24</v16:changeDate>
            <v16:eventType>1</v16:eventType>
            <v16:from>2015-03-21</v16:from>
            <v16:to>2015-11-21</v16:to>
            <v16:changeReasonId>3</v16:changeReasonId>
            <v16:changeReasonDescription>Missing
material</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:equippedDateHistory>
            <v16:sortNr>1</v16:sortNr>
            <v16:changeDate>2015-05-12</v16:changeDate>
            <v16:eventType>2</v16:eventType>
            <v16:from>98</v16:from>
            <v16:to>3</v16:to>
            <v16:changeReasonId>6</v16:changeReasonId>
            <v16:changeReasonDescription>Management re-
priorisation</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:equippedDateHistory>
            <v16:sortNr>2</v16:sortNr>
            <v16:changeDate>2015-01-31</v16:changeDate>
            <v16:eventType>2</v16:eventType>
            <v16:from>3</v16:from>
            <v16:to>98</v16:to>
            <v16:changeReasonId>6</v16:changeReasonId>
            <v16:changeReasonDescription>Management re-
priorisation</v16:changeReasonDescription>
        </v16:equippedDateHistory>
        <v16:extensionCategory>3</v16:extensionCategory>
    </v16:plannedEndPoint>
    <v16:lineLength>
        <v16:correction>4</v16:correction>
        <v16:segment04>493</v16:segment04>
        <v16:segment05>0</v16:segment05>
        <v16:segment06>368</v16:segment06>
        <v16:segment08>0</v16:segment08>
        <v16:segment10>0</v16:segment10>
    </v16:lineLength>
    <v16:cableSize>400</v16:cableSize>
    <v16:lineState>1</v16:lineState>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>6</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-09-
30T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-09-
30T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>7</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
01T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-10-
01T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>8</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
02T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>

```

```

        <v16:fulfillmentTimeSlotEnd>2018-10-
02T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>9</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
03T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-10-
03T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:fulfillmentTimeSlot>
        <v16:fulfillmentTimeSlotQualifIndex>10</v16:fulfillmentTimeSlotQualifIndex>
        <v16:fulfillmentTimeSlotStart>2018-10-
04T08:01:00.000+02:00</v16:fulfillmentTimeSlotStart>
        <v16:fulfillmentTimeSlotEnd>2018-10-
04T12:01:00.000+02:00</v16:fulfillmentTimeSlotEnd>
    </v16:fulfillmentTimeSlot>
    <v16:currentDnType>1</v16:currentDnType>
    <v16:siteDevelopment>
        <v16:nrOfLinesTotal>32</v16:nrOfLinesTotal>
        <v16:nrOfLinesUsable>24</v16:nrOfLinesUsable>
    </v16:siteDevelopment>
    </v16:qualifAnswer>
</v16:qualifResult>
</v16:response>
</v16:qualifyByAddressResponse>
</soapenv:Body>
</soapenv:Envelope>

```

4.2 Creating a Full Access subscription

After the successful qualification, the order for the desired BBCS subscription can be sent to WSG. The following example shows an order for a Full Access. Note the reference to the qualification result of the previous interaction with WSG. (Chapter 4.1)

4.2.1 Request

```

<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v16:create>
      <v16:request correlationId="--- WS faCreate">
        <v16:ptsId>777710</v16:ptsId>
        <v16:qualifNr>147118070</v16:qualifNr>
        <v16:qualifIndex>1</v16:qualifIndex>
        <v16:customerWishDateTime>2018-09-25T00:00:00.000+01:00</v16:customerWishDateTime>
        <v16:contactName>SOAP UI</v16:contactName>
        <v16:contactPhoneNr>0793143367</v16:contactPhoneNr>
        <v16:faPortNr>1</v16:faPortNr>
        <v16:fulfillmentTimeSlotQualifIndex>1</v16:fulfillmentTimeSlotQualifIndex>
      </v16:request>
    </v16:create>
  </soapenv:Body>
</soapenv:Envelope>

```

```
</soapenv:Body>  
</soapenv:Envelope>
```

4.2.2 Response

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:createResponse xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
      <v16:response correlationId="--- WS faCreate">
        <v16:success>true</v16:success>
        <v16:operationLogId>432733047</v16:operationLogId>
        <v16:orderNr>77771020180925000001000000</v16:orderNr>
      </v16:response>
    </v16:createResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

4.2.3 GUI

The order is visible in the WSG Full Access GUI:

Order Nr	Order Type	Order State	DN / VN / NSN	POA FA Id	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Timestamp	Contract Element	FA Technology	FA Device Location	DN Office	Region	External Reference
Detail 77771020130715000094000000	ACCESS_CREATE	PROCESSING	0108555261	?	15/07/2013	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	Full Access (TAL)	classical ADSL	MOR	62MOR	Central	

The following Screenshots show the Service Status of the subscriber after the order is completed:

Detail Order

Main
Detail

PTS	777710 Testaccount Peter Rosenberger	Internal Reference	ISP-driven ORDER
Order Nr	77771020130715000094000000	External Reference	-
DN / VN / NSN (Requested)	0108555261	DN (STNR) / VN / NSN	0108555261
STNR DDI	-	DN Type	-
Qualification Nr	86666423	Qualification Index	1
Order Type	ACCESS_CREATE	POA FA Id	?
Order State	PROCESSING	Response	-
DN Office	62MOR	FA Device Location	MOR
Contract Element	Full Access (TAL)	FA Technology	classical ADSL
Customer Wish Date	15/07/2013 00:00	Estimated Due Date/Time Start	29/07/2013 12:12
Last modified	15/07/2013 13:29:20.837 Pol	Termination Date	-
Comment	-	FA Port Nr (requested)	1
Contact Person Name	SOAP UI	Contact Person Phone	0793143367

History

User name	Order State	DN (STNR) / VN / NSN	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Date/Time	FA Technology	Comment	Response
Pol	PROCESSING	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	classical ADSL		
Batch	CHECKED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.135	classical ADSL		
Batch	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:20.790	classical ADSL		
HP Tester	ENTERED		15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:12.332	classical ADSL		

Detail Order

Main	Detail
Address / Starting Point Region Central Billing Zone - Street, Nr, Building Schönstrasse, 1a, Chalet ZIP, City 307400, Gümliigen Starting Point 62;MOR;3;10000;0 Contact Type 1 Contact Number 62 Number of Wires 2 wires	Cable Box UP Board Nr - UP Switching Place Nr - UP Type of Contact - UP Contact Nr - UP Coordinate X - UP Coordinate Y -
Qualification Request First Name First Name Last Name Last Name Building Building Street Street House Nr 12 ZIP 4004 City City	Further Details SG-MM - CPE Owner - Delivery Notification - BB Access - BB Port 1 Effective Speed - Calculated max. Bitrate - Measured max. Bitrate -

History

User name	Order State	DN (STNR) / VN / NSN	Customer Wish Date	Estimated Due Date/Time Start	Estimated Due Date/Time End	Transaction Date/Time	FA Technology	Comment	Response
Pol	PROCESSING	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.837	classical ADSL		
Batch	CHECKED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:29:20.135	classical ADSL		
Batch	ENTERED	0108555261	15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:20.790	classical ADSL		
HP Tester	ENTERED		15/07/2013 00:00	29/07/2013 12:12	29/07/2013 16:00	15/07/2013 13:28:12.332	classical ADSL		

4.3 Modification of a Full Access description

Existing subscriptions can be modified to satisfy the new needs of a customer. In this Example the technology is changed from classical ADSL to VDSL

4.3.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:modifyPending>
      <v16:request correlationId="Regr Test faModifyPending">
        <v16:ptsId>777710</v16:ptsId>
        <v16:orderNr>77771020180925000001000000</v16:orderNr>
        <v16:qualifIndex>1</v16:qualifIndex>
        <v16:comment>WS faModifyPend Date,Qualif and Contact</v16:comment>
        <v16:qualifNr>147118070</v16:qualifNr>
        <v16:customerWishDateTime>2018-09-25T00:00:00.000+01:00</v16:customerWishDateTime>
        <v16:extRef>WS faModifyPend</v16:extRef>
        <v16:contactName>modifPend Contact</v16:contactName>
        <v16:contactPhoneNr>0584443593</v16:contactPhoneNr>
      </v16:request>
    </v16:modifyPending>
  </soapenv:Body>
</soapenv:Envelope>
```

4.3.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:modifyPendingResponse xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
      <v16:response correlationId="Regr Test faModifyPending">
        <v16:success>true</v16:success>
        <v16:operationLogId>432733048</v16:operationLogId>
        <v16:orderNr>77771020180925000001000000</v16:orderNr>
      </v16:response>
    </v16:modifyPendingResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

shows all notifications produced during the processing of the orders above.

4.4 Disconnection of a Full Access subscription

If the BBCS subscription is no longer needed it can be deprovisioned as shown in the following example

4.4.1 Request

```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:disconnect>
      <v16:request correlationId="Regr Test Disconnect">
        <v16:ptsId>777710</v16:ptsId>
        <v16:qualifNr>147118110</v16:qualifNr>
        <v16:dnVnNsn>0182010300</v16:dnVnNsn>
        <v16:qualifIndex>1</v16:qualifIndex>
        <v16:customerWishDateTime>2018-12-06T05:00:00.000Z</v16:customerWishDateTime>
        <v16:comment>Disconnect ohne Qualif. by WS</v16:comment>
        <v16:extRef>Regr Test extRef</v16:extRef>
        <v16:fulfillmentTimeSlotQualifIndex>1</v16:fulfillmentTimeSlotQualifIndex>
      </v16:request>
    </v16:disconnect>
  </soapenv:Body>
</soapenv:Envelope>
```

4.4.2 Response


```
<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
  <soapenv:Header/>
  <soapenv:Body>
    <v16:disconnectResponse xmlns:v16="http://www.swisscom.com/wsg/fa/v16">
      <v16:response correlationId="Regr Test Disconnect">
        <v16:success>true</v16:success>
        <v16:operationLogId>432733073</v16:operationLogId>
        <v16:orderNr>77771020180925000002000000</v16:orderNr>
      </v16:response>
    </v16:disconnectResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

5 Assurance (BBCS Trouble Ticket)

For a detailed interface definition see[4].

5.1 Process Overview

The following picture shows the interactions between the ISP's assurance system and WSG:

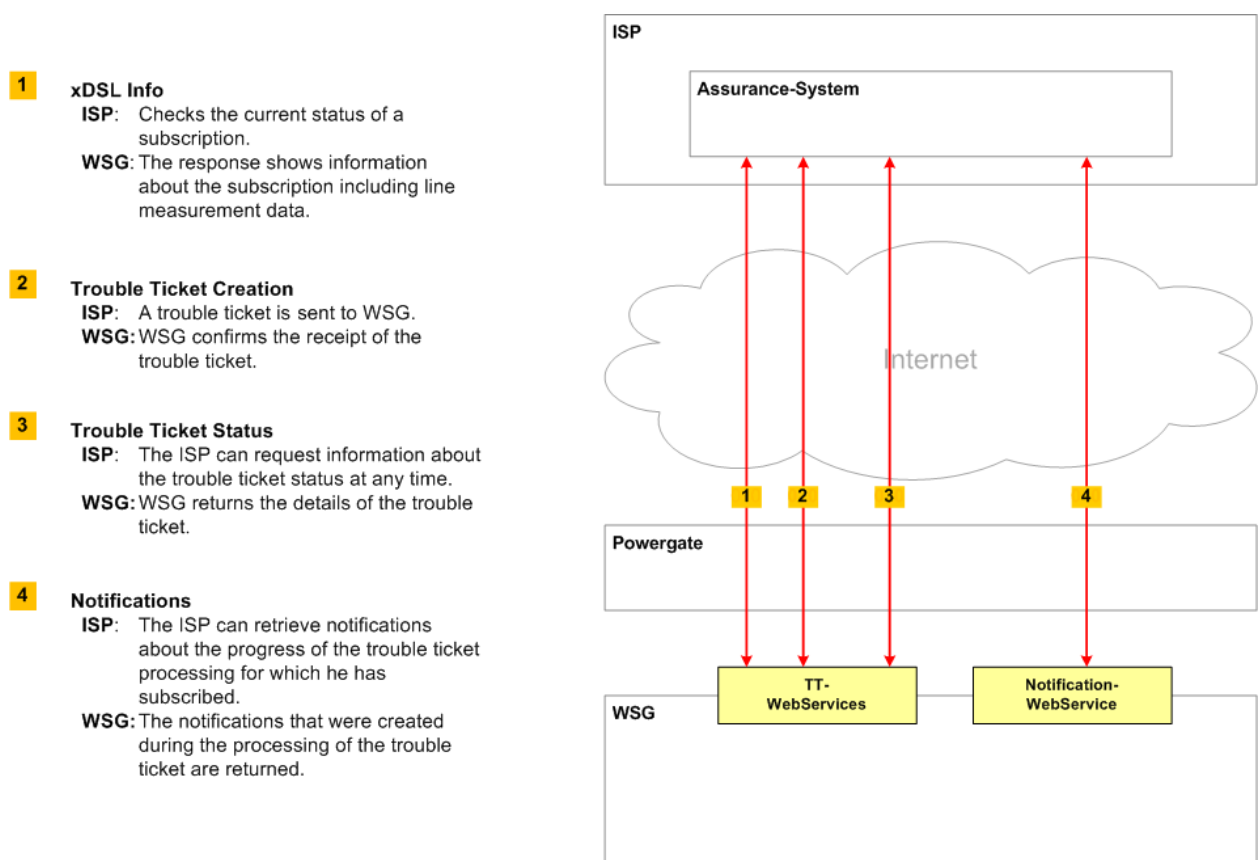

5.2 Get xDSL Info

If an existing BBCS subscription does not work (any more) a get xDSL Info request show available services, network and equipment information, state, stability, measurements and charts (Traffic Light, repair action, ICA Result, ICA Problems, DSLAM alarms, NA measurements, MELT data) For details see B2B XDSL Info Function and Assurance User Manual too.

5.2.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>${Header.Username}</wsse:Username>
        <wsse:Password>${Header.Password}</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v40:getXdslInfo>
      <v40:request correlationId="getXdslinfo WS Tutorial">
        <v40:dnVnNsn>0108284947</v40:dnVnNsn>
        <v40:fetchRealTimeData>true</v40:fetchRealTimeData>
        <v40:fetchMeasurementHistoryData>true</v40:fetchMeasurementHistoryData>
        <v40:fetchAlarmData>true</v40:fetchAlarmData>
        <v40:fetchMeltData>true</v40:fetchMeltData>
      </v40:request>
    </v40:getXdslInfo>
  </soapenv:Body>
</soapenv:Envelope>
```

5.2.2 Response

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  <soapenv:Header/>
  <soapenv:Body>
    <v40:getXdslInfoResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
      <v40:response correlationId="getXdslinfo WS Tutorial">
        <v40:success>true</v40:success>
        <v40:operationLogId>432693483</v40:operationLogId>
        <v40:xdslInfo>
          <v40:actualBitrateUp>16504</v40:actualBitrateUp>
          <v40:actualBitrateDown>55040</v40:actualBitrateDown>
          <v40:actualBitrateUnit>kb/s</v40:actualBitrateUnit>
          <v40:attainableBitrateUp>23728</v40:attainableBitrateUp>
          <v40:attainableBitrateDown>83904</v40:attainableBitrateDown>
          <v40:attainableBitrateUnit>kb/s</v40:attainableBitrateUnit>
          <v40:attenuationUp>16.8</v40:attenuationUp>
          <v40:attenuationDown>14.8</v40:attenuationDown>
          <v40:attenuationUnit>db</v40:attenuationUnit>
          <v40:capacityOccupationUp>64</v40:capacityOccupationUp>
          <v40:capacityOccupationDown>81</v40:capacityOccupationDown>
          <v40:capacityOccupationUnit>%</v40:capacityOccupationUnit>
          <v40:bbType>2</v40:bbType>
          <v40:contrEleId>120</v40:contrEleId>
          <v40:calculatedLineLength>862</v40:calculatedLineLength>
          <v40:correctionDbLineLength>872</v40:correctionDbLineLength>
          <v40:dnType>13</v40:dnType>
          <v40:dnVnNsn>0108284947</v40:dnVnNsn>
```

```

<v40:interleaveMode>2</v40:interleaveMode>
<v40:ispId>100008</v40:ispId>
<v40:ispIdProvider>100068</v40:ispIdProvider>
<v40:lastStatusChange>1970-01-01T01:00:00.000+01:00</v40:lastStatusChange>
<v40:lineStateId>23684278</v40:lineStateId>
<v40:noiseMarginUp>11.1</v40:noiseMarginUp>
<v40:noiseMarginDown>14</v40:noiseMarginDown>
<v40:noiseMarginUnit>db</v40:noiseMarginUnit>
<v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
<v40:requestDate>2020-04-09T15:20:24.000+02:00</v40:requestDate>
<v40:responseDate>2020-04-09T15:21:18.000+02:00</v40:responseDate>
<v40:responseMessage>TIBCO/NC-CIA: 000: OK: NA: 000: OK</v40:responseMessage>
<v40:sessionType>1</v40:sessionType>
<v40:accessProfile>
  <v40:speedProfileDescription>50000 down / 10000 up</v40:speedProfileDescription>
  <v40:speedProfileName>50000 down / 10000 up</v40:speedProfileName>
  <v40:accessSpeedProfileNr>59</v40:accessSpeedProfileNr>
  <v40:technologyType>2</v40:technologyType>
  <v40:accessProfileType>3</v40:accessProfileType>
</v40:accessProfile>
<v40:xdslInfoLight>green</v40:xdslInfoLight>
<v40:xdslLineState>up</v40:xdslLineState>
<v40:opStatus>4</v40:opStatus>
<v40:cpeInfo>
  <v40:cpeName>ADB V226N1 Centro Grande</v40:cpeName>
  <v40:dslamTypeAllowed>
    <v40:technology>2</v40:technology>
    <v40:dslamType>2</v40:dslamType>
    <v40:dslamType>3</v40:dslamType>
  </v40:dslamTypeAllowed>
  <v40:capability>
    <v40:technologyType>1</v40:technologyType>
    <v40:capabilityOverall>7</v40:capabilityOverall>
    <v40:capabilityHardware>1</v40:capabilityHardware>
    <v40:capabilityFirmware>2</v40:capabilityFirmware>
  </v40:capability>
  <v40:capability>
    <v40:technologyType>2</v40:technologyType>
    <v40:capabilityOverall>1</v40:capabilityOverall>
    <v40:capabilityHardware>2</v40:capabilityHardware>
    <v40:capabilityFirmware>0</v40:capabilityFirmware>
  </v40:capability>
  <v40:capability>
    <v40:technologyType>3</v40:technologyType>
    <v40:capabilityOverall>2</v40:capabilityOverall>
    <v40:capabilityHardware>0</v40:capabilityHardware>
    <v40:capabilityFirmware>1</v40:capabilityFirmware>
  </v40:capability>
  <v40:comment>CPE Info Comment</v40:comment>
  <v40:cpeVendorSerialNumber>7C26649B6B20 F5360
SG4D10001362</v40:cpeVendorSerialNumber>
  <v40:cpeVendorId>B5004244434D206A</v40:cpeVendorId>
  <v40:cpeSystemVendorId>3D005341474D0000</v40:cpeSystemVendorId>
  <v40:cpeVersionNumber>AvfH43j2.26u 13</v40:cpeVersionNumber>
</v40:cpeInfo>
<v40:stabilityInfo>
  <v40:overallStability>3</v40:overallStability>
  <v40:codingViolationDownstreamStability>3</v40:codingViolationDownstreamStability>
  <v40:codingViolationUpstreamStability>3</v40:codingViolationUpstreamStability>

<v40:severelyErrorSecondsDownstreamStability>3</v40:severelyErrorSecondsDownstreamStability>

<v40:severelyErrorSecondsUpstreamStability>3</v40:severelyErrorSecondsUpstreamStability>
  <v40:spontaneousResyncsStability>1</v40:spontaneousResyncsStability>
  <v40:attainableActualBitrateRatio>2</v40:attainableActualBitrateRatio>

```

```

</v40:stabilityInfo>
<v40:icaResult>
  <v40:analysisDate>2016-03-15T14:46:15.000+01:00</v40:analysisDate>
  <v40:analysisDate24h>2016-03-10T14:46:15.000+01:00</v40:analysisDate24h>
  <v40:analysisState>6</v40:analysisState>
  <v40:analysisType>1</v40:analysisType>
  <v40:problemDetected>0</v40:problemDetected>
  <v40:potentialAttainBitrateDown>-1</v40:potentialAttainBitrateDown>
  <v40:potentialAttainBitrateUp>-1</v40:potentialAttainBitrateUp>
  <v40:potentialAccessProfileNr>0</v40:potentialAccessProfileNr>
  <v40:accessSpeedGainDown>-1</v40:accessSpeedGainDown>
  <v40:accessSpeedGainUp>-1</v40:accessSpeedGainUp>
  <v40:accessProblemType>0</v40:accessProblemType>
  <v40:bbrSocketInstalled>>false</v40:bbrSocketInstalled>
  <v40:bbrSocketInstallationDate>1970-01-
01T02:00:00.000+01:00</v40:bbrSocketInstallationDate>
  <v40:icaProblems>
    <v40:description>2</v40:description>
    <v40:descriptionText>Degraded Contact</v40:descriptionText>
    <v40:confidence>91</v40:confidence>
    <v40:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v40:impact>
    <v40:impactAttainBitrateDown>0</v40:impactAttainBitrateDown>
    <v40:impactAttainBitrateUp>0</v40:impactAttainBitrateUp>
  </v40:icaProblems>
  <v40:icaProblems>
    <v40:description>1</v40:description>
    <v40:descriptionText>BridgeTap</v40:descriptionText>
    <v40:confidence>90</v40:confidence>
    <v40:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v40:impact>
    <v40:impactAttainBitrateDown>0</v40:impactAttainBitrateDown>
    <v40:impactAttainBitrateUp>0</v40:impactAttainBitrateUp>
  </v40:icaProblems>
</v40:icaResult>
<v40:endPoint>
  <v40:dnOffice>64BOL</v40:dnOffice>
  <v40:site>BOL</v40:site>
  <v40:bbDeviceLocation>DELOC</v40:bbDeviceLocation>
  <v40:siteCategory>28</v40:siteCategory>
  <v40:availableTechnologyTypes>
    <v40:technologyType>1</v40:technologyType>
    <v40:technologyType>2</v40:technologyType>
  </v40:availableTechnologyTypes>
</v40:endPoint>
<v40:problemDescription>Degraded Contact</v40:problemDescription>
<v40:proposedRepairAction>If the stability and performance is ok, then do nothing.
Else check and correct the inhouse cabling (install broad band ready).</v40:proposedRepairAction>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startTime>2020-04-02T14:10:59.000+02:00</v40:startTime>
  <v40:endDateTime>2020-04-04T14:10:59.000+02:00</v40:endDateTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startTime>2020-04-06T14:10:59.000+02:00</v40:startTime>
  <v40:endDateTime>2020-04-08T14:10:59.000+02:00</v40:endDateTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startTime>2020-04-09T14:10:59.000+02:00</v40:startTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>

```

```

<v40:measurementHistoryItem>
  <v40:date>2020-04-08T12:00:00.000+02:00</v40:date>
  <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
  <v40:codingViolationsUp>3</v40:codingViolationsUp>
  <v40:codingViolationsDown>27</v40:codingViolationsDown>
  <v40:noiseMarginUp>16</v40:noiseMarginUp>
  <v40:noiseMarginDown>9</v40:noiseMarginDown>
  <v40:noiseMarginUnit>dB</v40:noiseMarginUnit>
  <v40:actualBitrateUp>16512</v40:actualBitrateUp>
  <v40:actualBitrateDown>88064</v40:actualBitrateDown>
  <v40:actualBitrateUnit>kb/s</v40:actualBitrateUnit>
  <v40:attainableBitrateUp>32428</v40:attainableBitrateUp>
  <v40:attainableBitrateDown>300010</v40:attainableBitrateDown>
  <v40:attainableBitrateUnit>kb/s</v40:attainableBitrateUnit>
  <v40:attenuationUp>6</v40:attenuationUp>
  <v40:attenuationDown>6</v40:attenuationDown>
  <v40:attenuationUnit>dB</v40:attenuationUnit>
  <v40:dslamName>ipc-bol640-s-vd-01</v40:dslamName>
  <v40:bbLogPortNr>1/2/3/4</v40:bbLogPortNr>
  <v40:measuredTime>86400</v40:measuredTime>
  <v40:serialNumber>7C26649B6B20 F5360 SG4D10001362</v40:serialNumber>
  <v40:severelyErrorSecDown>5</v40:severelyErrorSecDown>
  <v40:severelyErrorSecUp>0</v40:severelyErrorSecUp>

<v40:codingViolationsDown15Minutes>31;15;77;21;84;89;43;21;36;28;33;29;17;0;5;7;3;21;8;25;33;87;42;9
2;23;69;65;59;21;27;28;6;6;5;22;29;54;17;53;70;46;56;92;94;25;75;23;5;24;4;5;4;17;22;31;8;77;75;21;5
;84;43;72;4;42;35;21;12;0;6;2;39;58;12;28;42;0;14;21;24;6;44;51;20;23;6;2;2;6;37;41;46;63;61;33;29</
v40:codingViolationsDown15Minutes>

<v40:codingViolationsUp15Minutes>0;3;32;11;55;68;38;20;40;35;47;49;36;0;52;36;4;8;0;6;14;48;28;71;20
;67;71;74;30;46;61;19;59;28;28;11;0;4;22;38;30;43;80;92;27;93;33;9;51;14;46;23;21;8;0;2;31;41;14;4;7
3;42;79;6;60;60;45;38;8;29;3;15;0;2;11;23;0;11;19;24;6;55;72;34;50;20;23;14;7;14;0;11;25;33;22;22</v
40:codingViolationsUp15Minutes>

<v40:severelyErrorSecDown15Minutes>51;43;8;2;23;23;4;2;10;8;7;26;73;47;72;30;20;36;13;58;41;37;34;26
;8;1;2;18;41;1;38;23;43;35;35;13;85;75;1;45;10;12;5;0;7;24;6;33;39;75;2;32;58;85;17;66;29;16;18;5;10
;1;3;12;42;16;40;53;77;79;62;34;84;53;18;56;2;14;12;2;7;23;5;21;63;51;21;23;59;76;47;68;68;16;16;23<
/v40:severelyErrorSecDown15Minutes>

<v40:severelyErrorSecUp15Minutes>51;48;10;3;40;52;16;46;36;8;2;1;20;20;41;20;16;32;13;65;52;54;61;61
;28;24;9;18;12;0;10;10;24;24;28;12;85;85;1;66;17;27;18;7;25;24;1;1;11;33;1;22;46;75;17;74;36;23;31;1
1;37;20;12;12;12;0;11;23;44;54;49;30;84;60;23;83;4;33;43;45;24;23;1;1;17;22;12;16;47;67;47;77;86;23;
28;53</v40:severelyErrorSecUp15Minutes>
  <v40:accessSpeedProfileNr>190</v40:accessSpeedProfileNr>
  <v40:interleaveMode>2</v40:interleaveMode>
  <v40:psdClass>20</v40:psdClass>
</v40:measurementHistoryItem>
<v40:measurementHistoryItem>
  <v40:date>2020-04-07T12:00:00.000+02:00</v40:date>
  <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
  <v40:codingViolationsUp>4</v40:codingViolationsUp>
  <v40:codingViolationsDown>28</v40:codingViolationsDown>
  <v40:noiseMarginUp>17</v40:noiseMarginUp>
  <v40:noiseMarginDown>10</v40:noiseMarginDown>
  <v40:noiseMarginUnit>dB</v40:noiseMarginUnit>
  <v40:actualBitrateUp>16512</v40:actualBitrateUp>
  <v40:actualBitrateDown>88064</v40:actualBitrateDown>
  <v40:actualBitrateUnit>kb/s</v40:actualBitrateUnit>
  <v40:attainableBitrateUp>32438</v40:attainableBitrateUp>
  <v40:attainableBitrateDown>300011</v40:attainableBitrateDown>
  <v40:attainableBitrateUnit>kb/s</v40:attainableBitrateUnit>
  <v40:attenuationUp>7</v40:attenuationUp>
  <v40:attenuationDown>7</v40:attenuationDown>
  <v40:attenuationUnit>dB</v40:attenuationUnit>
  <v40:dslamName>ipc-bol640-s-vd-01</v40:dslamName>

```

```

<v40:bbLogPortNr>1/2/3/4</v40:bbLogPortNr>
<v40:measuredTime>86401</v40:measuredTime>
<v40:serialNumber>7C26649B6B20 F5360 SG4D10001362</v40:serialNumber>
<v40:severelyErrorSecDown>6</v40:severelyErrorSecDown>
<v40:severelyErrorSecUp>1</v40:severelyErrorSecUp>

<v40:codingViolationsDown15Minutes>40;9;66;1;2;7;55;81;29;46;37;16;8;2;9;27;39;37;16;37;7;52;28;88;4
1;9;43;22;26;15;8;3;5;17;34;38;40;56;69;61;9;8;84;33;28;25;17;18;20;0;13;2;23;53;20;19;47;6;89;37;57
;59;2;52;52;32;3;0;7;16;43;9;62;66;27;4;93;60;38;22;25;43;40;23;6;2;0;1;4;35;36;72;61;68;10;93</v40:
codingViolationsDown15Minutes>

<v40:codingViolationsUp15Minutes>11;4;38;1;2;7;55;91;36;67;64;36;31;38;31;27;11;2;4;16;4;36;22;78;41
;10;54;33;46;35;29;53;16;17;10;2;11;25;39;42;7;7;84;37;35;37;30;41;73;2;45;2;6;3;5;8;27;4;70;33;57;6
6;2;76;91;73;14;5;25;16;12;0;17;29;15;3;74;53;38;24;31;63;70;52;23;46;1;1;1;2;10;32;34;46;8;82</v40:
codingViolationsUp15Minutes>

<v40:severelyErrorSecDown15Minutes>46;34;36;0;30;12;0;10;7;17;3;71;27;33;44;75;18;4;17;0;44;27;12;14
;0;7;32;32;21;5;37;91;13;52;38;0;33;55;36;6;21;15;0;1;22;36;17;57;54;46;47;39;25;58;43;27;46;5;17;14
;0;1;11;21;30;74;24;67;10;61;58;43;30;0;50;0;7;13;0;10;21;33;38;42;60;45;33;85;96;12;42;45;13;29;31;
10</v40:severelyErrorSecDown15Minutes>

<v40:severelyErrorSecUp15Minutes>53;44;55;1;72;51;28;27;6;3;0;22;13;20;31;60;17;4;19;0;66;49;31;61;1
0;18;26;6;2;1;17;54;9;42;35;0;38;71;55;12;52;64;28;2;18;7;1;18;25;27;33;31;23;59;49;35;70;10;42;58;4
8;3;9;4;3;23;11;40;7;49;53;44;34;0;76;0;18;57;12;27;17;7;4;13;28;26;23;68;88;12;48;58;20;53;75;43</v
40:severelyErrorSecUp15Minutes>
<v40:accessSpeedProfileNr>190</v40:accessSpeedProfileNr>
<v40:interleaveMode>2</v40:interleaveMode>
<v40:psdClass>20</v40:psdClass>
</v40:measurementHistoryItem>
<v40:bbAdslEmulated>1</v40:bbAdslEmulated>
<v40:dslamName>IPC-SUR710-S-DM-04</v40:dslamName>
<v40:networkType>3</v40:networkType>
<v40:psdClass>20</v40:psdClass>
<v40:userName>HP Tester</v40:userName>
<v40:vectorized>true</v40:vectorized>
<v40:bbPortLineType>1</v40:bbPortLineType>
<v40:netDrivenInfo>
  <v40:reasonOfPotential>
    <v40:potential>
      <v40:potentialCode>-1000</v40:potentialCode>
      <v40:potentialDescription>stability issue - outstanding downgrooming
(ServiceImpact)</v40:potentialDescription>
    </v40:potential>
    <v40:potential>
      <v40:potentialCode>1000</v40:potentialCode>
      <v40:potentialDescription>Pending upgrooming</v40:potentialDescription>
    </v40:potential>
    <v40:potential>
      <v40:potentialCode>1001</v40:potentialCode>
      <v40:potentialDescription>old CPE Firmware</v40:potentialDescription>
    </v40:potential>
  </v40:reasonOfPotential>
  <v40:lqsMaxTechnologyType>1</v40:lqsMaxTechnologyType>
  <v40:lqsMaxAccessProfileNr>59</v40:lqsMaxAccessProfileNr>
  <v40:naFailureType>0</v40:naFailureType>
  <v40:naMaxTechnologyType>1</v40:naMaxTechnologyType>
  <v40:naMaxAccessProfileNr>62</v40:naMaxAccessProfileNr>
</v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 2</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-08T03:20:58.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 2</v40:inputReason>
  <v40:action>aAction 2</v40:action>
  <v40:initiator>aInitiator 2</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>

```

```

</v40:psdClass>4</v40:psdClass>
<v40:technologyType>1</v40:technologyType>
<v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
<v40:interleaveMode>2</v40:interleaveMode>
<v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
<v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
</v40:portConfigBeforeAction>
<v40:portConfigAfterAction>
  <v40:technology>1</v40:technology>
  <v40:psdClass>11</v40:psdClass>
  <v40:technologyType>2</v40:technologyType>
  <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
  <v40:interleaveMode>3</v40:interleaveMode>
  <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
  <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
</v40:portConfigAfterAction>
</v40:lastNetDrivenAction>
<v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 1</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-07T15:20:58.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 1</v40:inputReason>
  <v40:action>aAction 1</v40:action>
  <v40:initiator>aInitiator 1</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>
    <v40:psdClass>4</v40:psdClass>
    <v40:technologyType>1</v40:technologyType>
    <v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
  </v40:portConfigBeforeAction>
  <v40:portConfigAfterAction>
    <v40:technology>1</v40:technology>
    <v40:psdClass>11</v40:psdClass>
    <v40:technologyType>2</v40:technologyType>
    <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
    <v40:interleaveMode>3</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
  </v40:portConfigAfterAction>
</v40:lastNetDrivenAction>
<v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 0</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-07T03:20:58.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 0</v40:inputReason>
  <v40:action>aAction 0</v40:action>
  <v40:initiator>aInitiator 0</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>
    <v40:psdClass>4</v40:psdClass>
    <v40:technologyType>1</v40:technologyType>
    <v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
  </v40:portConfigBeforeAction>
  <v40:portConfigAfterAction>
    <v40:technology>1</v40:technology>
    <v40:psdClass>11</v40:psdClass>
    <v40:technologyType>2</v40:technologyType>
    <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
    <v40:interleaveMode>3</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
  </v40:portConfigAfterAction>
</v40:lastNetDrivenAction>

```

```

    </v40:portConfigAfterAction>
  </v40:lastNetDrivenAction>
  <v40:runningNetDrivenAction>
    <v40:netDrivenProcess>aNetdrivenProcess</v40:netDrivenProcess>
    <v40:startDateTime>2017-02-17T10:30:47.000+01:00</v40:startDateTime>
    <v40:inputReason>aInputReason2</v40:inputReason>
    <v40:currentStep>aCurrentStep</v40:currentStep>
    <v40:initiator>aInitiator2</v40:initiator>
  </v40:runningNetDrivenAction>
</v40:netDrivenInfo>
<v40:meltResult>
  <v40:analysisDate>2020-04-09T15:21:09.000+02:00</v40:analysisDate>
  <v40:meltState>4</v40:meltState>
  <v40:lineLengthA>58</v40:lineLengthA>
  <v40:lineLengthB>80</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.011</v40:acvab>
    <v40:acvag>0.011</v40:acvag>
    <v40:acvbg>0.011</v40:acvbg>
    <v40:dcvab>-0.028</v40:dcvab>
    <v40:dcvag>-0.216</v40:dcvag>
    <v40:dcvbg>-0.189</v40:dcvbg>
    <v40:rab>10000000</v40:rab>
    <v40:rba>10000000</v40:rba>
    <v40:rag>10000000</v40:rag>
    <v40:rbg>10000000</v40:rbg>
    <v40:cab>92.0</v40:cab>
    <v40:cag>0.0</v40:cag>
    <v40:cbg>1.0</v40:cbg>
  </v40:meltLineState>
</v40:meltHistory>
<v40:meltHistory>
  <v40:analysisDate>2020-04-02T15:21:09.000+02:00</v40:analysisDate>
  <v40:meltState>21</v40:meltState>
  <v40:lineLengthA>81</v40:lineLengthA>
  <v40:lineLengthB>17</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.01</v40:acvab>
    <v40:acvag>0.01</v40:acvag>
    <v40:acvbg>0.011</v40:acvbg>
    <v40:dcvab>0.214</v40:dcvab>
    <v40:dcvag>0.09</v40:dcvag>
    <v40:dcvbg>0.184</v40:dcvbg>
    <v40:rab>9309356</v40:rab>
    <v40:rba>9897388</v40:rba>
    <v40:rag>9110815</v40:rag>
    <v40:rbg>9917266</v40:rbg>
    <v40:cab>79.65</v40:cab>
    <v40:cag>0.248</v40:cag>
    <v40:cbg>0.088</v40:cbg>
  </v40:meltLineState>
</v40:meltHistory>
<v40:meltHistory>
  <v40:analysisDate>2020-03-26T15:21:09.000+01:00</v40:analysisDate>
  <v40:meltState>4</v40:meltState>
  <v40:lineLengthA>6</v40:lineLengthA>
  <v40:lineLengthB>25</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.011</v40:acvab>
    <v40:acvag>0.009</v40:acvag>
    <v40:acvbg>0.01</v40:acvbg>
    <v40:dcvab>0.175</v40:dcvab>
    <v40:dcvag>0.022</v40:dcvag>
    <v40:dcvbg>0.253</v40:dcvbg>
    <v40:rab>9092913</v40:rab>
    <v40:rba>9677953</v40:rba>

```

```

        <v40:rag>9261037</v40:rag>
        <v40:rbg>9826757</v40:rbg>
        <v40:cab>54.479</v40:cab>
        <v40:cag>0.035</v40:cag>
        <v40:cbg>0.126</v40:cbg>
    </v40:meltLineState>
</v40:meltHistory>
</v40:meltResult>
</v40:xdsInfo>
<v40:xdsInfo>
    <v40:bbType>2</v40:bbType>
    <v40:contrEleId>120</v40:contrEleId>
    <v40:calculatedLineLength>862</v40:calculatedLineLength>
    <v40:correctionDbLineLength>872</v40:correctionDbLineLength>
    <v40:dnType>13</v40:dnType>
    <v40:dnVnNsn>0108284947</v40:dnVnNsn>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:ispId>100008</v40:ispId>
    <v40:ispIdProvider>100068</v40:ispIdProvider>
    <v40:lineStateId>23684256</v40:lineStateId>
    <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
    <v40:requestDate>2020-04-09T14:16:23.000+02:00</v40:requestDate>
    <v40:responseDate>2020-04-09T14:18:36.000+02:00</v40:responseDate>
    <v40:responseMessage>TIBCO/NC-CIA: 000: OK: NA: 000: OK</v40:responseMessage>
    <v40:sessionType>1</v40:sessionType>
    <v40:accessProfile>
        <v40:speedProfileDescription>50000 down / 10000 up</v40:speedProfileDescription>
        <v40:speedProfileName>50000 down / 10000 up</v40:speedProfileName>
        <v40:accessSpeedProfileNr>59</v40:accessSpeedProfileNr>
        <v40:technologyType>2</v40:technologyType>
        <v40:accessProfileType>3</v40:accessProfileType>
    </v40:accessProfile>
    <v40:opStatus>4</v40:opStatus>
    <v40:cpeInfo>
        <v40:cpeName>-</v40:cpeName>
        <v40:dslamTypeAllowed>
            <v40:technology>2</v40:technology>
            <v40:dslamType>2</v40:dslamType>
            <v40:dslamType>3</v40:dslamType>
        </v40:dslamTypeAllowed>
        <v40:capability>
            <v40:technologyType>1</v40:technologyType>
            <v40:capabilityOverall>7</v40:capabilityOverall>
            <v40:capabilityHardware>1</v40:capabilityHardware>
            <v40:capabilityFirmware>2</v40:capabilityFirmware>
        </v40:capability>
        <v40:capability>
            <v40:technologyType>2</v40:technologyType>
            <v40:capabilityOverall>1</v40:capabilityOverall>
            <v40:capabilityHardware>2</v40:capabilityHardware>
            <v40:capabilityFirmware>0</v40:capabilityFirmware>
        </v40:capability>
        <v40:capability>
            <v40:technologyType>3</v40:technologyType>
            <v40:capabilityOverall>2</v40:capabilityOverall>
            <v40:capabilityHardware>0</v40:capabilityHardware>
            <v40:capabilityFirmware>1</v40:capabilityFirmware>
        </v40:capability>
        <v40:comment>CPE Info Comment</v40:comment>
    </v40:cpeInfo>
    <v40:stabilityInfo>
        <v40:overallStability>3</v40:overallStability>
        <v40:codingViolationDownstreamStability>3</v40:codingViolationDownstreamStability>
        <v40:codingViolationUpstreamStability>3</v40:codingViolationUpstreamStability>
    </v40:stabilityInfo>

```

```
<v40:severelyErrorSecondsDownstreamStability>3</v40:severelyErrorSecondsDownstreamStability>

<v40:severelyErrorSecondsUpstreamStability>3</v40:severelyErrorSecondsUpstreamStability>
  <v40:spontaneousResyncsStability>1</v40:spontaneousResyncsStability>
  <v40:attainableActualBitrateRatio>2</v40:attainableActualBitrateRatio>
</v40:stabilityInfo>
<v40:endPoint>
  <v40:dnOffice>64BOL</v40:dnOffice>
  <v40:site>BOL</v40:site>
  <v40:bbDeviceLocation>DELOC</v40:bbDeviceLocation>
  <v40:siteCategory>28</v40:siteCategory>
  <v40:availableTechnologyTypes>
    <v40:technologyType>1</v40:technologyType>
    <v40:technologyType>2</v40:technologyType>
  </v40:availableTechnologyTypes>
</v40:endPoint>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startDateTime>2020-04-02T13:07:41.000+02:00</v40:startDateTime>
  <v40:endDateTime>2020-04-04T13:07:41.000+02:00</v40:endDateTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startDateTime>2020-04-06T13:07:41.000+02:00</v40:startDateTime>
  <v40:endDateTime>2020-04-08T13:07:41.000+02:00</v40:endDateTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>
<v40:dslamAlarm>
  <v40:dslamAlarmType>CAN-Card</v40:dslamAlarmType>
  <v40:startDateTime>2020-04-09T13:07:41.000+02:00</v40:startDateTime>
  <v40:expectedRepairTime>48</v40:expectedRepairTime>
</v40:dslamAlarm>
<v40:measurementHistoryItem>
  <v40:date>2020-04-08T12:00:00.000+02:00</v40:date>
  <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
  <v40:codingViolationsUp>3</v40:codingViolationsUp>
  <v40:codingViolationsDown>27</v40:codingViolationsDown>
  <v40:noiseMarginUp>16</v40:noiseMarginUp>
  <v40:noiseMarginDown>9</v40:noiseMarginDown>
  <v40:noiseMarginUnit>dB</v40:noiseMarginUnit>
  <v40:actualBitrateUp>16512</v40:actualBitrateUp>
  <v40:actualBitrateDown>88064</v40:actualBitrateDown>
  <v40:actualBitrateUnit>kb/s</v40:actualBitrateUnit>
  <v40:attainableBitrateUp>32428</v40:attainableBitrateUp>
  <v40:attainableBitrateDown>300010</v40:attainableBitrateDown>
  <v40:attainableBitrateUnit>kb/s</v40:attainableBitrateUnit>
  <v40:attenuationUp>6</v40:attenuationUp>
  <v40:attenuationDown>6</v40:attenuationDown>
  <v40:attenuationUnit>dB</v40:attenuationUnit>
  <v40:dslamName>ipc-bol640-s-vd-01</v40:dslamName>
  <v40:bbLogPortNr>1/2/3/4</v40:bbLogPortNr>
  <v40:measuredTime>86400</v40:measuredTime>
  <v40:serialNumber>7C26649B6B20 F5360 SG4D10001362</v40:serialNumber>
  <v40:severelyErrorSecDown>5</v40:severelyErrorSecDown>
  <v40:severelyErrorSecUp>0</v40:severelyErrorSecUp>

<v40:codingViolationsDown15Minutes>48;41;15;84;0;92;69;60;62;18;14;36;40;10;2;6;1;3;24;17;50;54;30;4
0;84;69;59;66;63;41;24;4;0;1;9;30;25;61;69;42;12;12;64;90;4;76;50;0;7;20;2;0;9;38;4;22;46;21;52;0;21
;17;18;31;59;40;26;19;3;4;14;5;57;47;2;59;19;8;69;56;84;27;54;5;26;12;1;8;17;21;28;66;69;14;2;18</v4
0:codingViolationsDown15Minutes>

<v40:codingViolationsUp15Minutes>0;9;6;45;0;71;60;59;68;23;20;62;85;32;21;29;1;1;0;4;20;30;19;31;73;
67;64;82;89;69;51;13;4;7;11;11;0;14;28;23;8;9;56;88;4;95;70;0;15;65;21;3;12;15;0;5;19;11;34;0;19;16;
```

```

20;39;84;67;57;62;35;22;17;2;0;11;1;32;12;6;60;55;92;34;77;8;55;38;14;42;21;8;0;16;28;7;1;14</v40:co
dingViolationsUp15Minutes>

<v40:severelyErrorSecDown15Minutes>77;67;53;34;15;28;7;0;8;13;8;59;18;66;43;87;83;41;39;27;19;53;34;
1;8;2;2;7;9;9;13;9;38;75;73;25;50;2;59;51;1;31;14;1;3;10;16;40;29;65;39;46;48;82;13;37;18;0;9;27;6;1
;11;12;46;52;45;37;38;80;89;73;25;29;26;32;1;14;13;0;7;22;32;8;60;39;59;94;49;74;8;43;40;28;7;7</v40
:severelyErrorSecDown15Minutes>

<v40:severelyErrorSecUp15Minutes>77;75;67;50;27;63;26;0;27;13;2;3;5;29;24;59;66;37;39;30;24;78;60;3;
29;44;9;7;2;0;3;4;21;51;58;22;50;2;74;75;1;72;52;32;13;10;4;2;8;28;22;32;38;73;13;42;22;0;15;62;21;3
2;38;12;13;3;12;16;22;54;70;65;25;32;33;46;2;32;46;10;25;22;9;0;16;17;33;64;39;66;8;48;50;42;13;16</
v40:severelyErrorSecUp15Minutes>
  <v40:accessSpeedProfileNr>190</v40:accessSpeedProfileNr>
  <v40:interleaveMode>2</v40:interleaveMode>
  <v40:psdClass>20</v40:psdClass>
</v40:measurementHistoryItem>
<v40:measurementHistoryItem>
  <v40:date>2020-04-07T12:00:00.000+02:00</v40:date>
  <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
  <v40:codingViolationsUp>4</v40:codingViolationsUp>
  <v40:codingViolationsDown>28</v40:codingViolationsDown>
  <v40:noiseMarginUp>17</v40:noiseMarginUp>
  <v40:noiseMarginDown>10</v40:noiseMarginDown>
  <v40:noiseMarginUnit>dB</v40:noiseMarginUnit>
  <v40:actualBitrateUp>16512</v40:actualBitrateUp>
  <v40:actualBitrateDown>88064</v40:actualBitrateDown>
  <v40:actualBitrateUnit>kb/s</v40:actualBitrateUnit>
  <v40:attainableBitrateUp>32438</v40:attainableBitrateUp>
  <v40:attainableBitrateDown>300011</v40:attainableBitrateDown>
  <v40:attainableBitrateUnit>kb/s</v40:attainableBitrateUnit>
  <v40:attenuationUp>7</v40:attenuationUp>
  <v40:attenuationDown>7</v40:attenuationDown>
  <v40:attenuationUnit>dB</v40:attenuationUnit>
  <v40:dslamName>ipc-bol640-s-vd-01</v40:dslamName>
  <v40:bbLogPortNr>1/2/3/4</v40:bbLogPortNr>
  <v40:measuredTime>86401</v40:measuredTime>
  <v40:serialNumber>7C26649B6B20 F5360 SG4D10001362</v40:serialNumber>
  <v40:severelyErrorSecDown>6</v40:severelyErrorSecDown>
  <v40:severelyErrorSecUp>1</v40:severelyErrorSecUp>

<v40:codingViolationsDown15Minutes>60;17;14;56;81;10;43;8;7;60;44;35;3;0;3;13;11;49;16;73;33;83;57;6
0;74;81;29;25;34;24;9;0;2;7;15;3;66;40;85;88;22;94;57;33;17;60;44;11;15;1;8;19;11;19;29;61;36;44;25;
14;50;60;74;60;40;31;10;2;2;14;32;44;28;31;17;96;81;33;51;77;45;66;3;17;14;2;8;29;11;13;8;66;1;27;15
;90</v40:codingViolationsDown15Minutes>

<v40:codingViolationsUp15Minutes>16;7;8;38;64;9;43;9;9;88;77;81;13;7;10;13;3;2;4;32;19;56;45;53;74;9
1;37;37;61;55;35;8;8;7;4;0;18;17;48;60;18;83;57;37;21;88;77;27;54;23;27;19;3;1;8;26;20;30;20;13;50;6
8;93;89;70;70;37;49;7;14;9;2;7;13;10;66;64;30;51;87;57;96;5;40;50;36;28;29;3;0;2;29;1;18;12;80</v40:
codingViolationsUp15Minutes>

<v40:severelyErrorSecDown15Minutes>70;16;10;28;28;1;0;1;3;45;53;73;15;11;21;45;23;76;19;66;23;42;19;
10;0;15;12;18;42;49;41;12;17;24;31;4;77;36;59;44;7;16;0;6;7;44;53;24;64;35;57;62;23;29;34;55;25;22;8
;2;0;11;32;45;48;63;43;75;16;48;68;68;32;28;12;49;28;5;0;15;19;49;3;36;58;55;60;97;23;20;10;60;1;14;
5;15</v40:severelyErrorSecDown15Minutes>

<v40:severelyErrorSecUp15Minutes>80;20;15;52;67;7;27;4;2;9;5;23;7;6;15;36;21;77;21;86;34;77;48;43;45
;40;10;3;4;15;19;7;12;19;28;4;89;47;89;82;19;68;35;16;6;9;5;7;30;21;40;50;21;29;39;71;37;41;21;10;31
;30;25;9;5;20;20;44;11;38;62;70;37;36;18;90;67;24;31;38;15;10;0;11;27;32;42;78;21;21;11;78;1;25;13;6
5</v40:severelyErrorSecUp15Minutes>
  <v40:accessSpeedProfileNr>190</v40:accessSpeedProfileNr>
  <v40:interleaveMode>2</v40:interleaveMode>
  <v40:psdClass>20</v40:psdClass>
</v40:measurementHistoryItem>
<v40:bbAdslEmulated>1</v40:bbAdslEmulated>
<v40:dslamName>IPC-SUR710-S-DM-04</v40:dslamName>

```

```

<v40:networkType>3</v40:networkType>
<v40:psdClass>20</v40:psdClass>
<v40:userName>HP Tester</v40:userName>
<v40:vectorized>true</v40:vectorized>
<v40:bbPortLineType>1</v40:bbPortLineType>
<v40:netDrivenInfo>
  <v40:reasonOfPotential>
    <v40:potential>
      <v40:potentialCode>-1000</v40:potentialCode>
      <v40:potentialDescription>stability issue - outstanding downgrooming
(ServiceImpact)</v40:potentialDescription>
    </v40:potential>
    <v40:potential>
      <v40:potentialCode>1000</v40:potentialCode>
      <v40:potentialDescription>Pending upgrooming</v40:potentialDescription>
    </v40:potential>
    <v40:potential>
      <v40:potentialCode>1001</v40:potentialCode>
      <v40:potentialDescription>old CPE Firmware</v40:potentialDescription>
    </v40:potential>
  </v40:reasonOfPotential>
  <v40:lqsMaxTechnologyType>1</v40:lqsMaxTechnologyType>
  <v40:lqsMaxAccessProfileNr>59</v40:lqsMaxAccessProfileNr>
  <v40:naFailureType>0</v40:naFailureType>
  <v40:naMaxTechnologyType>1</v40:naMaxTechnologyType>
  <v40:naMaxAccessProfileNr>62</v40:naMaxAccessProfileNr>
</v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 2</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-08T02:16:55.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 2</v40:inputReason>
  <v40:action>aAction 2</v40:action>
  <v40:initiator>aInitiator 2</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>
    <v40:psdClass>4</v40:psdClass>
    <v40:technologyType>1</v40:technologyType>
    <v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
  </v40:portConfigBeforeAction>
  <v40:portConfigAfterAction>
    <v40:technology>1</v40:technology>
    <v40:psdClass>11</v40:psdClass>
    <v40:technologyType>2</v40:technologyType>
    <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
    <v40:interleaveMode>3</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
  </v40:portConfigAfterAction>
</v40:lastNetDrivenAction>
<v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 1</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-07T14:16:55.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 1</v40:inputReason>
  <v40:action>aAction 1</v40:action>
  <v40:initiator>aInitiator 1</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>
    <v40:psdClass>4</v40:psdClass>
    <v40:technologyType>1</v40:technologyType>
    <v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
  </v40:portConfigBeforeAction>
  <v40:portConfigAfterAction>
    <v40:technology>1</v40:technology>
    <v40:psdClass>11</v40:psdClass>
    <v40:technologyType>2</v40:technologyType>
    <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
    <v40:interleaveMode>3</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
  </v40:portConfigAfterAction>
</v40:lastNetDrivenAction>

```

```

</v40:portConfigBeforeAction>
<v40:portConfigAfterAction>
  <v40:technology>1</v40:technology>
  <v40:psdClass>11</v40:psdClass>
  <v40:technologyType>2</v40:technologyType>
  <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
  <v40:interleaveMode>3</v40:interleaveMode>
  <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
  <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
</v40:portConfigAfterAction>
</v40:lastNetDrivenAction>
<v40:lastNetDrivenAction>
  <v40:netDrivenProcess>LastProcess 0</v40:netDrivenProcess>
  <v40:runDateTime>2020-04-07T02:16:55.000+02:00</v40:runDateTime>
  <v40:inputReason>aInputReason 0</v40:inputReason>
  <v40:action>aAction 0</v40:action>
  <v40:initiator>aInitiator 0</v40:initiator>
  <v40:portConfigBeforeAction>
    <v40:technology>2</v40:technology>
    <v40:psdClass>4</v40:psdClass>
    <v40:technologyType>1</v40:technologyType>
    <v40:accessSpeedProfileNr>41</v40:accessSpeedProfileNr>
    <v40:interleaveMode>2</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>200000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>300000</v40:effectiveSpeedValueDown>
  </v40:portConfigBeforeAction>
  <v40:portConfigAfterAction>
    <v40:technology>1</v40:technology>
    <v40:psdClass>11</v40:psdClass>
    <v40:technologyType>2</v40:technologyType>
    <v40:accessSpeedProfileNr>35</v40:accessSpeedProfileNr>
    <v40:interleaveMode>3</v40:interleaveMode>
    <v40:effectiveSpeedValueUp>400000</v40:effectiveSpeedValueUp>
    <v40:effectiveSpeedValueDown>500000</v40:effectiveSpeedValueDown>
  </v40:portConfigAfterAction>
</v40:lastNetDrivenAction>
<v40:runningNetDrivenAction>
  <v40:netDrivenProcess>aNetdrivenProcess</v40:netDrivenProcess>
  <v40:startDateTime>2017-02-17T10:30:47.000+01:00</v40:startDateTime>
  <v40:inputReason>aInputReason2</v40:inputReason>
  <v40:currentStep>aCurrentStep</v40:currentStep>
  <v40:initiator>aInitiator2</v40:initiator>
</v40:runningNetDrivenAction>
</v40:netDrivenInfo>
<v40:meltResult>
  <v40:analysisDate>2020-04-09T14:18:43.000+02:00</v40:analysisDate>
  <v40:meltState>5</v40:meltState>
  <v40:lineLengthA>71</v40:lineLengthA>
  <v40:lineLengthB>54</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.011</v40:acvab>
    <v40:acvag>0.011</v40:acvag>
    <v40:acvbg>0.011</v40:acvbg>
    <v40:dcvab>-0.028</v40:dcvab>
    <v40:dcvag>-0.216</v40:dcvag>
    <v40:dcvbg>-0.189</v40:dcvbg>
    <v40:rab>10000000</v40:rab>
    <v40:rba>10000000</v40:rba>
    <v40:rag>10000000</v40:rag>
    <v40:rbg>10000000</v40:rbg>
    <v40:cab>92.0</v40:cab>
    <v40:cag>0.0</v40:cag>
    <v40:cbg>1.0</v40:cbg>
  </v40:meltLineState>
</v40:meltHistory>

```

```

<v40:analysisDate>2020-04-02T15:21:09.000+02:00</v40:analysisDate>
<v40:meltState>21</v40:meltState>
<v40:lineLengthA>81</v40:lineLengthA>
<v40:lineLengthB>17</v40:lineLengthB>
<v40:meltLineState>
  <v40:acvab>0.01</v40:acvab>
  <v40:acvag>0.01</v40:acvag>
  <v40:acvbg>0.011</v40:acvbg>
  <v40:dcvab>0.214</v40:dcvab>
  <v40:dcvag>0.09</v40:dcvag>
  <v40:dcvbg>0.184</v40:dcvbg>
  <v40:rab>9309356</v40:rab>
  <v40:rba>9897388</v40:rba>
  <v40:rag>9110815</v40:rag>
  <v40:rbg>9917266</v40:rbg>
  <v40:cab>79.65</v40:cab>
  <v40:cag>0.248</v40:cag>
  <v40:cbg>0.088</v40:cbg>
</v40:meltLineState>
</v40:meltHistory>
<v40:meltHistory>
  <v40:analysisDate>2020-03-26T15:21:09.000+01:00</v40:analysisDate>
  <v40:meltState>4</v40:meltState>
  <v40:lineLengthA>6</v40:lineLengthA>
  <v40:lineLengthB>25</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.011</v40:acvab>
    <v40:acvag>0.009</v40:acvag>
    <v40:acvbg>0.01</v40:acvbg>
    <v40:dcvab>0.175</v40:dcvab>
    <v40:dcvag>0.022</v40:dcvag>
    <v40:dcvbg>0.253</v40:dcvbg>
    <v40:rab>9092913</v40:rab>
    <v40:rba>9677953</v40:rba>
    <v40:rag>9261037</v40:rag>
    <v40:rbg>9826757</v40:rbg>
    <v40:cab>54.479</v40:cab>
    <v40:cag>0.035</v40:cag>
    <v40:cbg>0.126</v40:cbg>
  </v40:meltLineState>
</v40:meltHistory>
<v40:meltHistory>
  <v40:analysisDate>2020-04-02T14:18:44.000+02:00</v40:analysisDate>
  <v40:meltState>12</v40:meltState>
  <v40:lineLengthA>54</v40:lineLengthA>
  <v40:lineLengthB>21</v40:lineLengthB>
  <v40:meltLineState>
    <v40:acvab>0.012</v40:acvab>
    <v40:acvag>0.01</v40:acvag>
    <v40:acvbg>0.01</v40:acvbg>
    <v40:dcvab>0.282</v40:dcvab>
    <v40:dcvag>0.252</v40:dcvag>
    <v40:dcvbg>0.189</v40:dcvbg>
    <v40:rab>9184565</v40:rab>
    <v40:rba>9358906</v40:rba>
    <v40:rag>9651075</v40:rag>
    <v40:rbg>9877096</v40:rbg>
    <v40:cab>17.067</v40:cab>
    <v40:cag>0.035</v40:cag>
    <v40:cbg>0.279</v40:cbg>
  </v40:meltLineState>
</v40:meltHistory>
<v40:meltHistory>
  <v40:analysisDate>2020-03-26T14:18:44.000+01:00</v40:analysisDate>
  <v40:meltState>21</v40:meltState>

```

```
<v40:lineLengthA>88</v40:lineLengthA>
<v40:lineLengthB>77</v40:lineLengthB>
<v40:meltLineState>
  <v40:acvab>0.012</v40:acvab>
  <v40:acvag>0.011</v40:acvag>
  <v40:acvbg>0.009</v40:acvbg>
  <v40:dcvab>0.124</v40:dcvab>
  <v40:dcvag>0.01</v40:dcvag>
  <v40:dcvbg>0.184</v40:dcvbg>
  <v40:rab>9245008</v40:rab>
  <v40:rba>9584128</v40:rba>
  <v40:rag>9778620</v40:rag>
  <v40:rbg>9899919</v40:rbg>
  <v40:cab>67.734</v40:cab>
  <v40:cag>0.247</v40:cag>
  <v40:cbg>0.013</v40:cbg>
</v40:meltLineState>
</v40:meltHistory>
</v40:meltResult>
</v40:xdslInfo>
</v40:response>
</v40:getXdslInfoResponse>
</soapenv:Body>
</soapenv:Envelope>
```

5.2.3 GUI

xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

[xDSL Info](#) [NA Measurement History](#) [MEIT Measurements](#) [CPE Info](#) [Access Optimization](#) [Access Optimization History](#)
[Day Charts](#) [15 Min. Charts](#) [Reconfigure Line History](#) [Resync Line History](#)

Summary

Request Date 09. Apr. 2020 16:19:11
Response Date 09. Apr. 2020 16:19:49
User Name USER ISP
TSCC/INC-CA 000 OK
NA 000 OK
NA-CP -

Access

Contract Element BRC3_standalone
DN Office 6480L
BS Device Location DLOC
Site BCL
Site Category PUS-S
Available Technology Type VDSL2_VDSL Vectoring
DSLAM Name IRC-SLR710-S-DM-04
Network Type VADP
Vectorized Yes
BS Type VDSL
BS ADSL Emulated No
DN Type NetServices number
RR Port Line Type and
Interface Mode Intermediate Low
BS PSD Class Spec_VDSL2_17a
Session Type PPP
Access Profile SOM down / 10M up
Access Profile Type Full Flex
Technology Type VDSL Vectoring
CPE Status Open Pipe LOS Max
Splitter Ratio -
Splitter Cable -

State

Traffic Light 
xDSL Line Status up
Problem Description BridgeTap
Proposed Repair Action If the stability and performance is ok, then do nothing. Else check and correct the
Last Status Change Date/Time Without calling (install broadband ready).
01. Jun. 1970 00:00:00

Stability Info

Overall Stability good stability/quality
Coding Violation Down good stability/quality
Coding Violation Up good stability/quality
Severely Error seconds Down good stability/quality
Severely Error seconds Up good stability/quality
Spontaneous Resyncs bad stability/quality
Attainable Actual Bitrate Ratio High Margin

Parameters

Noise Margin Up 11.1 dB
Noise Margin Down 14 dB
Actual Bitrate Up 16304 kb/s
Actual Bitrate Down 55043 kb/s
Attainable Bitrate Up 28728 kb/s
Attainable Bitrate Down 83804 kb/s
Attenuation Up 16.9 dB
Attenuation Down 14.8 dB
Capacity Occupation Up 64 %
Capacity Occupation Down 81 %

ICA Result

Line Analysis Date/Time 15. Mar. 2016 14:46:13
Line Analysis Date/Time 10. Mar. 2016 14:46:13
Analysis State Notswitcheable
Analysis Type LCD
Problem Detected No problem detected
Potential Attain Bitrate Down -1
Potential Attain Bitrate Up -1
Potential Access Profile ENABLING
Access Speed Gain Down -1
Access Speed Gain Up -1
Access Problem Type no problem

ICA Problems

Description BridgeTap
Description Text BridgeTap
Confidence 90
Impact reduced. attainable rate us ds.quantified 9998 1528 kb/s
Impact Attain Bitrate Down 0
Impact Attain Bitrate Up 0
Remaining Time (min) -
Description Degraded Contact
Description Text Degraded Contact
Confidence 91
Impact reduced. attainable rate us ds.quantified 9998 1528 kb/s
Impact Attain Bitrate Down 0
Impact Attain Bitrate Up 0
Remaining Time (min) -

Additional Info

Calculated Line Length 362 m
Connection DE Line Length 872 m
Number of Spontaneous Resyncs 1

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info **NA Measurement History** MELT Measurements CPE Info Access Optimization Access Optimization History Day Charts 15 Min. Charts Reconfigure Line History
Resync Line History

Summary

Request Date 09. Apr. 2020 16:19:11
Response Date 09. Apr. 2020 16:19:40
User Name USER ISP
TIBCO/NC-CIA 000: OK
NA 000: OK
NA-CP -

Historical Measurement Values

Measured Date	Measured Time	DSLAM Name	Logical Port	Spontaneous Resyncs	Coding Violations up/down	Noise Margin up/down (dB)	Actual Bitrate up/down (kb/s)	Attainable Bitrate up/down (kb/s)	Attenuation up/down (dB)	Serial Number	Access Profile	Interleave Mode	BB PSD Class
08. Apr. 2020 12:00:00	86400	ipc-bol640-s- vd-01	1/2/3/4	1	3 / 27	16 / 9	16512 / 88064	32428 / 300010	6 / 6	7C26649B6B20 F5360 SG4D10001362	5M-80M down / 500k-15M up	Interleave Low	Spec_VDSL2_17a
07. Apr. 2020 12:00:00	86401	ipc-bol640-s- vd-01	1/2/3/4	1	4 / 28	17 / 10	16512 / 88064	32438 / 300011	7 / 7	7C26649B6B20 F5360 SG4D10001362	5M-80M down / 500k-15M up	Interleave Low	Spec_VDSL2_17a

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info NA Measurement History MELT Measurements **CPE Info** Access Optimization Access Optimization History Day Charts 15 Min. Charts Reconfigure Line History
Resync Line History

CPE Info

CPE Name ADB V226N1 Centro Grande
CPE Vendor Serial Number 7C26649B6B20 F5360 SG4D10001362
CPE Vendor Id B5004244434D206A
CPE System Vendor Id 3D005341474D0000
CPE Version Number AvfH43j2.26u 13

	Technology Type	Capability Overall	Capability Hardware	Capability Firmware
Capability	VDSL2	Not capable	yes	yes, but SFP needed
	VDSL Vectoring	capable	yes, but SFP needed	no
	G.FAST	friendly	no	yes

CPE Comment CPE Info Comment

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

[xDSL Info](#) [NA Measurement History](#) [MELT Measurements](#) [CPE Info](#) **[Access Optimization](#)** [Access Optimization History](#) [Day Charts](#) [15 Min. Charts](#) [Reconfigure Line History](#)

[Resync Line History](#)

Qualification Info

LQS Max Technology Type
LQS Max Access Profile
Interleave Mode
NA Failure Type
NA Max Technology Type
NA Max Access Profile

VDSL2
50M down / 10M up
Interleave Low
OK
VDSL2
44M down / 10M up

Reasons of Potential

Code	Description
-1000	stability issue - outstanding downgrooming (ServiceImpact)
1000	Pending upgrooming
1001	old CPE Firmware

Running Netdriven Action

Netdriven Process aNetdrivenProcess
Start Date/Time 17. Feb. 2017 10:30:47
Input Reason aInputReason2
Current Step aCurrentStep
Initiator aInitiator2

Last Netdriven Action

Netdriven Process LastProcess 2
Start Date/Time 08. Apr. 2020 04:19:44
Input Reason aInputReason 2
Action aAction 2
Initiator aInitiator 2

Port Config

	Before	After
BB PSD Class	VDSL_CAB04_1	VDSL_CAB11_1
Technology	VDSL2	ADSL
Technology Type	VDSL2	VDSL Vectoring
Access Profile	20M down / 6M up	25M down / 10M up
Interleave Mode	Interleave Low	Interleave Medium
Effective Speed / Virtual Profile	300M down / 200M up	500M down / 400M up

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

[xDSL Info](#) [NA Measurement History](#) [MELT Measurements](#) [CPE Info](#) [Access Optimization](#) **[Access Optimization History](#)** [Day Charts](#) [15 Min. Charts](#) [Reconfigure Line History](#)

[Resync Line History](#)

Past Netdriven Actions

Netdriven Process	LastProcess 2		
Start Date/Time	08. Apr. 2020 04:19:44		
Input Reason	aiInputReason 2		
Action	aAction 2		
Initiator	aiInitiator 2		
	Before	After	
	88 PSD Class VDSL_CAB04_1	VDSL_CAB11_1	
	Technology VDSL2	ADSL	
	Technology Type VDSL2	VDSL Vectoring	
Port Config	Access Profile 20M down / 6M up	25M down / 10M up	
	Interleave Mode Interleave Low	Interleave Medium	
	Effective Speed / Virtual Profile 300M down / 200M up	500M down / 400M up	
Netdriven Process	LastProcess 1		
Start Date/Time	07. Apr. 2020 16:19:44		
Input Reason	aiInputReason 1		
Action	aAction 1		
Initiator	aiInitiator 1		
	Before	After	
	88 PSD Class VDSL_CAB04_1	VDSL_CAB11_1	
	Technology VDSL2	ADSL	
	Technology Type VDSL2	VDSL Vectoring	
Port Config	Access Profile 20M down / 6M up	25M down / 10M up	
	Interleave Mode Interleave Low	Interleave Medium	
	Effective Speed / Virtual Profile 300M down / 200M up	500M down / 400M up	
Netdriven Process	LastProcess 0		
Start Date/Time	07. Apr. 2020 04:19:44		
Input Reason	aiInputReason 0		
Action	aAction 0		
Initiator	aiInitiator 0		
	Before	After	
	88 PSD Class VDSL_CAB04_1	VDSL_CAB11_1	
	Technology VDSL2	ADSL	
	Technology Type VDSL2	VDSL Vectoring	
Port Config	Access Profile 20M down / 6M up	25M down / 10M up	
	Interleave Mode Interleave Low	Interleave Medium	
	Effective Speed / Virtual Profile 300M down / 200M up	500M down / 400M up	

[Back](#) [Refresh](#) [Transaction Overview](#)





xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info NA Measurement History MELT Measurements CPE Info Access Optimization Access Optimization History **Day Charts** 15 Min. Charts Reconfigure Line History

Resync Line History

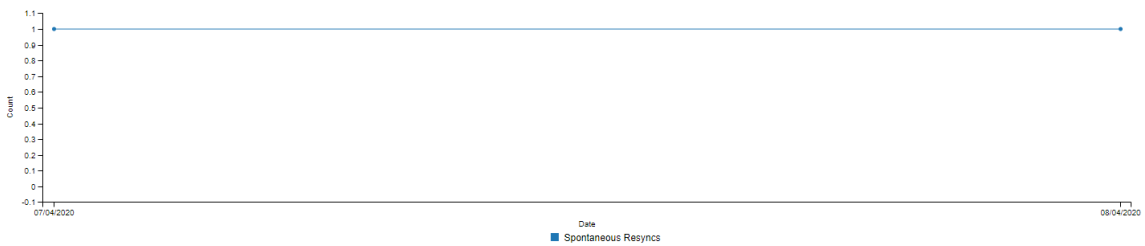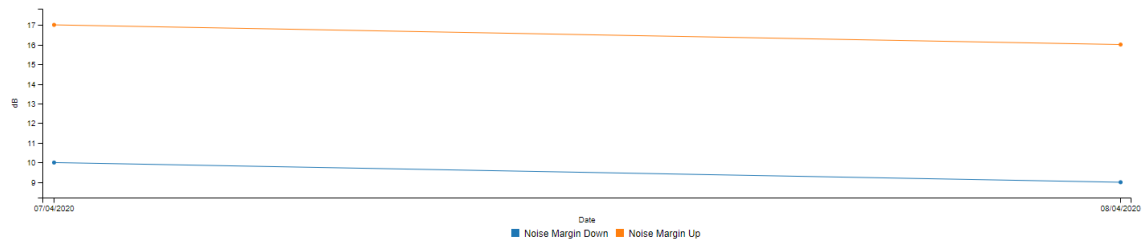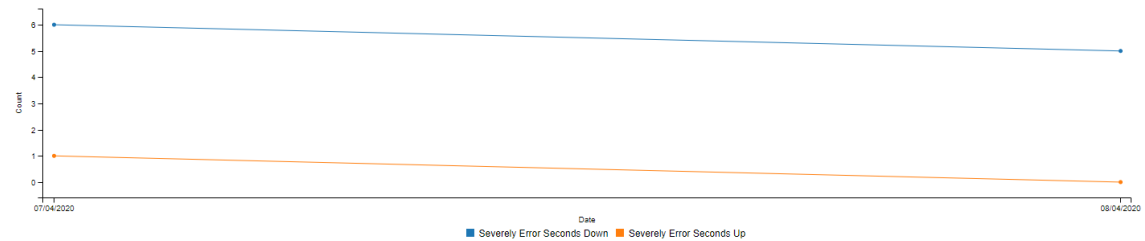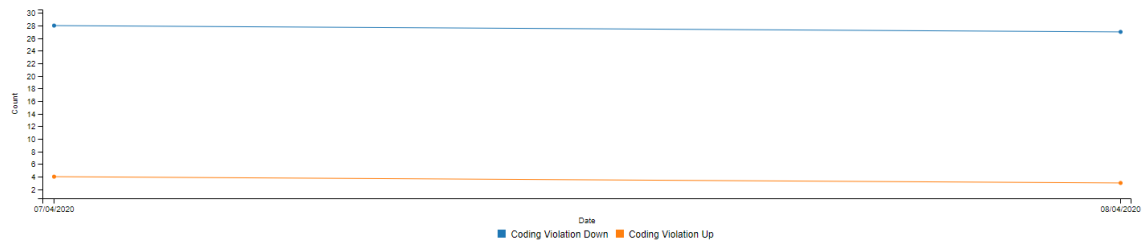

[Back](#) [Refresh](#) [Transaction Overview](#)





xDSL Info Result

ISP 100068 - Swisscom Mobile
DN / VN / NSN 0108284947

[Back](#) [Refresh](#) [Transaction Overview](#)

xDSL Info NA Measurement History MELT Measurements CPE Info Access Optimization Access Optimization History Day Charts **15 Min. Charts** [Reconfigure Line History](#)

Resync Line History

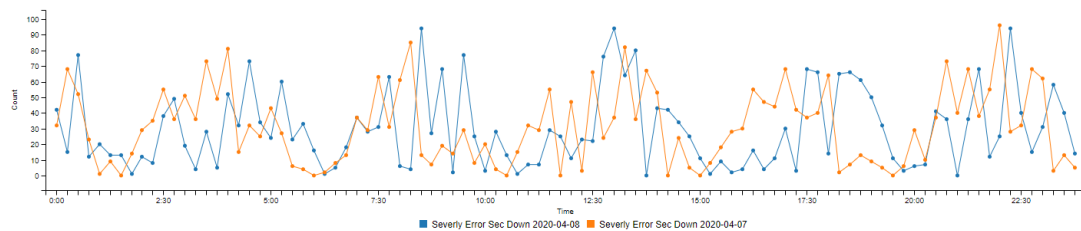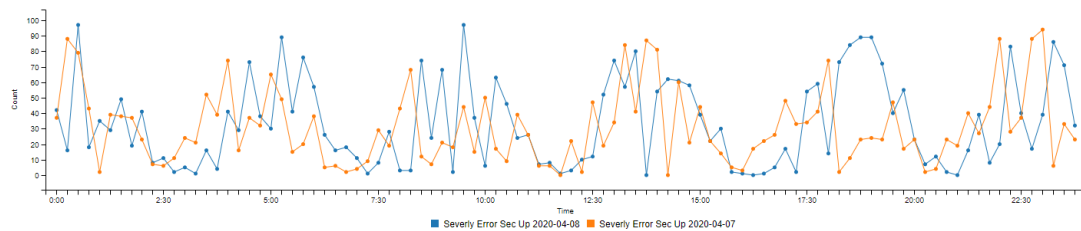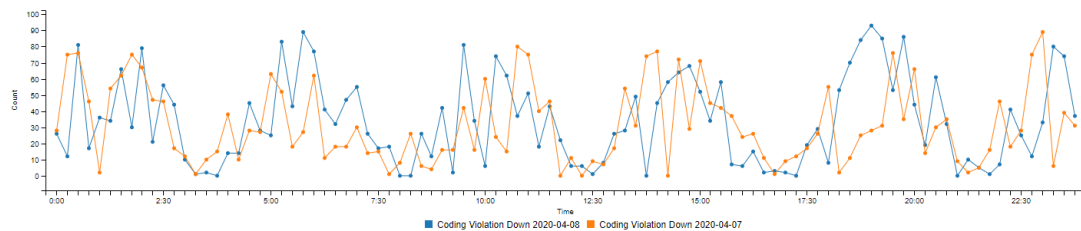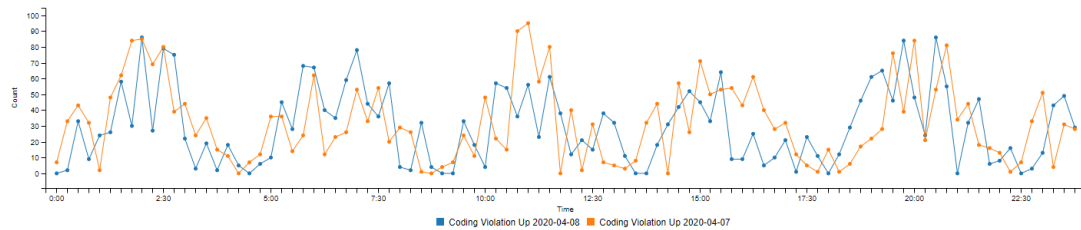

[Back](#) [Refresh](#) [Transaction Overview](#)

5.3 Get Appointment

If a field force at the customer location is needed schedule an appointment and use it at creation of the ticket. The sequence is get available timeslots, book appointment. If reschedule is needed get available time slots with the rescheduled appointment id and reschedule the appointment. An existing appointment may be cancelled.

5.3.1 Get Available Timeslots

5.3.1.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>${Header.Username}</wsse:Username>
        <wsse:Password>${Header.Password}</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security></soapenv:Header>
  <soapenv:Body>
    <v3:getAvailableTimeSlots>
      <v3:request correlationId="GetAvailableTimeSlots WS Tutorial">
        <v3:ispId>777710</v3:ispId>
        <v3:troubleTicketData>
          <v3:errorCategory>571</v3:errorCategory>
          <v3:dnVnNsn>0108891951</v3:dnVnNsn>
        </v3:troubleTicketData>
        <v3:fromDateTime>2018-06-02T00:00:00.000</v3:fromDateTime>
      </v3:request>
    </v3:getAvailableTimeSlots>
  </soapenv:Body>
</soapenv:Envelope>
```

5.3.1.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v3:getAvailableTimeSlotsResponse xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
      <v3:response correlationId="GetAvailableTimeSlots WS Tutorial">
        <v3:success>true</v3:success>
        <v3:bookingSessionId>000135111489839</v3:bookingSessionId>
        <v3:timeSlot>
          <v3:timeSlotId>13</v3:timeSlotId>
          <v3:timeSlotSize>10</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T08:00:08.895+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T17:00:08.895+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>true</v3:outOfSaSla>
          <v3:rank>29</v3:rank>
        </v3:timeSlot>
        <v3:timeSlot>
          <v3:timeSlotId>14</v3:timeSlotId>
          <v3:timeSlotSize>30</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T08:00:08.895+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T12:00:08.895+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>false</v3:outOfSaSla>
          <v3:rank>8</v3:rank>
        </v3:timeSlot>
        <v3:timeSlot>
          <v3:timeSlotId>15</v3:timeSlotId>
          <v3:timeSlotSize>30</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T13:00:08.895+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T17:00:08.895+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>true</v3:outOfSaSla>
          <v3:rank>98</v3:rank>
        </v3:timeSlot>
        <v3:timeSlot>
          <v3:timeSlotId>16</v3:timeSlotId>
          <v3:timeSlotSize>40</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T08:00:08.895+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T10:00:08.895+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>false</v3:outOfSaSla>
          <v3:rank>63</v3:rank>
        </v3:timeSlot>
      </v3:response>
    </v3:getAvailableTimeSlotsResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>17</v3:timeSlotId>
  <v3:timeSlotSize>40</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-04T10:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-04T12:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>false</v3:outOfSaSla>
  <v3:rank>88</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>18</v3:timeSlotId>
  <v3:timeSlotSize>40</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-04T13:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-04T15:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>false</v3:outOfSaSla>
  <v3:rank>22</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>20</v3:timeSlotId>
  <v3:timeSlotSize>10</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-05T08:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-05T17:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>34</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>21</v3:timeSlotId>
  <v3:timeSlotSize>30</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-05T08:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-05T12:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>6</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>23</v3:timeSlotId>
  <v3:timeSlotSize>40</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-05T08:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-05T10:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>6</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>24</v3:timeSlotId>
  <v3:timeSlotSize>40</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-05T10:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-05T12:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>43</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>25</v3:timeSlotId>
  <v3:timeSlotSize>40</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-05T13:00:08.895+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-05T15:00:08.895+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>40</v3:rank>
</v3:timeSlot>
<v3:timeSlot>
  <v3:timeSlotId>29</v3:timeSlotId>
  <v3:timeSlotSize>30</v3:timeSlotSize>
  <v3:timeSlotStartDateTime>2018-06-06T13:00:08.956+02:00</v3:timeSlotStartDateTime>
  <v3:timeSlotEndDateTime>2018-06-06T17:00:08.956+02:00</v3:timeSlotEndDateTime>
  <v3:outOfSaSla>true</v3:outOfSaSla>
  <v3:rank>91</v3:rank>
</v3:timeSlot>

```

```

        <v3:timeSlot>
          <v3:timeSlotId>31</v3:timeSlotId>
          <v3:timeSlotSize>40</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-06T10:00:08.956+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-06T12:00:08.956+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>true</v3:outOfSaSla>
          <v3:rank>26</v3:rank>
        </v3:timeSlot>
      </v3:timeSlot>
    </v3:response>
  </v3:getAvailableTimeSlotsResponse>
</soapenv:Body>
</soapenv:Envelope>

```

5.3.2 Book Appointment

5.3.2.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>${Header.Username}</wsse:Username>
        <wsse:Password>${Header.Password}</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v3:bookAppointment>
      <v3:request correlationId="BookAppointment WS Tutorial">
        <v3:ispId>777710</v3:ispId>
        <v3:bookingSessionId>000135111489839</v3:bookingSessionId>
        <v3:timeSlot>
          <v3:timeSlotId>13</v3:timeSlotId>
          <v3:timeSlotSize>10</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T08:00:08.895+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T17:00:08.895+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>true</v3:outOfSaSla>
          <v3:rank>29</v3:rank>
        </v3:timeSlot>
        <v3:outOfSaSlaReason>Customer</v3:outOfSaSlaReason>
      </v3:request>
    </v3:bookAppointment>
  </soapenv:Body>
</soapenv:Envelope>

```

5.3.2.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Body>
    <v3:bookAppointmentResponse xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
      <v3:response correlationId="BookAppointment WS Tutorial">
        <v3:success>true</v3:success>
        <v3:appointment>
          <v3:appointmentId>82907</v3:appointmentId>
          <v3:timeSlotStartDateTime>2018-06-04T08:00:08.895+02:00</v3:timeSlotStartDateTime>

```

```
</v3:timeSlotEndTime>2018-06-04T17:00:08.895+02:00</v3:timeSlotEndTime>
</v3:appointment>
</v3:response>
</v3:bookAppointmentResponse>
</soapenv:Body>
</soapenv:Envelope>
```

5.3.2.3 GUI

Book Appointment

Fri, 01/06/2018	Sat, 02/06/2018	Sun, 03/06/2018	Mon, 04/06/2018				Tue, 05/06/2018		
			08:00-10:00	10:00-12:00	13:00-15:00	15:00-17:00	10:00-12:00	13:00-15:00	15:00-17:00
			08:00-12:00		13:00-17:00		08:00-12:00		
			08:00-17:00						

Level Of Supp: Standard

Time Slot:

Out of SLA:

Out Of Sa Sla Reason:

From: 

5.3.3 Get Available Timeslots with Appointment

5.3.3.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
        wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>${Header.Username}</wsse:Username>
        <wsse:Password>${Header.Password}</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security></soapenv:Header>
    <soapenv:Body>
      <v3:getAvailableTimeSlots>
        <v3:request correlationId="GetAvailableTimeSlots with App WS Tutorial">
          <v3:ispId>777710</v3:ispId>
          <v3:appointmentIdOld>82907</v3:appointmentIdOld>
          <v3:fromDateTime>2018-06-02T00:00:00.000</v3:fromDateTime>
        </v3:request>
      </v3:getAvailableTimeSlots>
    </soapenv:Body>
  </soapenv:Envelope>
```

5.3.3.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v3:getAvailableTimeSlotsResponse xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
      <v3:response correlationId="GetAvailableTimeSlots with App WS Tutorial">
        <v3:success>true</v3:success>
      </v3:response>
    </v3:getAvailableTimeSlotsResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

    <v3:bookingSessionId>000135111530337</v3:bookingSessionId>
    <v3:timeSlot>
      <v3:timeSlotId>13</v3:timeSlotId>
      <v3:timeSlotSize>10</v3:timeSlotSize>
      <v3:timeSlotStartDateTime>2018-06-04T08:00:33.366+02:00</v3:timeSlotStartDateTime>
      <v3:timeSlotEndDateTime>2018-06-04T17:00:33.366+02:00</v3:timeSlotEndDateTime>
      <v3:outOfSaSla>true</v3:outOfSaSla>
      <v3:rank>99</v3:rank>
    </v3:timeSlot>
    <v3:timeSlot>
      <v3:timeSlotId>15</v3:timeSlotId>
      <v3:timeSlotSize>30</v3:timeSlotSize>
      <v3:timeSlotStartDateTime>2018-06-04T13:00:33.366+02:00</v3:timeSlotStartDateTime>
      <v3:timeSlotEndDateTime>2018-06-04T17:00:33.366+02:00</v3:timeSlotEndDateTime>
      <v3:outOfSaSla>true</v3:outOfSaSla>
      <v3:rank>92</v3:rank>
    </v3:timeSlot>
  ...
</v3:response>
</v3:getAvailableTimeSlotsResponse>
</soapenv:Body>
</soapenv:Envelope>

```

5.3.4 Reschedule Appointment

5.3.4.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>${Header.Username}</wsse:Username>
        <wsse:Password>${Header.Password}</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v3:rescheduleAppointment>
      <v3:request correlationId="reschedule WSG Tutorial">
        <v3:ispId>777710</v3:ispId>
        <v3:bookingSessionId>000135111530337</v3:bookingSessionId>
        <v3:timeSlot>
          <v3:timeSlotId>15</v3:timeSlotId>
          <v3:timeSlotSize>30</v3:timeSlotSize>
          <v3:timeSlotStartDateTime>2018-06-04T13:00:33.366+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T17:00:33.366+02:00</v3:timeSlotEndDateTime>
          <v3:outOfSaSla>true</v3:outOfSaSla>
          <v3:rank>92</v3:rank>
        </v3:timeSlot>
        <v3:outOfSaSlaReason>Swisscom</v3:outOfSaSlaReason>
        <v3:appointmentIdOld>82907</v3:appointmentIdOld>
      </v3:request>
    </v3:rescheduleAppointment>
  </soapenv:Body>
</soapenv:Envelope>

```

5.3.4.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v3:bookAppointmentResponse xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
      <v3:response correlationId="reschedule WSG Tutorial">
        <v3:success>true</v3:success>
      </v3:response>
    </v3:bookAppointmentResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

```

        <v3:appointment>
          <v3:appointmentId>386</v3:appointmentId>
          <v3:timeSlotStartDateTime>2018-06-04T13:00:33.366+02:00</v3:timeSlotStartDateTime>
          <v3:timeSlotEndDateTime>2018-06-04T17:00:33.366+02:00</v3:timeSlotEndDateTime>
        </v3:appointment>
      </v3:response>
    </v3:bookAppointmentResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

5.3.5 Cancel Appointment

5.3.5.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Header/>
  <soapenv:Body>
    <v3:cancelAppointment>
      <v3:request correlationId="cancelAppointmentRequest WS Tutorial">
        <v3:ispId>777710</v3:ispId>
        <v3:appointmentId>386</v3:appointmentId>
      </v3:request>
    </v3:cancelAppointment>
  </soapenv:Body>
</soapenv:Envelope>

```

5.3.5.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
  <soapenv:Body>
    <v3:cancelAppointmentResponse xmlns:v3="http://www.swisscom.com/wsg/appBook/v3">
      <v3:response correlationId="cancelAppointmentRequest WS Tutorial">
        <v3:success>true</v3:success>
      </v3:response>
    </v3:cancelAppointmentResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

5.4 Creation of a Trouble Ticket

If an existing BBCS subscription does not work (any more) a trouble ticket can be submitted as shown in the following example.

5.4.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:createTroubleTicket>
      <v40:request correlationId="createTroubleTicket">
        <v40:ispId>777710</v40:ispId>
        <v40:ispTtRef>WS_TEST_1</v40:ispTtRef>
        <v40:ispPhoneNr>0584443593</v40:ispPhoneNr>
        <v40:endUser>
          <v40:street>Schorenstrasse</v40:street>
          <v40:houseNr>68e</v40:houseNr>
          <v40:building>1a</v40:building>
          <v40:zip>3000</v40:zip>
          <v40:city>Bern</v40:city>
          <v40:endUserName>EndUserName</v40:endUserName>
          <v40:endUserLogin>REndUserLogin</v40:endUserLogin>
          <v40:endUserPhoneNr>0794140424</v40:endUserPhoneNr>
        </v40:endUser>
      </v40:request>
    </v40:createTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>

```

```

<v40:contactInfo>
  <v40:firstName>Hans</v40:firstName>
  <v40:lastName>Meier</v40:lastName>
  <v40:phoneNr>0313220133</v40:phoneNr>
  <v40:notificationType>2</v40:notificationType>
  <v40:notificationAddress>0786001221</v40:notificationAddress>
</v40:contactInfo>
<v40:dnVnNsn>0108542092</v40:dnVnNsn>
<v40:dnType>13</v40:dnType>
<v40:bbType>2</v40:bbType>
<v40:stnrDdi/>
<v40:problemDescription>any Problem with somewhat reason</v40:problemDescription>
<v40:problemDateTime>2009-09-01T09:30:47.0+02:00</v40:problemDateTime>
<v40:lastLoginDateTime>2009-09-01T08:30:47.0+02:00</v40:lastLoginDateTime>
<v40:comment>any comment</v40:comment>
<v40:serviceProblem>
  <v40:contrEleId>100</v40:contrEleId>
  <v40:serviceSpeedProfileNr>248</v40:serviceSpeedProfileNr>
  <v40:bbcsEquipment>Equipment</v40:bbcsEquipment>
  <v40:errorCategory>541</v40:errorCategory>
</v40:serviceProblem>
<v40:endUserNotificationType>Email</v40:endUserNotificationType>
<v40:endUserNotificationAddress>WS_TEST_Notif_Addr</v40:endUserNotificationAddress>
<v40:ispApplicationId>100900</v40:ispApplicationId>
<v40:ispApplicationEntityId/>
<v40:measuredIspValues>Measurements ISP</v40:measuredIspValues>
<v40:saSlaRequested>1</v40:saSlaRequested>
</v40:request>
</v40:createTroubleTicket>
</soapenv:Body>
</soapenv:Envelope>

```

5.4.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:createTroubleTicketResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
      <v40:response correlationId="">
        <v40:success>true</v40:success>
        <v40:operationLogId>432690575</v40:operationLogId>
        <v40:ttIdWsg>2447640</v40:ttIdWsg>
        <v40:ttState>1</v40:ttState>
        <v40:dnType>13</v40:dnType>
        <v40:bbType>2</v40:bbType>
      </v40:response>
    </v40:createTroubleTicketResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

5.4.3 GUI

Access Trouble Ticket Detail

Main
xDSL Info
Response
CPE Info
Billing

Ticket Header
Ticket ID 2447601
Ticket ID Sys SIM1232447601
Entered 12/07/2017 13:11
Closed 22/03/2010 11:11
Last modified 12/07/2017 13:12 by Pol
TT State CLOSED
Suspended No

SLA
Contr Element Best Effort
SA SLA Intermediate
SA SLA (Requested) -
SA SLA (Calculated) Intermediate
SA SLA Overruled No

Checklist
Problem Date/Time 01/09/2009 09:30
Last successful login 01/09/2009 08:30
TT Error Category 541 - No Signal

DN Info
DN / VN / NSN 0108542092
DN / VN / NSN (Requested) 0108542092

Current Endpoint
DN Office 64BOL
BB Device Location BOL
Site BOL
Site Category RUS
DSLAM Name IPC-HIR710-S-DM-11
Dslam Type CAN
Available Technology Type VDSL Vectoring

Connection
BBCS connection type Netservices number
BB Type VDSL
BB ADSL Emulated No
Speed Profile Nr max 2M down / 400k up
Service Profile (Requested) max 2M down / 400k up
Op Status Open Pipe Measure
Technology Type VDSL2
Vectorized No
Reason of Potential -

Fiber Info
OTO Id -
OTO Plug Nr -
OTO Partner Label -
BEP Site Category -

ISP
ISP 777710 Testaccount WSG Team
ISP phone 0584443593
ISP ticket ref. WS_TEST_1
ISP Application ID 100900
ISP Application Entity ID -

End User
End User Login REndUserLogin
End User Name EndUserName
End User Phone 0794140424
End User Company -
End User Street/Nr Schorenstrasse 68e
Building 1a
End User ZIP/City 3000 Bern

Contact Info
Contact Person First Name Hans
Contact Person Last Name Meier
Contact Person Phone 0313220133
Contact Notification Type SMS
Contact Notification EMail/SMS-Nr im Haus

Site Development
Fully Developed -
Nr of Utilisation Units -
Nr of Basic Connectivities -

Problem description
any Problem with somewhat reason

Comment
any comment

Measured ISP Values
Measurements ISP

5.4.4 Trouble Ticket Detail

If, at any stage of the processing, the data retrieved via the Notification Service is not sufficient, then all the data of order can be retrieved by using the “getDetailBbcsTroubleTicket” operation of the Web service.

Get Detail shows an example of the data that can be retrieved.

5.4.5 Notifications

During the whole processing, the trouble tickets can be tracked by retrieving notifications from the Notification Service.

See 8 Appendix B: Notifications created for “Assurance (BBCS Trouble Ticket)” shows all notifications produced during the processing of the TT above

5.4.6 Trouble Ticket Types and Restrictions

- For BBCS copper lines, a trouble ticket is only possible on one of the implemented services ("BestEffort", "Streaming" or "RealTime"); you cannot create a trouble ticket for a BBCS base Contract Element.
- For BBCS fiber lines a trouble ticket is only possible on one of the implemented services ("BestEffort on Fiber")
- For ULL lines ("Full-Access" or "Full-Access Subloop") a trouble ticket can be created on this service itself

5.5 Get Detail

5.5.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:getDetailTroubleTicket>
      <v40:request correlationId="getDetailTroubleTicket">
        <v40:ispId>777710</v40:ispId>
        <v40:ttIdWsg>2447640</v40:ttIdWsg>
      </v40:request>
    </v40:getDetailTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>
```

5.5.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:getDetailTroubleTicketResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
      <v40:response>
        <v40:succes>true</v40:succes>
        <v40:ticket>
          <v40:ttState>5</v40:ttState>
          <v40:entryDateTime>2019-10-30T09:43:18.000+01:00</v40:entryDateTime>
          <v40:lastModifiedDateTime>2019-10-30T09:43:39.000+01:00</v40:lastModifiedDateTime>
          <v40:lastModifiedUsername>SYSTEM</v40:lastModifiedUsername>
          <v40:problemDescription>any Problem with somewhat reason</v40:problemDescription>
          <v40:progressComment>message 1</v40:progressComment>
          <v40:billingAction>1</v40:billingAction>
        </v40:ticket>
      </v40:response>
    </v40:getDetailTroubleTicketResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```
<v40:ttIdWsg>2447640</v40:ttIdWsg>
<v40:ttIdSys>157242500332000</v40:ttIdSys>
<v40:ispTtRef>WS_TEST_1</v40:ispTtRef>
<v40:ispId>777710</v40:ispId>
<v40:ispName>Testaccount WSG Team</v40:ispName>
<v40:ispPhoneNr>0584443593</v40:ispPhoneNr>
<v40:comment>any comment</v40:comment>
<v40:contrEleId>100</v40:contrEleId>
<v40:errorCategory>541</v40:errorCategory>
<v40:problemDateTime>2009-09-01T09:30:00.000+02:00</v40:problemDateTime>
<v40:endUser>
  <v40:street>Schorenstrasse</v40:street>
  <v40:houseNr>68e</v40:houseNr>
  <v40:building>1a</v40:building>
  <v40:zip>3000</v40:zip>
  <v40:city>Bern</v40:city>
  <v40:endUserName>EndUserName</v40:endUserName>
  <v40:endUserLogin>REndUserLogin</v40:endUserLogin>
  <v40:endUserPhoneNr>0794140424</v40:endUserPhoneNr>
</v40:endUser>
<v40:contactInfo>
  <v40:firstName>Hans</v40:firstName>
  <v40:lastName>Meier</v40:lastName>
  <v40:phoneNr>0313220133</v40:phoneNr>
  <v40:language>de</v40:language>
  <v40:notificationType>2</v40:notificationType>
  <v40:notificationAddress>0786001221</v40:notificationAddress>
  <v40:preferredContactType>1</v40:preferredContactType>
</v40:contactInfo>
<v40:dnVnNsn>0108542092</v40:dnVnNsn>
<v40:dnVnNsnReq>0108542092</v40:dnVnNsnReq>
<v40:dnType>13</v40:dnType>
<v40:bbType>2</v40:bbType>
<v40:serviceSpeedProfileNr>248</v40:serviceSpeedProfileNr>
<v40:serviceSpeedProfileNrReq>248</v40:serviceSpeedProfileNrReq>
<v40:cableBox>
  <v40:boardNr>10000</v40:boardNr>
  <v40:switchingPlaceNr>1</v40:switchingPlaceNr>
  <v40:contactType>1</v40:contactType>
  <v40:contactNr>1</v40:contactNr>
</v40:cableBox>
<v40:lastLoginDateTime>2009-09-01T08:30:00.000+02:00</v40:lastLoginDateTime>
<v40:ttSaSla>4</v40:ttSaSla>
<v40:wsgSaSla>4</v40:wsgSaSla>
<v40:bbcsEquipment>Equipment</v40:bbcsEquipment>
<v40:suspended>>false</v40:suspended>
<v40:nrOfWires>2</v40:nrOfWires>
<v40:ppId>0</v40:ppId>
<v40:lineMeasurementData>
  <v40:noiseMarginUp>11.1</v40:noiseMarginUp>
  <v40:noiseMarginDown>14</v40:noiseMarginDown>
  <v40:actualBitrateUp>16504</v40:actualBitrateUp>
  <v40:actualBitrateDown>55040</v40:actualBitrateDown>
  <v40:attainableBitrateUp>23728</v40:attainableBitrateUp>
  <v40:attainableBitrateDown>16.8</v40:attainableBitrateDown>
  <v40:attenuationDown>14.8</v40:attenuationDown>
  <v40:nrSpontaneousResyncs>1</v40:nrSpontaneousResyncs>
  <v40:calculatedLineLength>862</v40:calculatedLineLength>
  <v40:correctionDbLineLength>872</v40:correctionDbLineLength>
  <v40:xdslLineState>up</v40:xdslLineState>
  <v40:lastStatusChange>1970-01-01T01:00:00.000+01:00</v40:lastStatusChange>
  <v40:icaResult>
    <v40:analysisDate>2016-03-15T14:46:15.000+01:00</v40:analysisDate>
    <v40:analysisDate24h>2016-03-10T14:46:15.000+01:00</v40:analysisDate24h>
    <v40:analysisState>6</v40:analysisState>
  </v40:icaResult>
</v40:lineMeasurementData>
```

```

<v40:analysisType>1</v40:analysisType>
<v40:problemDetected>0</v40:problemDetected>
<v40:potentialAttainBitrateDown>-1</v40:potentialAttainBitrateDown>
<v40:potentialAttainBitrateUp>-1</v40:potentialAttainBitrateUp>
<v40:potentialAccessProfileNr>0</v40:potentialAccessProfileNr>
<v40:accessSpeedGainDown>-1</v40:accessSpeedGainDown>
<v40:accessSpeedGainUp>-1</v40:accessSpeedGainUp>
<v40:accessProblemType>0</v40:accessProblemType>
<v40:bbrSocketInstalled>>false</v40:bbrSocketInstalled>
<v40:bbrSocketInstallationDate>1970-01-
01T02:00:00.000+01:00</v40:bbrSocketInstallationDate>
<v40:icaProblems>
  <v40:description>1</v40:description>
  <v40:descriptionText>BridgeTap</v40:descriptionText>
  <v40:confidence>90</v40:confidence>
  <v40:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v40:impact>
  <v40:impactAttainBitrateDown>0</v40:impactAttainBitrateDown>
  <v40:impactAttainBitrateUp>0</v40:impactAttainBitrateUp>
</v40:icaProblems>
<v40:icaProblems>
  <v40:description>2</v40:description>
  <v40:descriptionText>Degraded Contact</v40:descriptionText>
  <v40:confidence>91</v40:confidence>
  <v40:impact>reduced.attainable.rate.us.ds.quantified 6968 1528
kb/s</v40:impact>
  <v40:impactAttainBitrateDown>0</v40:impactAttainBitrateDown>
  <v40:impactAttainBitrateUp>0</v40:impactAttainBitrateUp>
</v40:icaProblems>
</v40:icaResult>
</v40:lineMeasurementData>
<v40:opStatus>7</v40:opStatus>
<v40:ispApplicationId>100900</v40:ispApplicationId>
<v40:bbAdslEmulated>1</v40:bbAdslEmulated>
<v40:measuredIspValues>Measurements ISP</v40:measuredIspValues>
<v40:workLogList xsi:type="v40:workLogExtendedType">
  <v40:workLogSummary>OTDR-Measurements-CO</v40:workLogSummary>
  <v40:workLogNotes>OTDR-Interruption 12345
OTDR-Attenuation 67890</v40:workLogNotes>
  <v40:workLogDateTime>2019-10-30T09:43:39.000+01:00</v40:workLogDateTime>
  <v40:createdByBackendSystem>true</v40:createdByBackendSystem>
</v40:workLogList>
<v40:workLogList xsi:type="v40:workLogExtendedType">
  <v40:workLogSummary>OTDR-Measurements-CUST</v40:workLogSummary>
  <v40:workLogNotes>OTDR-Interruption 09876
OTDR-Attenuation 54321</v40:workLogNotes>
  <v40:workLogDateTime>2019-10-30T09:43:39.000+01:00</v40:workLogDateTime>
  <v40:createdByBackendSystem>true</v40:createdByBackendSystem>
</v40:workLogList>
<v40:workLogList xsi:type="v40:workLogExtendedType">
  <v40:workLogSummary>3. Summary from Simulator: status=openActivate triggered by
create</v40:workLogSummary>
  <v40:workLogNotes>3 - This is a Note from the TIBCO Simulator --- (3. Summary
from Simulator: status=openActivate triggered by create) --- WorkLogText 1: $fä .-{}è!ü"![]&lt;
123 ABC öäü --</v40:workLogNotes>
  <v40:workLogDateTime>2019-10-30T09:43:39.000+01:00</v40:workLogDateTime>
  <v40:createdByBackendSystem>true</v40:createdByBackendSystem>
</v40:workLogList>
<v40:workLogList xsi:type="v40:workLogExtendedType">
  <v40:workLogSummary>2. Summary from Simulator: status=openActivate triggered by
create</v40:workLogSummary>
  <v40:workLogNotes>2 - This is a Note from the TIBCO Simulator --- (2. Summary
from Simulator: status=openActivate triggered by create) --- WorkLogText 1: $fä .-{}è!ü"![]&lt;
123 ABC öäü --</v40:workLogNotes>
  <v40:workLogDateTime>2019-10-30T09:43:39.000+01:00</v40:workLogDateTime>

```

```

        <v40:createdByBackendSystem>true</v40:createdByBackendSystem>
    </v40:workLogList>
    <v40:workLogList xsi:type="v40:workLogExtendedType">
        <v40:workLogSummary>1. Summary from Simulator: status=openActivate triggered by
create</v40:workLogSummary>
        <v40:workLogNotes>1 - This is a Note from the TIBCO Simulator --- (1. Summary
from Simulator: status=openActivate triggered by create) --- WorkLogText 1: $fä .-{}è!ü"![]&lt;
123 ABC öäü --</v40:workLogNotes>
        <v40:workLogDateTime>2019-10-30T09:43:39.000+01:00</v40:workLogDateTime>
        <v40:createdByBackendSystem>true</v40:createdByBackendSystem>
    </v40:workLogList>
    <v40:historyItem>
        <v40:ttState>4</v40:ttState>
        <v40:entryDateTime>2019-10-30T09:43:18.000+01:00</v40:entryDateTime>
        <v40:lastModifiedDateTime>2019-10-
30T09:43:23.000+01:00</v40:lastModifiedDateTime>
        <v40:lastModifiedUsername>WSG Backend</v40:lastModifiedUsername>
        <v40:responseComment>Ticket successfully sent to ITSM (createTT): id=2447640
TicketIdItsm=157242500332000</v40:responseComment>
        <v40:problemDescription>any Problem with somewhat
reason</v40:problemDescription>
        <v40:billingAction>1</v40:billingAction>
    </v40:historyItem>
    <v40:historyItem>
        <v40:ttState>3</v40:ttState>
        <v40:entryDateTime>2019-10-30T09:43:18.000+01:00</v40:entryDateTime>
        <v40:lastModifiedDateTime>2019-10-
30T09:43:20.000+01:00</v40:lastModifiedDateTime>
        <v40:lastModifiedUsername>Batch</v40:lastModifiedUsername>
        <v40:problemDescription>any Problem with somewhat
reason</v40:problemDescription>
        <v40:billingAction>1</v40:billingAction>
    </v40:historyItem>
    <v40:historyItem>
        <v40:ttState>1</v40:ttState>
        <v40:entryDateTime>2019-10-30T09:43:18.000+01:00</v40:entryDateTime>
        <v40:lastModifiedDateTime>2019-10-
30T09:43:18.000+01:00</v40:lastModifiedDateTime>
        <v40:lastModifiedUsername>HP Tester</v40:lastModifiedUsername>
        <v40:problemDescription>any Problem with somewhat
reason</v40:problemDescription>
        <v40:billingAction>1</v40:billingAction>
    </v40:historyItem>
    <v40:endPoint>
        <v40:dnOffice>64BOL</v40:dnOffice>
        <v40:site>BOL</v40:site>
        <v40:bbDeviceLocation>BOL</v40:bbDeviceLocation>
        <v40:siteCategory>6</v40:siteCategory>
        <v40:availableTechnologyTypes>
            <v40:technologyType>2</v40:technologyType>
        </v40:availableTechnologyTypes>
    </v40:endPoint>
    <v40:cpeInfo>
        <v40:cpeName>Motorola 7347-44 POTS rel.7.9</v40:cpeName>
    </v40:cpeInfo>
    <v40:vectorized>>false</v40:vectorized>
    <v40:technologyType>1</v40:technologyType>
    </v40:ticket>
</v40:response>
</v40:getDetailTroubleTicketResponse>
</soapenv:Body>
</soapenv:Envelope>

```

5.6 AccessProfile modification

You have the possibility to check the valid access Profiles for a defined line and to modify them.

5.6.1 getValidAccessProfiles

5.6.1.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v40:getValidAccessProfilesRequest>
      <v40:request correlationId="getValidAccessProfiles">
        <v40:ispId>777710</v40:ispId>
        <v40:dnVnNsn>0108542092</v40:dnVnNsn>
      </v40:request>
    </v40:getValidAccessProfilesRequest>
  </soapenv:Body>
</soapenv:Envelope>
```

5.6.1.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:getValidAccessProfilesResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
      <v40:response correlationId="getValidAccessProfiles">
        <v40:success>true</v40:success>
        <v40:validAccessProfile>
          <v40:accessSpeedProfileNr>33</v40:accessSpeedProfileNr>
          <v40:psdClass>10</v40:psdClass>
          <v40:interleaveMode>3</v40:interleaveMode>
          <v40:bbType>2</v40:bbType>
          <v40:technologyType>1</v40:technologyType>
        </v40:validAccessProfile>
        <v40:validAccessProfile>
          <v40:accessSpeedProfileNr>33</v40:accessSpeedProfileNr>
          <v40:psdClass>20</v40:psdClass>
          <v40:interleaveMode>3</v40:interleaveMode>
          <v40:bbType>2</v40:bbType>
          <v40:technologyType>1</v40:technologyType>
        </v40:validAccessProfile>
        <v40:validAccessProfile>
          <v40:accessSpeedProfileNr>33</v40:accessSpeedProfileNr>
          <v40:psdClass>30</v40:psdClass>
          <v40:interleaveMode>3</v40:interleaveMode>
          <v40:bbType>2</v40:bbType>
          <v40:technologyType>1</v40:technologyType>
        </v40:validAccessProfile>
        <v40:validAccessProfile>
          <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
          <v40:psdClass>10</v40:psdClass>
          <v40:interleaveMode>2</v40:interleaveMode>
          <v40:bbType>2</v40:bbType>
          <v40:technologyType>1</v40:technologyType>
        </v40:validAccessProfile>
      </v40:response>
    </v40:getValidAccessProfilesResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>20</v40:psdClass>
  <v40:interleaveMode>2</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>30</v40:psdClass>
  <v40:interleaveMode>2</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>10</v40:psdClass>
  <v40:interleaveMode>3</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>20</v40:psdClass>
  <v40:interleaveMode>3</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>30</v40:psdClass>
  <v40:interleaveMode>3</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>10</v40:psdClass>
  <v40:interleaveMode>4</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>20</v40:psdClass>
  <v40:interleaveMode>4</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>30</v40:psdClass>
  <v40:interleaveMode>4</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
  <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
  <v40:psdClass>10</v40:psdClass>
  <v40:interleaveMode>5</v40:interleaveMode>
  <v40:bbType>2</v40:bbType>
  <v40:technologyType>1</v40:technologyType>
</v40:validAccessProfile>
<v40:validAccessProfile>
```

```

        <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
        <v40:interleaveMode>5</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
        <v40:psdClass>30</v40:psdClass>
        <v40:interleaveMode>5</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
        <v40:psdClass>10</v40:psdClass>
        <v40:interleaveMode>6</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
        <v40:interleaveMode>6</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>34</v40:accessSpeedProfileNr>
        <v40:psdClass>30</v40:psdClass>
        <v40:interleaveMode>6</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>158</v40:accessSpeedProfileNr>
        <v40:psdClass>10</v40:psdClass>
        <v40:interleaveMode>2</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>158</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
        <v40:interleaveMode>2</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>158</v40:accessSpeedProfileNr>
        <v40:psdClass>30</v40:psdClass>
        <v40:interleaveMode>2</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>158</v40:accessSpeedProfileNr>
        <v40:psdClass>10</v40:psdClass>
        <v40:interleaveMode>3</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>158</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
    
```

```

        <v40:interleaveMode>3</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>28</v40:accessSpeedProfileNr>
        <v40:psdClass>30</v40:psdClass>
        <v40:interleaveMode>3</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>28</v40:accessSpeedProfileNr>
        <v40:psdClass>10</v40:psdClass>
        <v40:interleaveMode>4</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>28</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
        <v40:interleaveMode>4</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
    <v40:validAccessProfile>
        <v40:accessSpeedProfileNr>28</v40:accessSpeedProfileNr>
        <v40:psdClass>30</v40:psdClass>
        <v40:interleaveMode>4</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
    </v40:validAccessProfile>
</v40:response>
</v40:getValidAccessProfilesResponse>
</soapenv:Body>
</soapenv:Envelope>

```

5.6.2 modifyAccessProfile

5.6.2.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v40:modifyAccessProfileRequest>
      <v40:request correlationId="anyCorrelation">
        <v40:ispId>777710</v40:ispId>
        <v40:dnVnNsn>0108542092</v40:dnVnNsn>
        <v40:accessSpeedProfileNr>33</v40:accessSpeedProfileNr>
        <v40:psdClass>20</v40:psdClass>
        <v40:interleaveMode>3</v40:interleaveMode>
        <v40:bbType>2</v40:bbType>
        <v40:technologyType>1</v40:technologyType>
      </v40:request>
    </v40:modifyAccessProfileRequest>
  </soapenv:Body>
</soapenv:Envelope>

```

```

    </v40:request>
  </v40:modifyAccessProfileRequest>
</soapenv:Body>
</soapenv:Envelope>

```

5.6.2.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:modifyAccessProfileResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
      <v40:response correlationId="anyCorrelation">
        <v40:success>true</v40:success>
        <v40:operationLogId>432690597</v40:operationLogId>
        <v40:orderNr>77771020191030000021000000</v40:orderNr>
      </v40:response>
    </v40:modifyAccessProfileResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

5.7 Connectivity Check

ISP can execute a Connectivity Check. The Check can be made either by DN / VN / NSN or by OTO.

5.7.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v40:getConnectivityCheckRequest>
      <v40:request correlationId="anyCorrelation">
        <v40:ispId>777710</v40:ispId>
        <v40:dnVnNsn>0108903487</v40:dnVnNsn>
      </v40:request>
    </v40:getConnectivityCheckRequest>
  </soapenv:Body>
</soapenv:Envelope>

```

5.7.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header/>
  <soapenv:Body>
    <v40:getConnectivityCheckResponse xmlns:v40="http://www.swisscom.com/wsg/tt/v40">
      <v40:response>
        <v40:success>true</v40:success>
        <v40:operationLogId>432689867</v40:operationLogId>
        <v40:ipAddress>255.233.254.254</v40:ipAddress>
        <v40:incSTT>
          <v40:troubleTicketKey>INC000005129081</v40:troubleTicketKey>
          <v40:troubleTicketState>deferred</v40:troubleTicketState>
        </v40:incSTT>
      </v40:response>
    </v40:getConnectivityCheckResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

```

        <v40:resolutionCategorizationTier1/>
        <v40:zip>8805</v40:zip>
        <v40:city>ZH</v40:city>
    </v40:incSTT>
    <v40:incMT>
        <v40:changeRequestId>CRQ000000988122</v40:changeRequestId>
        <v40:resources>
            <v40:nco:ncObjectId>9151129342413558321</v40:nco:ncObjectId>
            <v40:nco:name>ipd-rm5j740-s-ph-01</v40:nco:name>
        </v40:resources>
        <v40:maintenanceStatus>Scheduled</v40:maintenanceStatus>
        <v40:startDateTime>2019-02-08T10:00:00.000+01:00</v40:startDateTime>
        <v40:endDateTime>2019-02-08T17:00:00.000+01:00</v40:endDateTime>
    </v40:incMT>
    <v40:incMT>
        <v40:changeRequestId>10001749881</v40:changeRequestId>
        <v40:resources>
            <v40:nco:ncObjectId>9149125435413461182</v40:nco:ncObjectId>
            <v40:nco:name>ipd-ric740-s-hh-14</v40:nco:name>
        </v40:resources>
        <v40:resources>
            <v40:nco:ncObjectId>9149125435413461179</v40:nco:ncObjectId>
            <v40:nco:name>ipd-ric740-s-hh-14</v40:nco:name>
        </v40:resources>
        <v40:maintenanceStatus>Scheduled</v40:maintenanceStatus>
        <v40:startDateTime>2019-03-01T02:00:00.000+01:00</v40:startDateTime>
        <v40:endDateTime>2019-03-01T06:00:00.000+01:00</v40:endDateTime>
    </v40:incMT>
    <v40:vitality>
        <v40:value>100</v40:value>
        <v40:confidence>100</v40:confidence>
    </v40:vitality>
</v40:response>
</v40:getConnectivityCheckResponse>
</soapenv:Body>
</soapenv:Envelope>

```

6 Assurance (ULL Trouble Ticket)

6.1 Creation of a Trouble Ticket

If an existing ULL subscription does not work (any more) a trouble ticket can be submitted as shown in the following example.

6.1.1 Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v4="http://www.swisscom.com/wsg/fa/v4">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v4:createTroubleTicket>
      <v4:request correlationId="BC_102">
        <v4:ptsId>777710</v4:ptsId>
        <v4:contrEleId>19</v4:contrEleId>
        <v4:dnVnNsn>0188888001</v4:dnVnNsn>
        <v4:ptsPhoneNr>0440000000</v4:ptsPhoneNr>
        <v4:ptsTicketRef>42</v4:ptsTicketRef>
        <v4:endUserName>HP Tester</v4:endUserName>
        <v4:endUserCompany/>
        <v4:endUserPhoneNr>0310000000</v4:endUserPhoneNr>
        <v4:endUserAddress>
          <v4:street>Grubenstrasse</v4:street>
          <v4:houseNr>11</v4:houseNr>
          <v4:zip>3000</v4:zip>
          <v4:city>Urtenen</v4:city>
        </v4:endUserAddress>
        <v4:faTechnology>008</v4:faTechnology>
        <v4:problemDescription>doesn't work</v4:problemDescription>
        <v4:errorCategory>600</v4:errorCategory>
        <v4:problemDateTime>2010-04-05T00:00:00.000+02:00</v4:problemDateTime>
      </v4:request>
    </v4:createTroubleTicket>
  </soapenv:Body>
</soapenv:Envelope>
```

6.2 Get Detail

6.2.1 Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v4="http://www.swisscom.com/wsg/fa/v4">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
```

```
<v4:getDetailTroubleTicket>
  <v4:request correlationId="BC_102">
    <v4:ptsId>777710</v4:ptsId>
    <v4:ttIdWsg>77771020190709000004000000</v4:ttIdWsg>
  </v4:request>
</v4:getDetailTroubleTicket>
</soapenv:Body>
</soapenv:Envelope>
```

6.3 Add WorkLog

6.3.1 Request

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v4="http://www.swisscom.com/wsg/fa/v4">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>theUsername</wsse:Username>
        <wsse:Password>thePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v4:addWorkLog>
      <v4:request>
        <v4:ptsId>777710</v4:ptsId>
        <v4:ttIdWsg>77771020190709000004000000</v4:ttIdWsg>
        <v4:workLog>
          <v4:workLogSummary>Demo Worklog</v4:workLogSummary>
        </v4:workLog>
      </v4:request>
    </v4:addWorkLog>
  </soapenv:Body>
</soapenv:Envelope>
```

7 Voice Messages

Voice Messages can be used to detect if a subscriber has to be modified because of change to its voice service. If for example the subscriber moves to a new location, the BBCS subscription has to be modified too. In this case WSG automatically creates the necessary orders based on the Voice Messages.

7.1 GUI

The following Screenshots show the notifications created for the Voice Messages and the resulting Orders:

Notification Maintenance

[Back](#) [Refresh](#)

Number Of Entries: 30

[First/Prev] 1, 2 [Next/Last]

	Notification ID	ISP ID	Object	Object Type	Initiator	Activator	Object State	Object Step	Event	Transaction Date/Time
Detail	16622066	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	PONR	Order Notification	26.10.2010 13:32:00
Detail	16622065	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	PONR	Order Notification	26.10.2010 13:32:00
Detail	16622064	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	Order Confirmation	Order Notification	26.10.2010 13:28:00
Detail	16622063	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ACCEPTED	Order Confirmation	Order Notification	26.10.2010 13:27:00
Detail	16622062	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	ACCEPTED		Classical Notification	26.10.2010 13:23:00
Detail	16622061	777710	BBCS-Order	BBCS_CREATE	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622060	777710	BBCS-Order	BBCS_CREATE	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622059	777710	BBCS-Order	BBCS_CREATE	SCS	Order	CHECKED		Order Notification	26.10.2010 13:22:00
Detail	16622058	777710	BBCS-Order	BBCS_CREATE	SCS	Order	CHECKED		Order Notification	26.10.2010 13:22:00
Detail	16622057	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	PROCESSING		Order Notification	26.10.2010 13:22:00
Detail	16622056	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	CHECKED		Order Notification	26.10.2010 13:21:00
Detail	16622055	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:20:00
Detail	16622054	777710	BBCS-Order	SRV_ADD	SCS	Order	HOLDING		Order Notification	26.10.2010 13:20:00
Detail	16622053	777710	BBCS-Order	SRV_ADD	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622052	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622051	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622050	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622049	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:19:00
Detail	16622048	777710	BBCS-Order	SRV_ADD	SCS	Order	HOLDING		Order Notification	26.10.2010 13:19:00
Detail	16622047	777710	BBCS-Order	SRV_ADD	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00

[First/Prev] 1, 2 [Next/Last]

Notification Maintenance
[Back](#)
[Refresh](#)

Number Of Entries: 30

[\[First/Prev\]](#) 1, 2 [\[Next/Last\]](#)

	Notification ID	ISP ID	Object	Object Type	Initiator	Activator	Object State	Object Step	Event	Transaction Date/Time
Detail	16622046	777710	BBCS-Order	BBCS_CREATE	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00
Detail	16622045	777710	BBCS-Order	BBCS_DISCONNECT	SCS	Order	ENTERED		Order Notification	26.10.2010 13:18:00
Detail	16622044	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622043	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622042	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:18:37
Detail	16622041	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:41
Detail	16622040	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:41
Detail	16622039	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40
Detail	16622038	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40
Detail	16622037	777710	Voice Business	GV03	SCS	Voice Business			Classical Notification	26.10.2010 13:17:40

[\[First/Prev\]](#) 1, 2 [\[Next/Last\]](#)

7.2 Notifications

During the whole processing, the voice messages and orders can be tracked by retrieving notifications from the Notification Service.

8 Appendix A: Notifications created for order

8.1 Request

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Header>
    <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
      soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
      wssecurity-secext-1.0.xsd">
      <wsse:UsernameToken>
        <wsse:Username>TheUserName</wsse:Username>
        <wsse:Password>ThePassword</wsse:Password>
      </wsse:UsernameToken>
    </wsse:Security>
  </soapenv:Header>
  <soapenv:Body>
    <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:request>
        <v20:ispId>777710</v20:ispId>
        <v20:object>1</v20:object>
        <v20:notificationIdFrom>137743972</v20:notificationIdFrom>
      </v20:request>
    </v20:getNotification>
  </soapenv:Body>
</soapenv:Envelope>
```

8.2 Response

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
      <v20:response>
        <v20:success>true</v20:success>
        <v20:limitReached>false</v20:limitReached>
        <v20:notification>
          <v20:notificationId>137744007</v20:notificationId>
          <v20:notificationDateTime>2017-05-22T10:32:50.426+02:00</v20:notificationDateTime>
          <v20:notificationEvent>1</v20:notificationEvent>
          <v20:object>1</v20:object>
          <v20:objectType>1</v20:objectType>
          <v20:initiator>1</v20:initiator>
          <v20:activator>1</v20:activator>
          <v20:objectState>1</v20:objectState>
          <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:extRef>Regression WS</v20:extRef>
            <v20:contrEleId>120</v20:contrEleId>
            <v20:orderType>1</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
            22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
            22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
          </v20:bbcsOrder>
        </v20:notification>
      </v20:notification>
    </v20:getNotificationResponse>
  </soapenv:Body>
</soapenv:Envelope>
```

```

<v20:notificationEvent>1</v20:notificationEvent>
<v20:object>1</v20:object>
<v20:objectType>13</v20:objectType>
<v20:initiator>1</v20:initiator>
<v20:activator>1</v20:activator>
<v20:objectState>1</v20:objectState>
<v20:bbcsOrder>
  <v20:orderNr>77771020170522000034000000</v20:orderNr>
  <v20:dnVnNsn>0108728519</v20:dnVnNsn>
  <v20:extRef>Regression SrvAdd Internet</v20:extRef>
  <v20:contrEleId>100</v20:contrEleId>
  <v20:orderType>13</v20:orderType>
  <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
  <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
  <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
  <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
  <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  <v20:speedProfileNr>203</v20:speedProfileNr>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744009</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:34:43.723+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>1</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000032000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:extRef>Regression WS</v20:extRef>
    <v20:contrEleId>120</v20:contrEleId>
    <v20:orderType>1</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>13</v20:dnType>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
  </v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744010</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:36:06.367+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000032000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
    <v20:extRef>Regression WS</v20:extRef>
    <v20:contrEleId>120</v20:contrEleId>
  </v20:bbcsOrder>
</v20:notification>

```

```

        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool12</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744011</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:36:06.514+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>5</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool12</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744012</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:37:13.285+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>2</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000036000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
        <v20:contrEleId>110</v20:contrEleId>
        <v20:orderType>2</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744013</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:38:49.073+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000036000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>1</v20:dnType>
                <v20:opStatus>2</v20:opStatus>
                <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:psdClass>20</v20:psdClass>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744014</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:39:29.764+02:00</v20:notificationDateTime>
            <v20:notificationEvent>2</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>1</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>6</v20:objectState>
            <v20:objectStep>4</v20:objectStep>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000032000000</v20:orderNr>
                <v20:dnVnNsn>0108728519</v20:dnVnNsn>
                <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
                <v20:extRef>Regression WS</v20:extRef>
                <v20:reasonComment>Order confirmed, UP Information now
available</v20:reasonComment>
                <v20:contrEleId>120</v20:contrEleId>
                <v20:orderType>1</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            </v20:bbcsOrder>
        </v20:notification>
    </v20:bbcsOrder>
</v20:bbcsOrder>

```

```

    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:cableBox>
      <v20:boardNr>19</v20:boardNr>
      <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
      <v20:contactType>5</v20:contactType>
      <v20:contactNr>11</v20:contactNr>
      <v20:coordinateX>694135</v20:coordinateX>
      <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrofWires>2</v20:nrofWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>
      <v20:taxRegion>64</v20:taxRegion>
      <v20:accessNet>BOL</v20:accessNet>
      <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
      <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
  </v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744015</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:40:33.357+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>1</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>6</v20:objectState>
  <v20:objectStep>1</v20:objectStep>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000032000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
    <v20:extRef>Regression WS</v20:extRef>
    <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
    <v20:contrEleId>120</v20:contrEleId>
    <v20:orderType>1</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>13</v20:dnType>
    <v20:poolType>pool2</v20:poolType>
    <v20:interleaveMode>2</v20:interleaveMode>
    <v20:opStatus>7</v20:opStatus>
    <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:cableBox>
      <v20:boardNr>19</v20:boardNr>
      <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
      <v20:contactType>5</v20:contactType>
      <v20:contactNr>11</v20:contactNr>
      <v20:coordinateX>694135</v20:coordinateX>
      <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrofWires>2</v20:nrofWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>

```

```

        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744016</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:40:40.768+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>18</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000038000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs change Type</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>18</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>209</v20:speedProfileNr>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744017</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:40:41.588+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>14</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000039000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionSrvTst</v20:extRef>
        <v20:contrEleId>9</v20:contrEleId>
        <v20:orderType>14</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:customerOrderNr>77771020170522000037000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744018</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:11.407+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>

```

```

    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000032000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
      <v20:extRef>Regression WS</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>120</v20:contrEleId>
      <v20:orderType>1</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:poolType>pool12</v20:poolType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>7</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:cableBox>
        <v20:boardNr>19</v20:boardNr>
        <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
        <v20:contactType>5</v20:contactType>
        <v20:contactNr>11</v20:contactNr>
        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
      </v20:cableBox>
      <v20:nrofWires>2</v20:nrofWires>
      <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
      <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
      <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
      </v20:endPoint>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744019</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:27.063+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000032000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
      <v20:extRef>Regression WS</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>120</v20:contrEleId>
      <v20:orderType>1</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:cableBox>
                    <v20:boardNr>19</v20:boardNr>
                    <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                    <v20:contactType>5</v20:contactType>
                    <v20:contactNr>11</v20:contactNr>
                    <v20:coordinateX>694135</v20:coordinateX>
                    <v20:coordinateY>266730</v20:coordinateY>
                </v20:cableBox>
                <v20:nrOfWires>2</v20:nrOfWires>
                <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
                <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
                <v20:endPoint>
                    <v20:taxRegion>64</v20:taxRegion>
                    <v20:accessNet>BOL</v20:accessNet>
                    <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
                    <v20:site>BOLQ</v20:site>
                </v20:endPoint>
                <v20:psdClass>20</v20:psdClass>
                <v20:networkType>3</v20:networkType>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744020</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T10:43:27.697+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>1</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>6</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000032000000</v20:orderNr>
                <v20:dnVnNsn>0108728519</v20:dnVnNsn>
                <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
                <v20:extRef>Regression WS</v20:extRef>
                <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
                <v20:contrEleId>120</v20:contrEleId>
                <v20:orderType>1</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>13</v20:dnType>
                <v20:poolType>pool2</v20:poolType>
                <v20:interleaveMode>2</v20:interleaveMode>
                <v20:opStatus>7</v20:opStatus>
                <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:cableBox>
                    <v20:boardNr>19</v20:boardNr>
                    <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                    <v20:contactType>5</v20:contactType>
                    <v20:contactNr>11</v20:contactNr>

```

```

        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrOfWires>2</v20:nrOfWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744021</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:27.942+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:cableBox>
        <v20:boardNr>19</v20:boardNr>
        <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
        <v20:contactType>5</v20:contactType>
        <v20:contactNr>11</v20:contactNr>
        <v20:coordinateX>694135</v20:coordinateX>
        <v20:coordinateY>266730</v20:coordinateY>
    </v20:cableBox>
    <v20:nrOfWires>2</v20:nrOfWires>
    <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
    <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
    <v20:endPoint>
        <v20:taxRegion>64</v20:taxRegion>
        <v20:accessNet>BOL</v20:accessNet>
        <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
        <v20:site>BOLQ</v20:site>
    </v20:endPoint>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>

```

```

        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744022</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:43:31.696+02:00</v20:notificationDateTime>
        <v20:notificationEvent>2</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>1</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>7</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
            <v20:extRef>Regression WS</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>120</v20:contrEleId>
            <v20:orderType>1</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:poolType>pool2</v20:poolType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>7</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:cableBox>
                <v20:boardNr>19</v20:boardNr>
                <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
                <v20:contactType>5</v20:contactType>
                <v20:contactNr>11</v20:contactNr>
                <v20:coordinateX>694135</v20:coordinateX>
                <v20:coordinateY>266730</v20:coordinateY>
            </v20:cableBox>
            <v20:nrOfWires>2</v20:nrOfWires>
            <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
            <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
            <v20:endPoint>
                <v20:taxRegion>64</v20:taxRegion>
                <v20:accessNet>BOL</v20:accessNet>
                <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
                <v20:site>BOLQ</v20:site>
            </v20:endPoint>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744023</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:43:36.584+02:00</v20:notificationDateTime>
        <v20:notificationEvent>2</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>1</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>7</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000032000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>

```

```

        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:cableBox>
            <v20:boardNr>19</v20:boardNr>
            <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
            <v20:contactType>5</v20:contactType>
            <v20:contactNr>11</v20:contactNr>
            <v20:coordinateX>694135</v20:coordinateX>
            <v20:coordinateY>266730</v20:coordinateY>
        </v20:cableBox>
        <v20:nrofWires>2</v20:nrofWires>
        <v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
        <v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
        <v20:endPoint>
            <v20:taxRegion>64</v20:taxRegion>
            <v20:accessNet>BOL</v20:accessNet>
            <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
            <v20:site>BOLQ</v20:site>
        </v20:endPoint>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744026</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:43:51.906+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>1</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>13</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000032000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>170</v20:speedProfileNrAccess>
        <v20:extRef>Regression WS</v20:extRef>
        <v20:contrEleId>120</v20:contrEleId>
        <v20:orderType>1</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:poolType>pool2</v20:poolType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>7</v20:opStatus>

```

```

<v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
<v20:accessSpeedChanged>1</v20:accessSpeedChanged>
<v20:cableBox>
  <v20:boardNr>19</v20:boardNr>
  <v20:switchingPlaceNr>0</v20:switchingPlaceNr>
  <v20:contactType>5</v20:contactType>
  <v20:contactNr>11</v20:contactNr>
  <v20:coordinateX>694135</v20:coordinateX>
  <v20:coordinateY>266730</v20:coordinateY>
</v20:cableBox>
<v20:nrOfWires>2</v20:nrOfWires>
<v20:dslamName>IPC-HIR710-S-DM-11</v20:dslamName>
<v20:bbLogPortNr>ADSL-4-3-2-17</v20:bbLogPortNr>
<v20:endPoint>
  <v20:taxRegion>64</v20:taxRegion>
  <v20:accessNet>BOL</v20:accessNet>
  <v20:bbDeviceLocation>DELOC</v20:bbDeviceLocation>
  <v20:site>BOLQ</v20:site>
</v20:endPoint>
<v20:psdClass>20</v20:psdClass>
<v20:networkType>3</v20:networkType>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744025</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:45:08.271+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>13</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000034000000</v20:orderNr>
    <v20:dnVnNsn>0108728519</v20:dnVnNsn>
    <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
    <v20:extRef>Regression SrvAdd Internet</v20:extRef>
    <v20:contrEleId>100</v20:contrEleId>
    <v20:orderType>13</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>13</v20:dnType>
    <v20:interleaveMode>2</v20:interleaveMode>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
    <v20:networkType>3</v20:networkType>
  </v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744026</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T10:45:08.745+02:00</v20:notificationDateTime>
  <v20:notificationEvent>2</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>13</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000034000000</v20:orderNr>

```

```

        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744027</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:47:53.449+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:objectStep>4</v20:objectStep>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Order confirmed, UP Information now
available</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744028</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:48:57.857+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:objectStep>1</v20:objectStep>
    <v20:bbcsOrder>

```

```

        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744029</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:10.380+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744030</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:26.091+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>

```

```

    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744031</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:26.621+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744032</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:51:28.974+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>

```

```

        <v20:objectState>6</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000034000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
            <v20:extRef>Regression SrvAdd Internet</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>100</v20:contrEleId>
            <v20:orderType>13</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744033</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:51:31.728+02:00</v20:notificationDateTime>
        <v20:notificationEvent>1</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>13</v20:objectType>
        <v20:initiator>1</v20:initiator>
        <v20:activator>1</v20:activator>
        <v20:objectState>6</v20:objectState>
        <v20:bbcsOrder>
            <v20:orderNr>77771020170522000034000000</v20:orderNr>
            <v20:dnVnNsn>0108728519</v20:dnVnNsn>
            <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
            <v20:extRef>Regression SrvAdd Internet</v20:extRef>
            <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
            <v20:contrEleId>100</v20:contrEleId>
            <v20:orderType>13</v20:orderType>
            <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
            <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
            <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
            <v20:bbType>2</v20:bbType>
            <v20:dnType>13</v20:dnType>
            <v20:interleaveMode>2</v20:interleaveMode>
            <v20:opStatus>2</v20:opStatus>
            <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
            <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            <v20:psdClass>20</v20:psdClass>
            <v20:networkType>3</v20:networkType>
        </v20:bbcsOrder>
    </v20:notification>
    <v20:notification>
        <v20:notificationId>137744034</v20:notificationId>
        <v20:notificationDateTime>2017-05-22T10:53:11.314+02:00</v20:notificationDateTime>
        <v20:notificationEvent>1</v20:notificationEvent>
        <v20:object>1</v20:object>
        <v20:objectType>13</v20:objectType>
        <v20:initiator>1</v20:initiator>

```

```

    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:speedProfileNr>203</v20:speedProfileNr>
      <v20:effectiveSpeed>
        <v20:up>500</v20:up>
        <v20:down>5000</v20:down>
      </v20:effectiveSpeed>
      <v20:psdClass>20</v20:psdClass>
      <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
  </v20:notification>
  <v20:notification>
    <v20:notificationId>137744035</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:26.954+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>6</v20:objectState>
    <v20:bbcsOrder>
      <v20:orderNr>77771020170522000034000000</v20:orderNr>
      <v20:dnVnNsn>0108728519</v20:dnVnNsn>
      <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
      <v20:extRef>Regression SrvAdd Internet</v20:extRef>
      <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
      <v20:contrEleId>100</v20:contrEleId>
      <v20:orderType>13</v20:orderType>
      <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
      <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
      <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
      <v20:bbType>2</v20:bbType>
      <v20:dnType>13</v20:dnType>
      <v20:interleaveMode>2</v20:interleaveMode>
      <v20:opStatus>2</v20:opStatus>
      <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
      <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
      <v20:speedProfileNr>203</v20:speedProfileNr>
      <v20:effectiveSpeed>
        <v20:up>500</v20:up>
        <v20:down>5000</v20:down>
      </v20:effectiveSpeed>
    </v20:bbcsOrder>
  </v20:notification>

```

```

        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744036</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:27.870+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>7</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:effectiveSpeed>
            <v20:up>500</v20:up>
            <v20:down>5000</v20:down>
        </v20:effectiveSpeed>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744037</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:29.578+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>7</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:reasonComment>Point of no return; PONR Point of no
return</v20:reasonComment>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>

```

```

        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:effectiveSpeed>
            <v20:up>500</v20:up>
            <v20:down>5000</v20:down>
        </v20:effectiveSpeed>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744038</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T10:53:56.311+02:00</v20:notificationDateTime>
    <v20:notificationEvent>2</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>13</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>13</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000034000000</v20:orderNr>
        <v20:dnVnNsn>0108728519</v20:dnVnNsn>
        <v20:speedProfileNrAccess>59</v20:speedProfileNrAccess>
        <v20:extRef>Regression SrvAdd Internet</v20:extRef>
        <v20:contrEleId>100</v20:contrEleId>
        <v20:orderType>13</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T11:00:00.000+02:00</v20:estimatedDueDateStart>
        <v20:estimatedDueDateEnd>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateEnd>
        <v20:bbType>2</v20:bbType>
        <v20:dnType>13</v20:dnType>
        <v20:interleaveMode>2</v20:interleaveMode>
        <v20:opStatus>2</v20:opStatus>
        <v20:customerOrderNr>77771020170522000033000000</v20:customerOrderNr>
        <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
        <v20:speedProfileNr>203</v20:speedProfileNr>
        <v20:psdClass>20</v20:psdClass>
        <v20:networkType>3</v20:networkType>
    </v20:bbcsOrder>
</v20:notification>
<v20:notification>
    <v20:notificationId>137744039</v20:notificationId>
    <v20:notificationDateTime>2017-05-22T11:34:16.012+02:00</v20:notificationDateTime>
    <v20:notificationEvent>1</v20:notificationEvent>
    <v20:object>1</v20:object>
    <v20:objectType>2</v20:objectType>
    <v20:initiator>1</v20:initiator>
    <v20:activator>1</v20:activator>
    <v20:objectState>1</v20:objectState>
    <v20:bbcsOrder>
        <v20:orderNr>77771020170522000046000000</v20:orderNr>
        <v20:dnVnNsn>0719875577</v20:dnVnNsn>
        <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
        <v20:contrEleId>110</v20:contrEleId>
        <v20:orderType>2</v20:orderType>
        <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
        <v20:estimatedDueDateStart>2017-05-
22T12:00:00.000+02:00</v20:estimatedDueDateStart>

```

```

                <v20:estimatedDueDateEnd>2017-05-
22T14:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000047000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744040</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T11:36:13.604+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000046000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T12:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T14:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:dnType>1</v20:dnType>
                <v20:opStatus>2</v20:opStatus>
                <v20:customerOrderNr>77771020170522000047000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
                <v20:psdClass>20</v20:psdClass>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744041</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T12:17:29.135+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>
            <v20:objectType>2</v20:objectType>
            <v20:initiator>1</v20:initiator>
            <v20:activator>1</v20:activator>
            <v20:objectState>1</v20:objectState>
            <v20:bbcsOrder>
                <v20:orderNr>77771020170522000048000000</v20:orderNr>
                <v20:dnVnNsn>0719875577</v20:dnVnNsn>
                <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
                <v20:contrEleId>110</v20:contrEleId>
                <v20:orderType>2</v20:orderType>
                <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
                <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
                <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
                <v20:bbType>2</v20:bbType>
                <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
                <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
            </v20:bbcsOrder>
        </v20:notification>
        <v20:notification>
            <v20:notificationId>137744042</v20:notificationId>
            <v20:notificationDateTime>2017-05-22T12:17:29.787+02:00</v20:notificationDateTime>
            <v20:notificationEvent>1</v20:notificationEvent>
            <v20:object>1</v20:object>

```

```

<v20:objectType>13</v20:objectType>
<v20:initiator>1</v20:initiator>
<v20:activator>1</v20:activator>
<v20:objectState>1</v20:objectState>
<v20:bbcsOrder>
  <v20:orderNr>77771020170522000050000000</v20:orderNr>
  <v20:dnVnNsn>0719875577</v20:dnVnNsn>
  <v20:extRef>extRef RegressionSrvTst</v20:extRef>
  <v20:contrEleId>9</v20:contrEleId>
  <v20:orderType>13</v20:orderType>
  <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
  <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
  <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
  <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
  <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
  <v20:speedProfileNr>0</v20:speedProfileNr>
</v20:bbcsOrder>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744043</v20:notificationId>
  <v20:notificationDateTime>2017-05-22T12:19:16.747+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>1</v20:object>
  <v20:objectType>2</v20:objectType>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>1</v20:objectState>
  <v20:bbcsOrder>
    <v20:orderNr>77771020170522000048000000</v20:orderNr>
    <v20:dnVnNsn>0719875577</v20:dnVnNsn>
    <v20:extRef>extRef RegressionWs modify Type</v20:extRef>
    <v20:contrEleId>110</v20:contrEleId>
    <v20:orderType>2</v20:orderType>
    <v20:customerWishDate>2017-05-22+02:00</v20:customerWishDate>
    <v20:estimatedDueDateStart>2017-05-
22T13:00:00.000+02:00</v20:estimatedDueDateStart>
    <v20:estimatedDueDateEnd>2017-05-
22T15:00:00.000+02:00</v20:estimatedDueDateEnd>
    <v20:bbType>2</v20:bbType>
    <v20:dnType>1</v20:dnType>
    <v20:opStatus>2</v20:opStatus>
    <v20:customerOrderNr>77771020170522000049000000</v20:customerOrderNr>
    <v20:accessSpeedChanged>1</v20:accessSpeedChanged>
    <v20:psdClass>20</v20:psdClass>
  </v20:bbcsOrder>
</v20:notification>
</v20:response>
</v20:getNotificationResponse>
</soapenv:Body>
</soapenv:Envelope>

```

9 Appendix B: Notifications created for iso-8859-1

```

<?xml version="1.0" encoding="iso-8859-1"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <v15:disconnectResponse xmlns:v15="http://www.swisscom.com/wsg/fa/v15">
      <v15:response correlationId="Regr Test Disconnect">
        <v15:success>true</v15:success>
        <v15:operationLogId>432709271</v15:operationLogId>
        <v15:orderNr>77771020180219000005000000</v15:orderNr>
      </v15:response>
    </v15:disconnectResponse>
  </soapenv:Body>
</soapenv:Envelope>

```

```

        </v15:disconnectResponse>
    </soapenv:Body>
</soapenv:Envelope>

```

10 Appendix C: Notification created for trouble ticket

10.1 Request

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
    <soapenv:Header>
        <wsse:Security soapenv:actor="http://schemas.xmlsoap.org/soap/actor/next"
soapenv:mustUnderstand="0" xmlns:wsse="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecurity-secext-1.0.xsd">
            <wsse:UsernameToken>
                <wsse:Username>TheUserName</wsse:Username>
                <wsse:Password>ThePassword</wsse:Password>
            </wsse:UsernameToken>
        </wsse:Security>
    </soapenv:Header>
    <soapenv:Body>
        <v20:getNotification xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
            <v20:request>
                <v20:ispId>777710</v20:ispId>
                <v20:object>3</v20:object>
                <v20:notificationIdFrom>137743972</v20:notificationIdFrom>
            </v20:request>
        </v20:getNotification>
    </soapenv:Body>
</soapenv:Envelope>

```

10.2 Response

```

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
    <soapenv:Body>
        <v20:getNotificationResponse xmlns:v20="http://www.swisscom.com/wsg/notification/v20">
            <v20:response>
                <v20:success>true</v20:success>
                <v20:limitReached>false</v20:limitReached>
                <v20:notification>
                    <v20:notificationId>137744131</v20:notificationId>
                    <v20:notificationDateTime>2017-07-12T13:26:16.000+02:00</v20:notificationDateTime>
                    <v20:notificationEvent>1</v20:notificationEvent>
                    <v20:object>3</v20:object>
                    <v20:initiator>1</v20:initiator>
                    <v20:activator>1</v20:activator>
                    <v20:objectState>1</v20:objectState>
                    <v20:ispApplicationId>100900</v20:ispApplicationId>
                    <v20:bbcsAccessTt>
                        <v20:ttIdWsg>2447602</v20:ttIdWsg>
                        <v20:dnVnNsn>0108542092</v20:dnVnNsn>
                        <v20:extRef>WS_TEST_1</v20:extRef>
                        <v20:saSlaRequested>1</v20:saSlaRequested>
                        <v20:speedProfileNr>248</v20:speedProfileNr>
                    </v20:bbcsAccessTt>
                </v20:notification>
                <v20:notification>
                    <v20:notificationId>137744132</v20:notificationId>
                    <v20:notificationDateTime>2017-07-12T13:26:16.000+02:00</v20:notificationDateTime>
                    <v20:notificationEvent>1</v20:notificationEvent>
                    <v20:object>3</v20:object>
                    <v20:initiator>1</v20:initiator>

```

```

<v20:activator>1</v20:activator>
<v20:objectState>3</v20:objectState>
<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744133</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:18.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744134</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:18.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>4</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseComment>Sent to TT system</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744135</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>

```

```

<v20:objectState>4</v20:objectState>
<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:responseComment>Received by TT system</v20:responseComment>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744136</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseComment>Processing by TT system</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744137</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:23.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>5</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:progressCommentCode>60</v20:progressCommentCode>
    <v20:responseComment>dispatching</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744138</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>

```

```

<v20:initiator>1</v20:initiator>
<v20:activator>1</v20:activator>
<v20:objectState>5</v20:objectState>
<v20:ispApplicationId>100900</v20:ispApplicationId>
<v20:bbcsAccessTt>
  <v20:ttIdWsg>2447602</v20:ttIdWsg>
  <v20:dnVnNsn>0108542092</v20:dnVnNsn>
  <v20:extRef>WS_TEST_1</v20:extRef>
  <v20:progressCommentCode>58</v20:progressCommentCode>
  <v20:responseComment>done</v20:responseComment>
  <v20:saSla>4</v20:saSla>
  <v20:speedProfileNr>248</v20:speedProfileNr>
  <v20:effectiveSpeed>
    <v20:up>400</v20:up>
    <v20:down>2000</v20:down>
  </v20:effectiveSpeed>
</v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744139</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>6</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:progressCommentCode>64</v20:progressCommentCode>
    <v20:responseComment>closed confirmed</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
<v20:notification>
  <v20:notificationId>137744140</v20:notificationId>
  <v20:notificationDateTime>2017-07-12T13:26:24.000+02:00</v20:notificationDateTime>
  <v20:notificationEvent>1</v20:notificationEvent>
  <v20:object>3</v20:object>
  <v20:initiator>1</v20:initiator>
  <v20:activator>1</v20:activator>
  <v20:objectState>6</v20:objectState>
  <v20:ispApplicationId>100900</v20:ispApplicationId>
  <v20:bbcsAccessTt>
    <v20:ttIdWsg>2447602</v20:ttIdWsg>
    <v20:dnVnNsn>0108542092</v20:dnVnNsn>
    <v20:extRef>WS_TEST_1</v20:extRef>
    <v20:responseCommentCode>207</v20:responseCommentCode>
    <v20:responseComment>IP-Access Swisscom O.K.</v20:responseComment>
    <v20:saSla>4</v20:saSla>
    <v20:speedProfileNr>248</v20:speedProfileNr>
    <v20:effectiveSpeed>
      <v20:up>400</v20:up>
      <v20:down>2000</v20:down>
    </v20:effectiveSpeed>
  </v20:bbcsAccessTt>
</v20:notification>
</v20:response>

```

```
</v20:getNotificationResponse>  
</soapenv:Body>  
</soapenv:Envelope>
```